

HÄFELE



LOX5

The LED lighting system
for furniture and rooms.

5

Contents

Introduction

Further development

System

Colour codes
Control
Planning

Illuminating

Page

2

Linear light

LED strip lights
LED silicone strip lights
Surface mounted light
Glass edge light
Drawer lights
Aluminium profiles
Plastic profiles

Point light

Recess/surface mounted
downlights
Recess mounted downlights
Surface mounted downlights
Surface mounted lights
Flexible surface mounted lights

Extending

Page

82

Charging stations
Sound systems

Switching

Page

86

Sensor switches
Mechanical switches
Dimmer interface
Multi switch box
Multi driver box

Networking

Page

96

Häfele Connect Mesh

6-way distributor
Adapter multi-white, RGB,
fittings
Remote control
Push button switch,
wall mounted
2-channel interface

Distributing

Page

102

Term definition

Distributor
Extension leads
Modular leads
Switch leads
Leads and connectors
for LED strip lights

Adapters Loox5/Loox

Mains leads
Cable routing

Supplying

Page

118

Connections and control concept

Drivers
Converters

Additional information

Page

126

Technical data LED strip lights


Inspirations for
designing with light
Light effects
and lighting technology
Test symbols and symbols
Technical terms
Technical questions
Documentation on the Internet
Article index
Address information

Linear light

Page

2

High-performance LED strip lights and design-oriented aluminium profiles – also available in the trendy colours black and brushed stainless steel coloured.

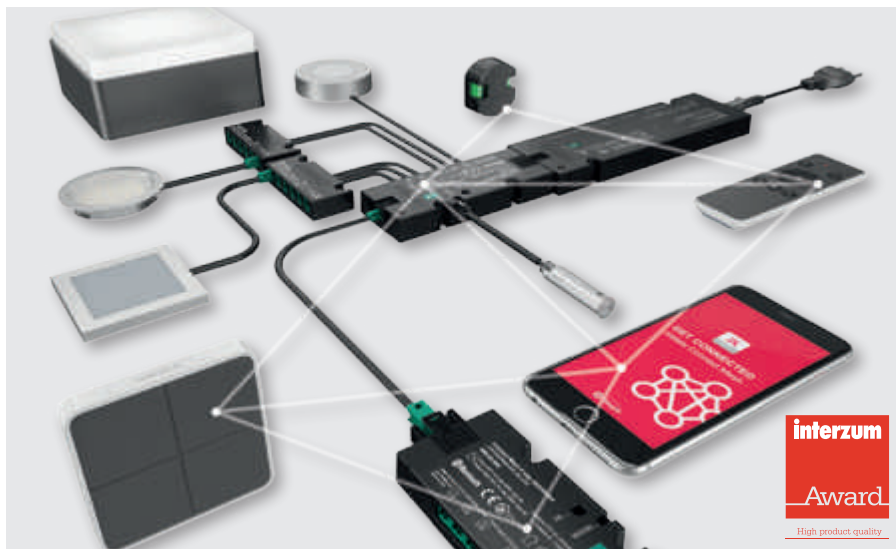

Häfele Connect Mesh

Page

96

The wireless network of lights and electrically operated fittings – with optional integration of the electrical installation of buildings.



Compatibility > Page 114

Adapters ensure compatibility: Using different Loox generations in one installation.



Technical data > Page 126


By professionals for professionals – all facts about LED strip lights at a glance.



Task light, Ambient light, Accent light > Page 144

Suitable areas of application for each light – now in a quick overview.

on.

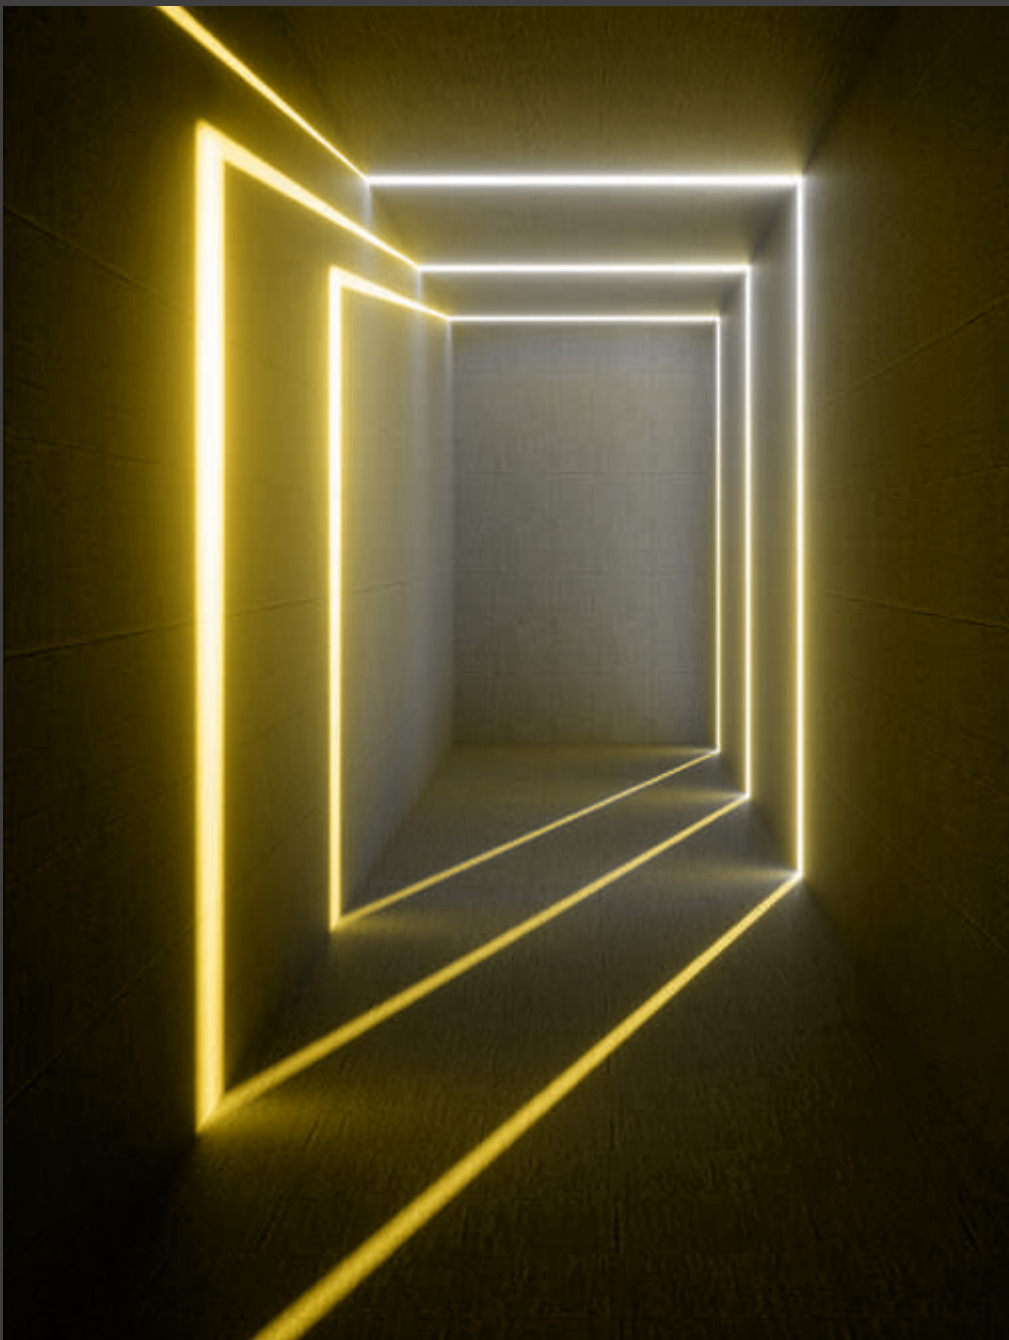

LOOX5



We have spent about 100,000 hours working with LED lights, we have developed and researched, we have had many valuable discussions with partners in trade and industry – and we have learned a great deal. The market is demanding digital answers.


The result after four generations of Loox LED lights is therefore not simply further development, but a new level. Our development has accelerated. Because the world is accelerating, and the demands of our customers are growing at an equally rapid rate.

The essence of four generations.

We are driven by the same questions
time and time again.

How can it be made easier?
How can it be made better?
How can it be made more intelligent?

5



The essence of our experience
therefore has a new face.

Welcome to Loox5.



**Easy.
Logical.
Linear.**



Loox5

Supplying.

Output current 5 A. Suitable for longer installation routes.
Engineered by Häfele.

Loox5

Distributing.

Wired.

6-way distributor for monochrome lights. With connector for all standard switches from the Loox product range.



Straight down the line.

Loox5

Networking.

Wireless.

Häfele Connect Mesh 6-way distributor.
For RGB, multi-white and monochrome
lights. Engineered by Häfele.

Häfele Connect
Mesh push
button, wall
mounted



Push button,
wall mounted
External
product



Networking via
Häfele Connect
Mesh 2-channel
interface

Häfele Connect
Mesh App




Häfele Connect
Mesh remote
control



Loox5

Illuminating.

Equipped with high-quality LEDs
made by Samsung.

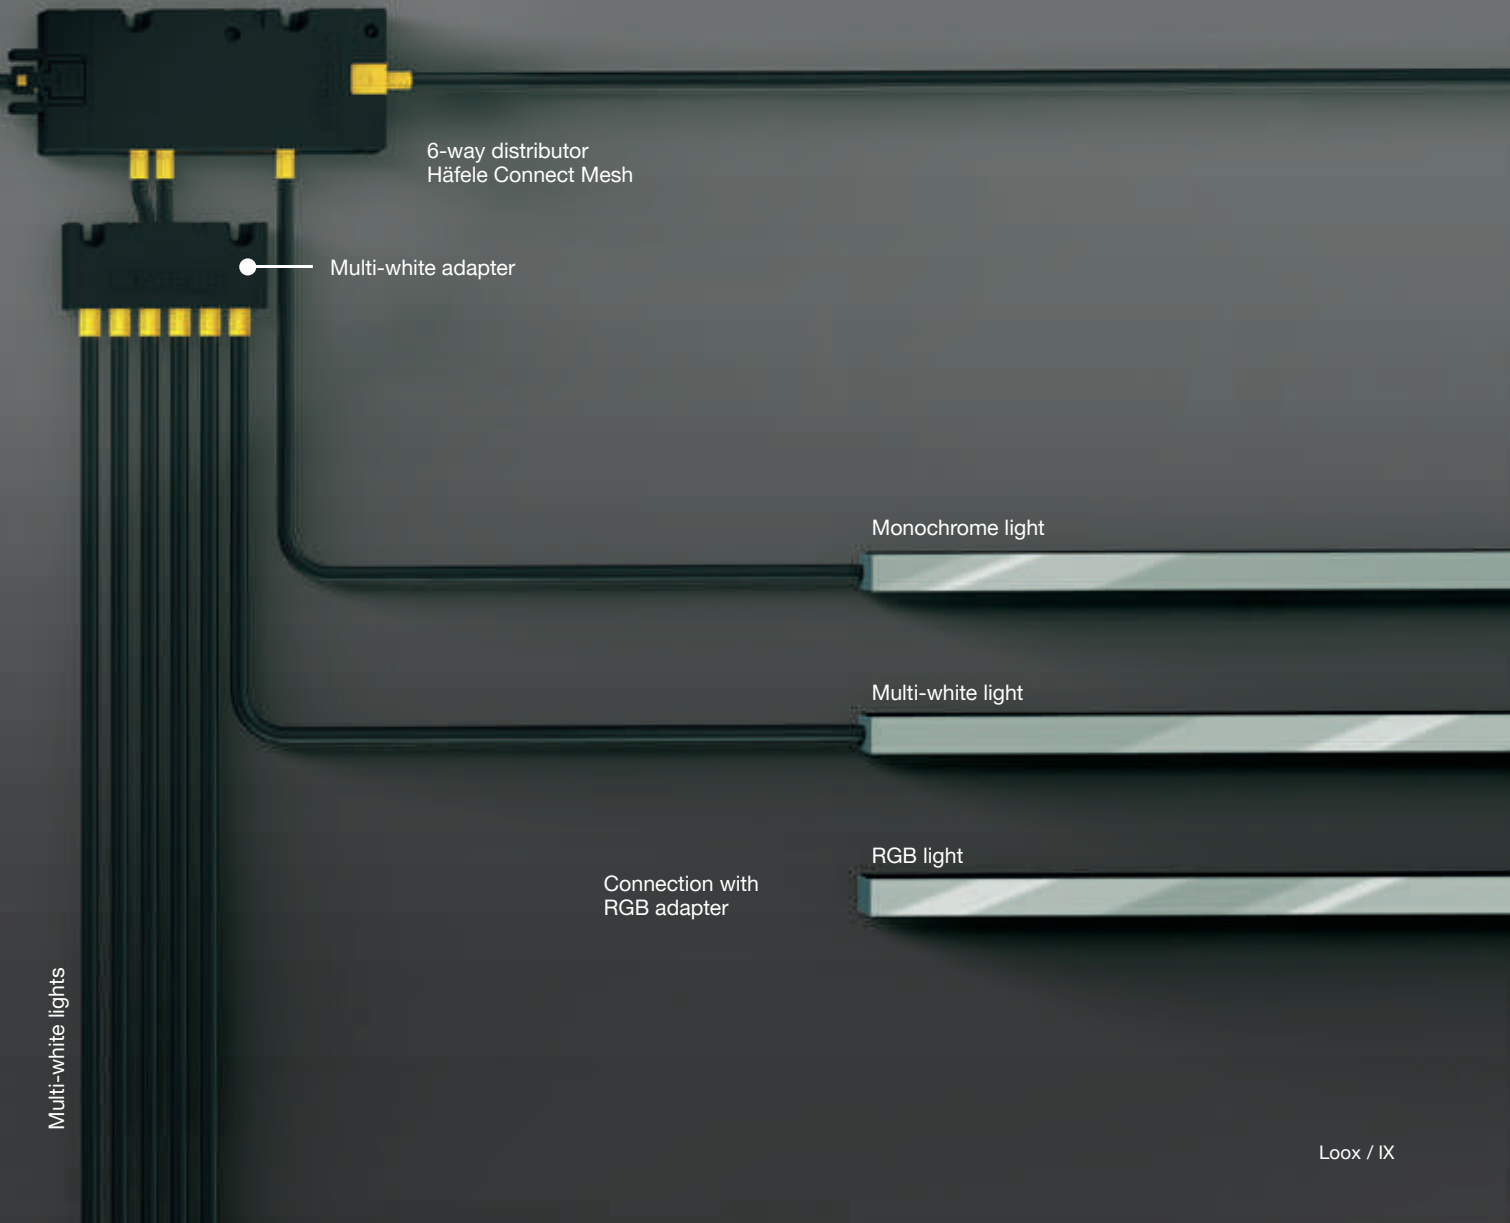

Loox5

Colour codes.



Yellow-in-yellow
The Loox5 system with
12 volts


**Intu
con.**

itive
nec tions.

24

Green-in-green
The Loox5 system with

24 volts




Monochrome



RGB



Multi-white



RGB, multi-white, monochrome light.
The Häfele Connect Mesh 6-way distributor
controls everything. At once. Wireless.

Intelligent light, intelligently solved.

All-in-one

—
**The Loox5
light control.**


Häfele Connect Mesh 6-way distributor.



Häfele Connect Mesh App

Häfele Connect Mesh push button, wall mounted

Häfele Connect Mesh remote control

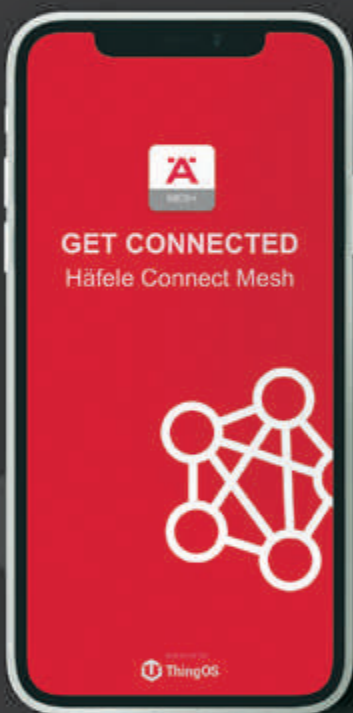

Control light and configure the lighting individually – it's that simple with the Loox5 system: all of the Loox5 lights installed in the house "register" in the Häfele Connect Mesh App and are integrated into the app interface in just a few steps. Now the lights can be individually activated, dimmed, their light colour can be changed, or they can be


simply switched on and off. At the same time, different lighting scenarios can be created and saved. Operation can take place completely in accordance with requirements: via the app, via remote control or using wall-mounted push buttons. Integrating the Häfele Connect Mesh 2-channel interface also makes every standard wall-mounted

push button compatible with the app. Loox5. A modular networking kit which can be described with one word: EASY.


Light is easy.

Few criteria.
Many solutions.


Light colour	Monochrome Multi-white RGB
Light intensity	Task light Ambient light Accent light
Light source	Linear light Point light
Alignment	Directly or indirectly Up or down Forward or backward To the side
Position on the cabinet	Outside Inside
Installation type	Recess mounted Surface mounted

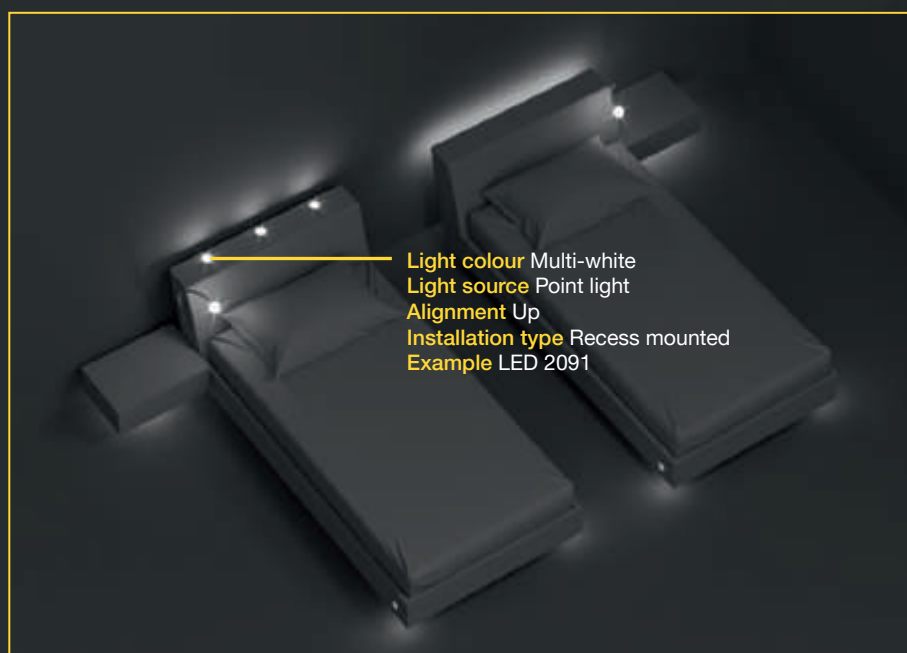

Light in the sleeping area.
Ambience full of atmosphere for rest areas.

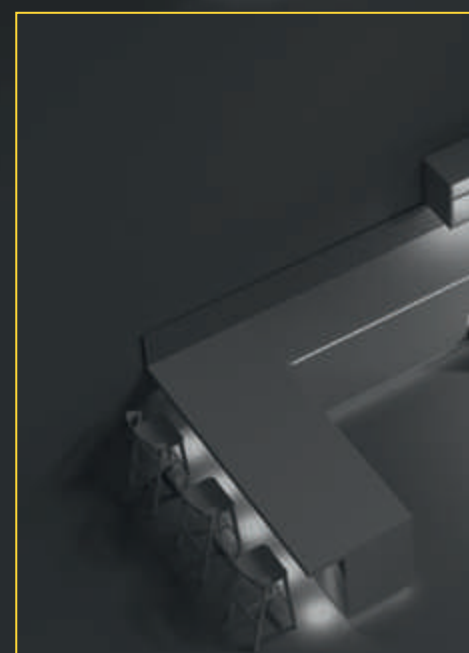


Light in the kitchen.
Functionality for every action.




Light colour Monochrome
Light intensity Ambient light
Light source Linear light
Alignment To the side
Installation type Attached at the side to the circular mounting plate behind the mirror
Example LED 3040, just 5 mm wide for slim design applications

Light in the storage space.


Orientation for perfect organisation.

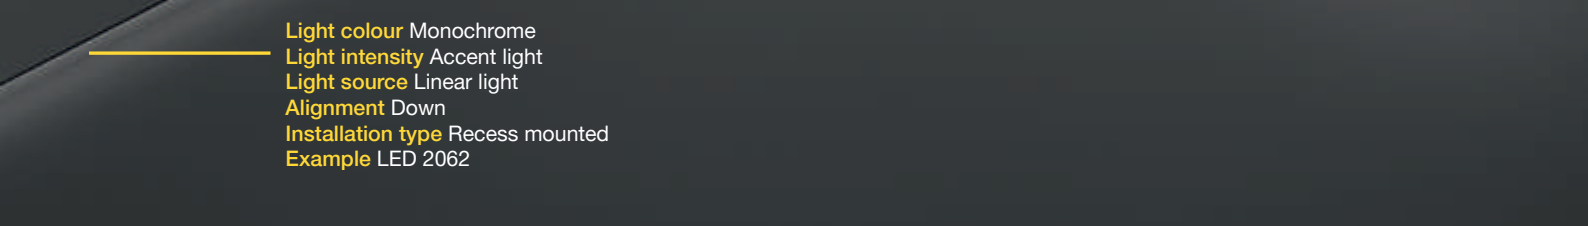

Light colour Monochrome
Light intensity Accent light
Light source Linear light
Alignment Down
Installation type Recess mounted
Example LED 2062

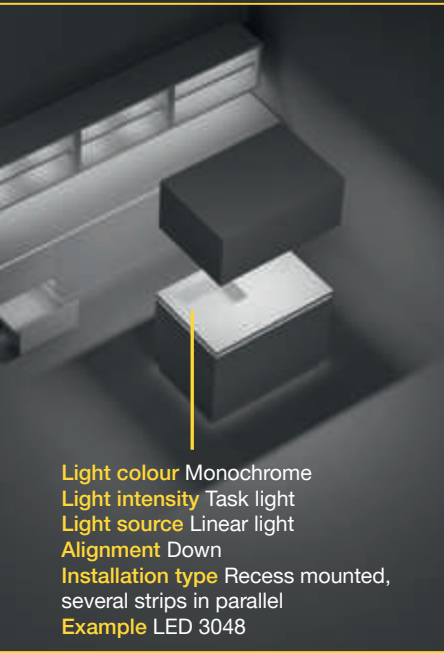

Light colour Monochrome
Light intensity Task light
Light source Linear light
Alignment Down
Installation type Recess mounted, several strips in parallel
Example LED 3048

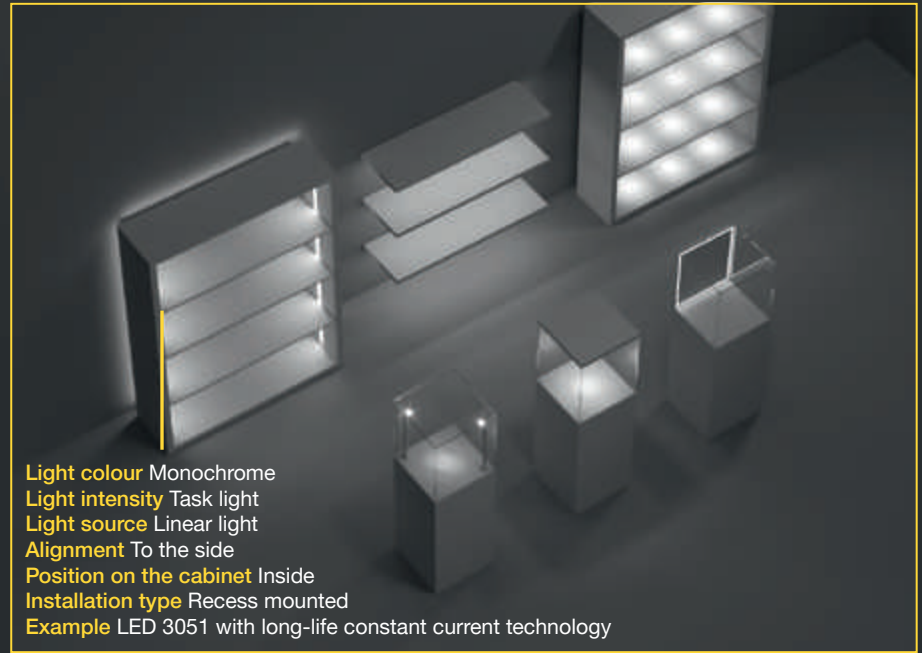


Light colour Monochrome
Light intensity Task light
Light source Linear light
Alignment To the side
Position on the cabinet Inside
Installation type Recess mounted
Example LED 3051 with long-life constant current technology

Light in store fixtures.

Value for the presentation of goods.

Light is plannable.

The need to observe only a few planning steps structures and simplifies the planning of lighting in furniture.



Illuminating.

At the start of the development process, determine the lighting purposes of the furniture (multiple choices possible)

- > Task light for pleasant and safe working
- > Ambient light for highlighting, staging or emotionalising
- > Accent light for storage spaces or paths

Also take into account the overall brightness of the room and the finishes to be illuminated: Sufficiently bright ceiling lighting or sunlight makes the orientation light unnecessary during the day, but at night it may be very pleasant if the ceiling lighting does not need to be used and a few furniture pieces provide some orientation light.

For confidence in the planning process, test lighting and finishes or use bright lighting with dimmers to achieve a balance of incident light and reflection.

The form factor of a light (linear, point) and the number used affects the planarity of the illumination. Light colour, installation type, position on the cabinet, and alignment are further criteria to select the perfect light.



Extending.

Häfele Loox5 drivers supply not only lights, but also charging stations (inductive and USB), audio systems, as well as electrically operated flap fittings, sliding doors, or TV lifts. Take advantage of the potential of Häfele Loox5. Create furniture that can do more than simply look good.

The chapter structure of the Loox brochure simplifies the ordering process by using this simple planning process.

Take advantage of the potential of Häfele Loox5 and create furniture that can do more than simply look good.



Switching.

Plan switch requirements and switch positions. Simple mechanical switches or convenient sensors and dimmers can be grouped together by means of multi driver or multi switch boxes to conveniently operate lights from a single location or from different locations.



Networking.

The Häfele Connect Mesh 6-way distributor is the central element for controlling monochrome lights, multi-white lights, or RGB lights individually or jointly. 6-way distributors can be networked. They can be controlled by remote control, wall-mounted push button, or app.



Distributing.

Plan the concealed cable routing and provide holes, grooves, or panels. An extensive range of extension leads and distributors facilitates suitable cabling of your project.




Supplying.

Add up the wattage of all lights and other devices.

If necessary, take into account possible later expansions and select a driver of the appropriate performance class. Lights of the same voltage type or current may be connected to a common driver. Converters are also available and are necessary if lights with different voltage types and currents will share a driver.

Choose a distributor for your current needs (with or without switching function or with Häfele Connect Mesh). The distributor can be easily replaced at a later time. Therefore, make sure the drivers are accessible in the furniture.

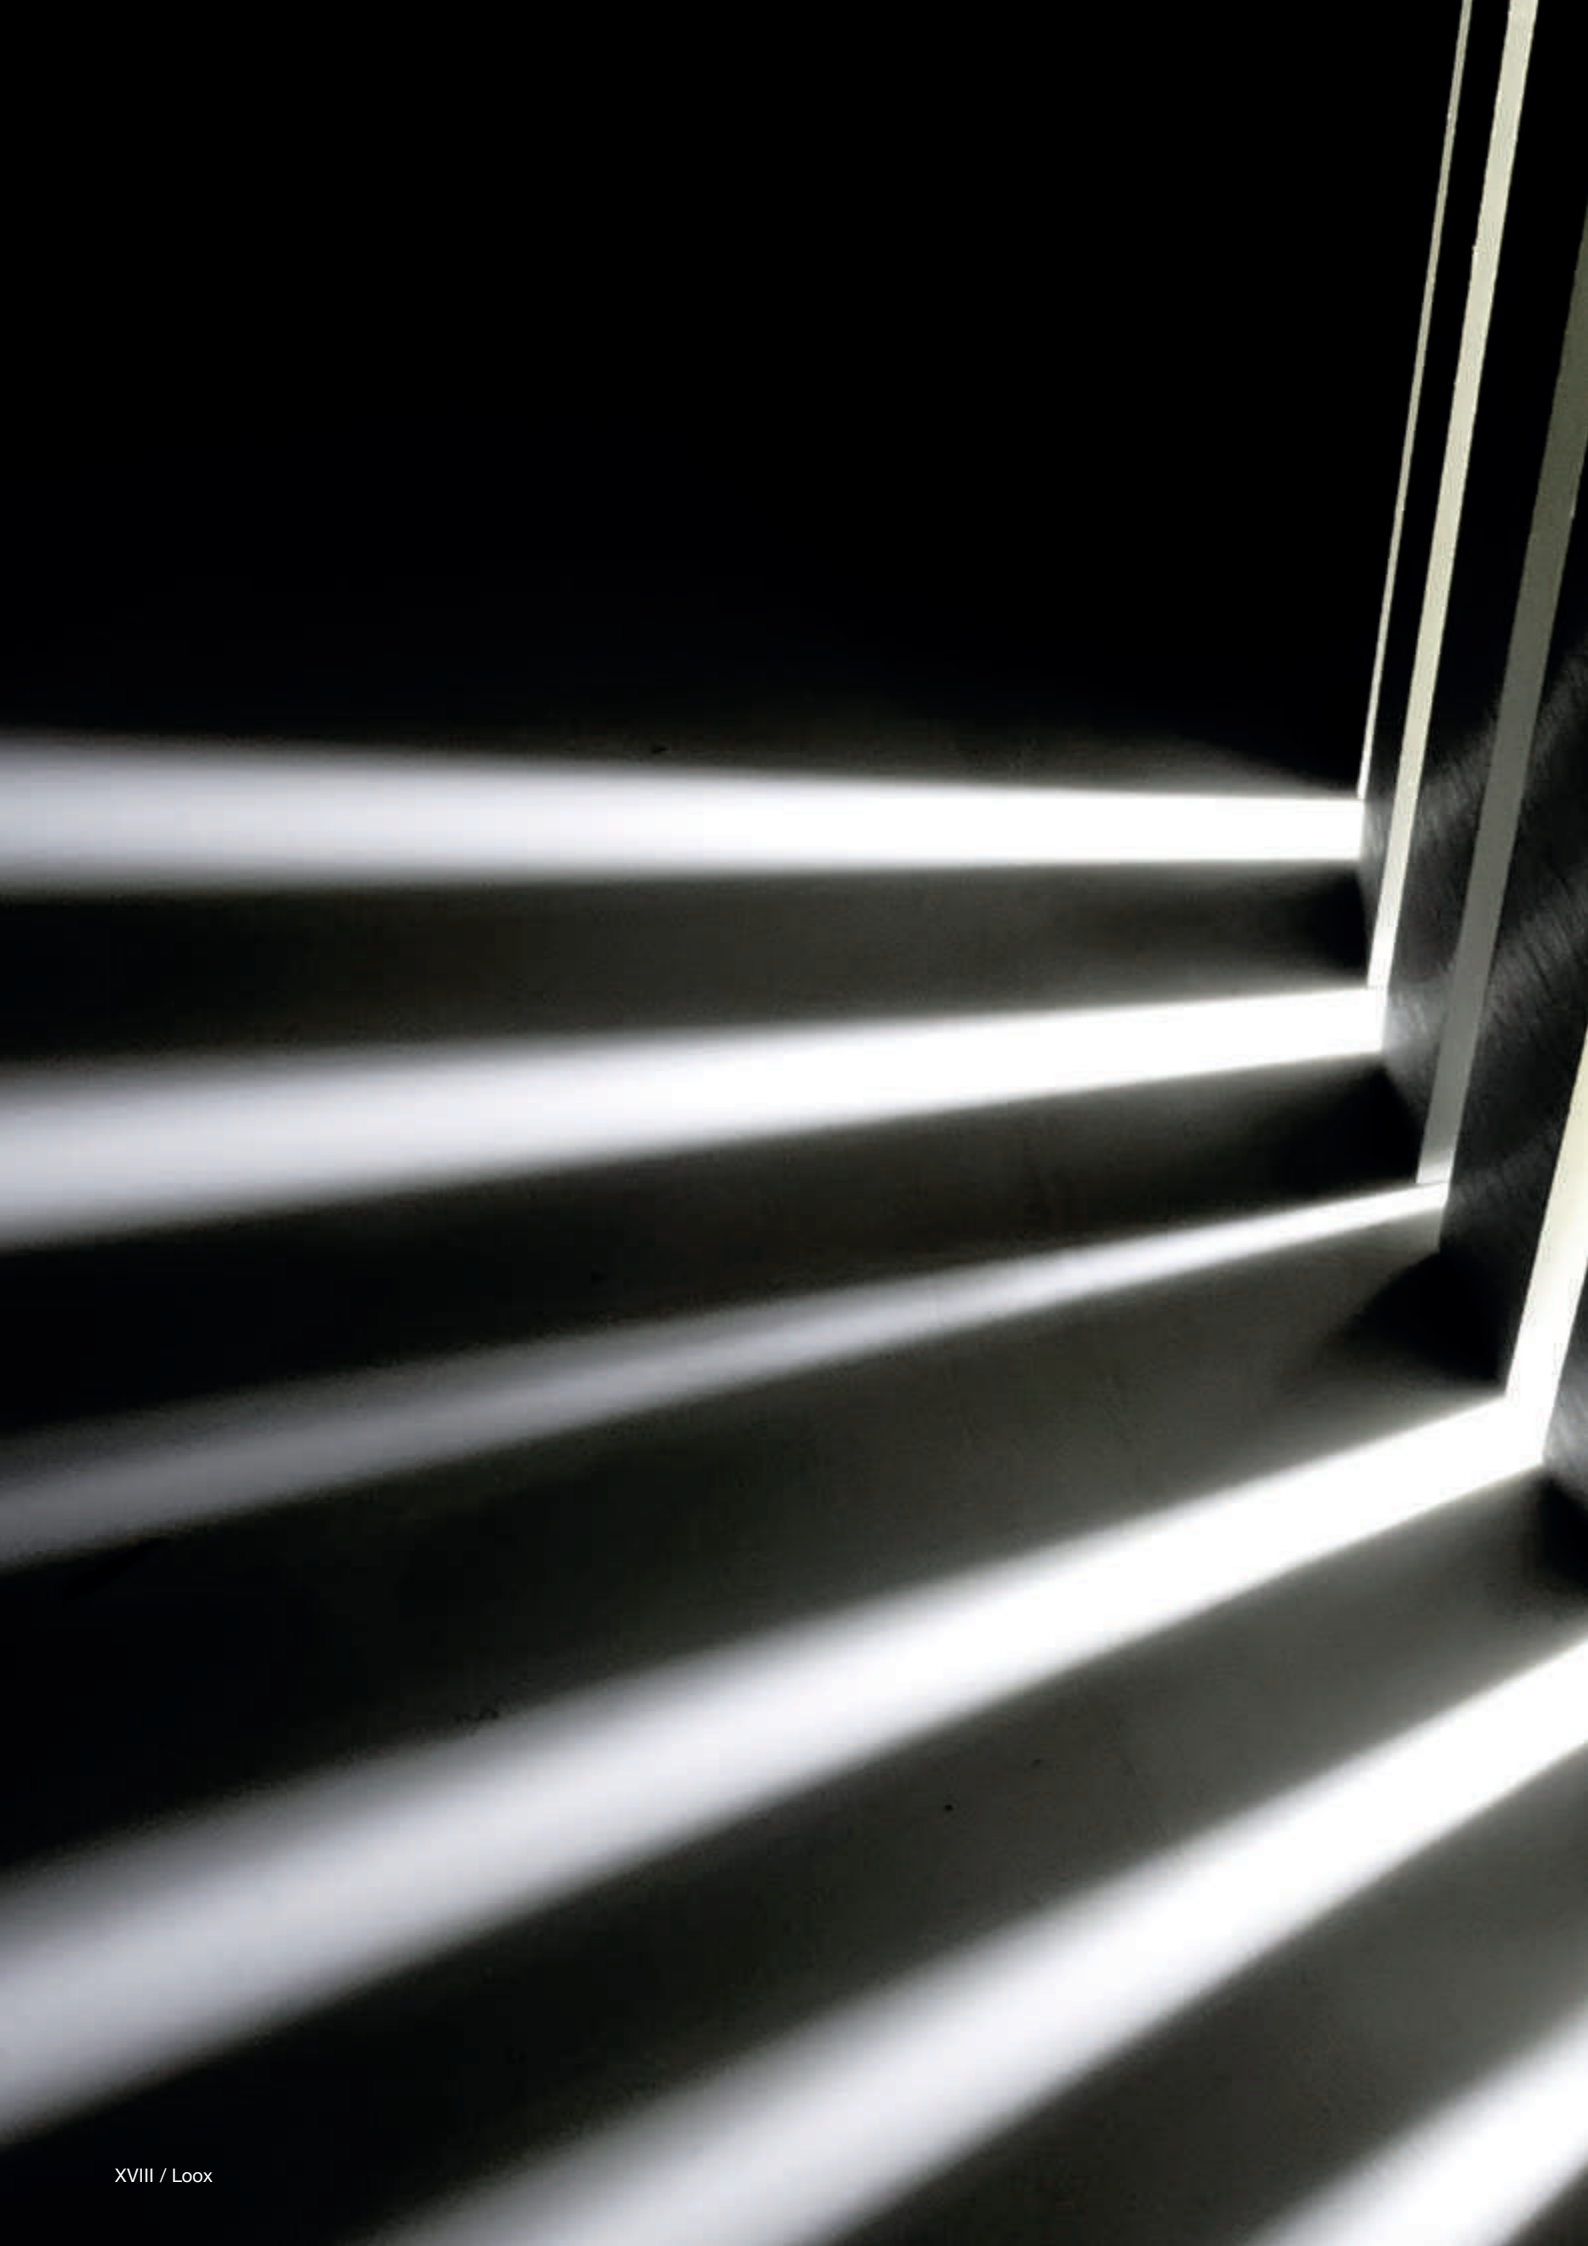



LOX5

Linear light



Task light Illuminate work spaces with > 500 lx at a distance of 500 mm

						Illuminance max. at a distance of 500 mm lx
LED 3052	24 V	Constant current	8 mm	19.2 W/m	1840	> Page 12
LED 3051	24 V	Constant current	8 mm	14.4 W/m	1400	> Page 12
LED 3048	24 V		8 mm	14.4 W/m	1320	> Page 10
LED 3050	24 V	Constant current	8 mm	9.6 W/m	1010	> Page 12
LED 2068	12 V		8 mm	9.6 W/m	955	> Page 10
LED 3045	24 V		8 mm	9.6 W/m	955	> Page 10
LED 2061	12 V		5 mm	9.6 W/m	860	> Page 8
LED 3041	24 V		5 mm	9.6 W/m	860	> Page 8
LED 3046	24 V	Silicone sleeve	8 mm	9.6 W/m	860	> Page 14
LED 2077	12 V	Constant current	8 mm	9.6 W/m	830	> Page 12



08



Ambient light 150–500 lx at a distance of 500 mm

						Illuminance max. at a distance of 500 mm lx
LED 2062	12 V		8 mm	4.8 W/m	470	> Page 10
LED 2065	12 V		8 mm	4.8 W/m	470	> Page 10
LED 3042	24 V		8 mm	4.8 W/m	470	> Page 10
LED 2060	12 V		5 mm	4.8 W/m	430	> Page 8
LED 3040	24 V		5 mm	4.8 W/m	430	> Page 8
LED 2063	12 V	Silicone sleeve	8 mm	4.8 W/m	425	> Page 14
LED 3043	24 V	Silicone sleeve	8 mm	4.8 W/m	425	> Page 14
LED 2032	12 V	Surface mounted light		3.0 W	258	> Page 36



08



Accent light <150 lx at a distance of 500 mm

LED 2019	12 V	Glass edge light		0.2 W		> Page 33
LED 9005	Battery-operated light	Drawer light		0.6 W		> Page 37



33



Multi-white lights

						Illuminance max. at a distance of 500 mm lx
LED 3049	24 V		8 mm	14.4 W/m	1200	> Page 16
LED 2070	12 V		8 mm	9.6 W/m	865	> Page 16
LED 3047	24 V		8 mm	9.6 W/m	865	> Page 16
LED 2064	12 V		8 mm	4.8 W/m	445	> Page 16
LED 3044	24 V		8 mm	4.8 W/m	445	> Page 16




16



RGB lights

LED 2080	12 V		10 mm	9.6 W/m		> Page 18
LED 3080	24 V		10 mm	9.6 W/m		> Page 18

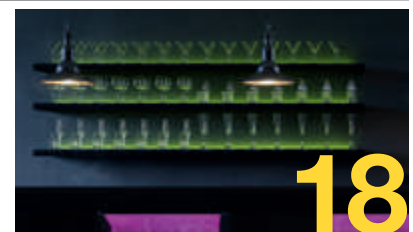


18



Aluminium profiles for recess mounting

Model	Internal dimension		
1104	8 mm	For strip lights up to a width of 5 mm	> Page 20
1103	11 mm		> Page 20
1105	11 mm	Asymmetrical light distribution	> Page 21
	16 mm		> Page 22
1107	8 mm	Asymmetric light distribution, for strip lights up to a width of 5 mm	> Page 23
1106	11 mm	Asymmetrical light distribution	> Page 23

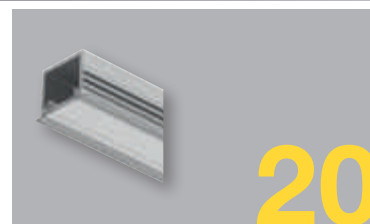

20

Plastic profiles for recess mounting

1102	5 mm		> Page 34
1101	8 mm		> Page 34



34

Aluminium profiles for recess mounting

2101, 2102	11 mm		> Page 24
2103	11 mm	With concealed fixing	> Page 26
2104	11 mm	With concealed fixing, asymmetric light distribution	> Page 26
	16 mm		> Page 28
	16 mm	With attached diffuser housing	> Page 29
	13 mm	Asymmetrical light distribution	> Page 30
	14 mm	Corner mounting	> Page 30
	14 mm	Drawer profile	> Page 31



24

Surface mounted aluminium profiles

16 mm	Mounting arm, swivelling for profile for recess mounting, with attached diffuser housing	> Page 29
-------	--	-----------



29

Aluminium wardrobe rail

15 mm	Asymmetrical light distribution	> Page 32
-------	---------------------------------	-----------



32

Plastic glass edge profile

11 mm		> Page 32
-------	--	-----------



32

Aluminium cooling strip

10 mm		> Page 35
-------	--	-----------



35

Diffusers

For profiles for recess mounting 1103-1107	> Page 35
For profiles for recess mounting 2101-2104	
For Loox profiles with 16 mm internal dimension	> Page 35








35

Point light



Task light



Illuminate work spaces with > 500 lx at a distance of 500 mm

	LED 2025	12 V	Recess mounted/ surface mounted	Drill hole Ø 58 mm	3.8 W	> Page 38
	LED 3022	24 V	Recess mounted	Drill hole Ø 180 mm	4.8 W	> Page 68
	LED 3023	24 V	Surface mounted	Ø 180 mm	4.8 W	> Page 69
	LED 3024	24 V	Recess mounted	210 x 210 mm	5.8 W	> Page 70
	LED 3025	24 V	Surface mounted	205 x 205 mm	5.8 W	> Page 71



Spotlighting (higher intensity than task lights with very narrow beam angle)















Highlight objects with >500 lx at a distance of 500 mm


	LED 4013	350 mA	Surface mounted	44 x 33 mm corner mounting	1.0 W	> Page 76
	LED 4011	350 mA	Surface mounted	Spotlight, post light	1.0 W	> Page 77



Ambient light



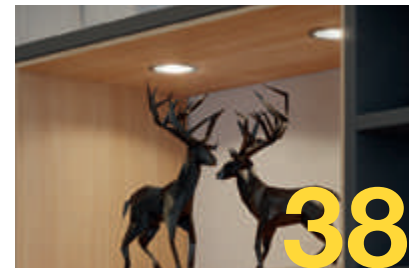


Stage furnishings with 150–500 lx at a distance of 500 mm


	LED 2092	12 V	Recess mounted/ surface mounted	Drill hole Ø 58 mm	3.4 W	> Page 38
	LED 3092	24 V				
	LED 2040	12 V	Recess mounted/ surface mounted	Drill hole Ø 35 mm	3.4 W	> Page 42
	LED 2090	12 V	Recess mounted/ surface mounted	Drill hole Ø 26 mm	1.2 W	> Page 44
	LED 3090	24 V				
	LED 2047	12 V	Recess mounted/ surface mounted	Drill hole Ø 55 mm	3.0 W	> Page 46
	LED 3038	24 V				
	LED 2020	12 V	Recess mounted/ surface mounted	Drill hole Ø 55 mm	3.2 W	> Page 50
	LED 2022	12 V	Recess mounted/ surface mounted	Drill hole Ø 26 mm	1.5 W	> Page 52
	LED 2023	12 V	Recess mounted/ surface mounted	Drill hole Ø 26 mm	1.5 W	> Page 54
	LED 2039	12 V	Recess mounted	Ø 58 mm	2.5 W	> Page 56
	LED 2027	12 V	Recess mounted	Drill hole Ø 65 mm	2.6 W	> Page 60
	LED 2050	12 V	Surface mounted	Ø 65 mm	2.5 W	> Page 58
	LED 2051	12 V	Surface mounted	65 x 65 mm	2.5 W	> Page 59








Ambient light

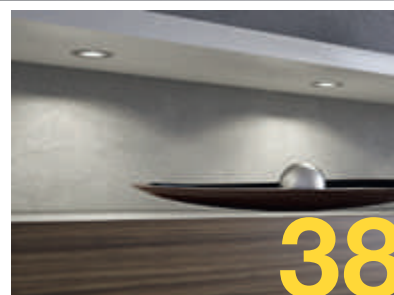
	LED 2033	12 V	Surface mounted	65 x 118 mm	3.8 W	> Page 61
	LED 3010	24 V	Recess mounted/ surface mounted	Drill hole Ø 60 mm	3.3 W	> Page 66
	LED 3035	24 V	Surface mounted	Ø 65 mm	2.5 W	> Page 72
	LED 3036	24 V	Surface mounted	65 x 65 mm	2.5 W	> Page 73
	LED 4009	350 mA	Recess mounted/ surface mounted	Drill hole Ø 55 mm	3.9 W	> Page 74







Accent light

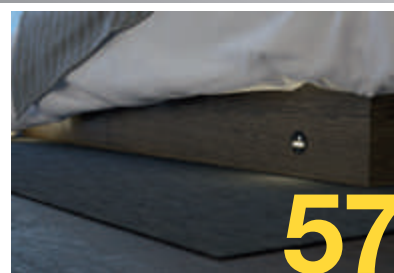
Illuminate non-hazardous traffic areas and corridors or storage spaces with <math>< 150 \text{ lx}</math> at a distance of 500 mm

	LED 2028	12 V	Recess mounted	Drill hole Ø 54 mm	0.3 W	> Page 57
	LED 9003	Battery-operated light	Surface mounted	Ø 100 mm	0.6 W	> Page 80
	LED 9004	Battery-operated light	Surface mounted	120 x 65 mm	0.8 W	> Page 81





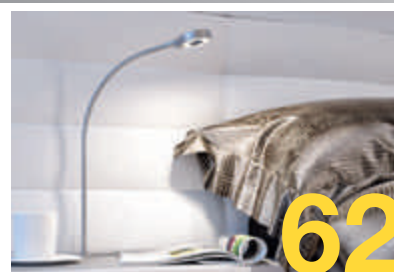

Flexible surface mounted lights

	LED 2034	12 V	Surface mounted, with charging station	1.5 W	> Page 62
	LED 2035	12 V	Surface mounted	1.5 W	> Page 63
	LED 2018	12 V	Surface mounted	2.0 W	> Page 64
	LED 3018	24 V	Surface mounted	2.8 W	> Page 65






Multi-white lights

	LED 2091	12 V	Recess mounted/ surface mounted	Drill hole Ø 58 mm	3.4 W	> Page 40
	LED 3091	24 V				
	LED 2048	12 V	Recess mounted/ surface mounted	Drill hole Ø 26 mm	3.0 W	> Page 48
	LED 3039	24 V				



RGB lights

	LED 2081	12 V	Surface mounted	65 x 65 mm	0.7 W	> Page 78
	LED 3081	24 V				

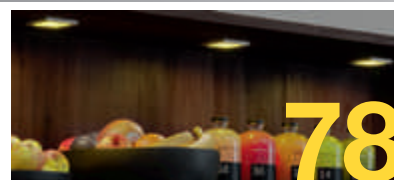





Linear light

For universal use in furniture.




Good reasons.

- > Continuous light line with homogeneous light distribution
- > Minimalistic design
- > Virtually invisible, glare-free light source
- > Easy installation

For every situation.

- > Radiant task light for work spaces
- > Discreet ambient light for wellness zones
- > Splash-proof silicone strip lights for bathroom applications
- > Plastic profiles for vertical illumination in storage spaces
- > Aluminium profiles in trendy colours for top-of-the-line design demands

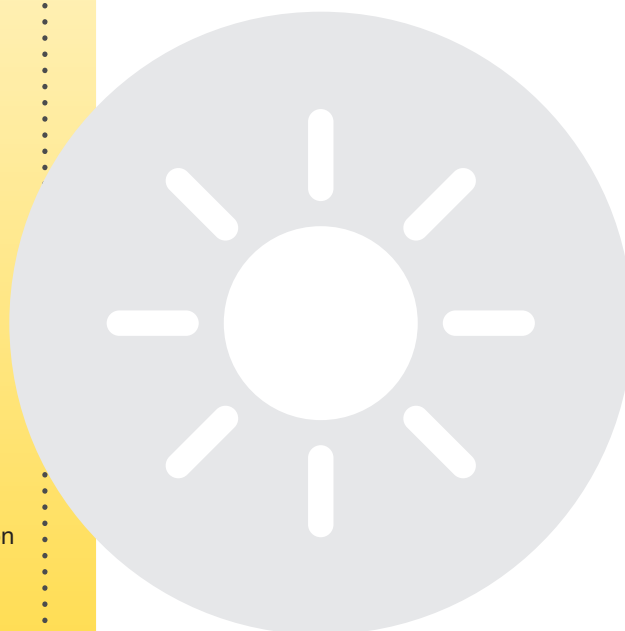

LED strip lights


Monochrome, 5 mm



Häfele Loox5 LED 2060/2061/3040/3041



LED 2060/2061



LED 3040/3041

EXTRA NARROW 5 mm

Illuminance value in lx applies to 1 m strip length:

2700 K				3000 K				4000 K				5000 K				120°		
940 lx				970 lx				1000 lx				1030 lx				☀️		250 mm
400 lx				420 lx				430 lx				430 lx				☀️		500 mm
220 lx				235 lx				240 lx				240 lx				☀️		750 mm
135 lx				145 lx				145 lx				145 lx				☀️		1000 mm

LED 2060/3040

2700 K				3000 K				4000 K				5000 K				120°		
1860 lx				1960 lx				2000 lx				2060 lx				☀️		250 mm
790 lx				850 lx				860 lx				860 lx				☀️		500 mm
440 lx				470 lx				480 lx				480 lx				☀️		750 mm
270 lx				290 lx				290 lx				290 lx				☀️		1000 mm


LED 2061/3041

Equipped with high-quality Samsung LEDs

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: 5 mm
- > Height: 1.3 mm
- > Life time L80/B10: >50,000 h
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

❗ Order reference:
Please order lead separately.

➡ Aluminium profile recommended from 9.6 W/m, see page 20

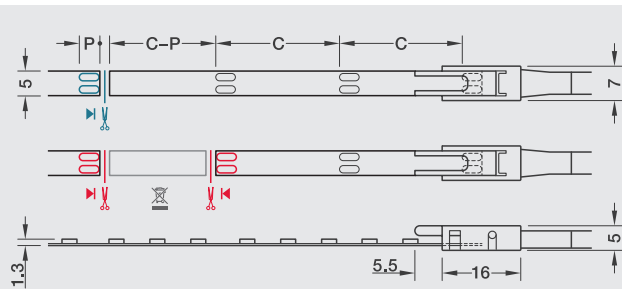

- Cut LED strip light to length (one contact side remains on the remainder piece; reusable)
- Connect LED strip lights (two contact sides required)

C = section length
P = length of contact surface


🔌 **5 12V** Loox5 12 V driver see page 121

🔌 **5 24V** Loox5 24 V driver see page 122

Häfele Loox5 LED 2060/2061/3040/3041

Voltage V	Quantity LEDs/m	Colour temperature K	Wattage W/m	Luminous flux lm/m	Luminous efficacy lm/W	Colour rendering index CRI		Weight. energy consumpt. per m in kWh/1000 h	Section length C mm	Length of contact surface P mm	Max. strip length (visual) m	Available length		
						R _a	R ₉					5 m	15 m	
5 12V	Häfele Loox5 LED 2060													
	120	2700	4.8	440	92	>90	>50	5.28	25	3	4.0	833.74.320	833.74.324	
		3000	4.8	460	96	>90	>50	5.28	25	3	4.0	833.74.321	833.74.325	
		4000	4.8	480	100	>90	>50	5.28	25	3	4.0	833.74.322	833.74.326	
		5000	4.8	495	103	>90	>50	5.28	25	3	4.0	833.74.323	833.74.327	
	Häfele Loox5 LED 2061													
	120	2700	9.6	870	91	>90	>50	10.56	25	3	3.0	833.74.328	833.74.332	
		3000	9.6	930	97	>90	>50	10.56	25	3	3.0	833.74.329	833.74.333	
		4000	9.6	955	99	>90	>50	10.56	25	3	3.0	833.74.330	833.74.334	
		5000	9.6	990	103	>90	>50	10.56	25	3	3.0	833.74.331	833.74.335	
	5 24V	Häfele Loox5 LED 3040												
		120	2700	4.8	440	92	>90	>50	5.28	50	3	8.0	833.76.300	833.76.304
			3000	4.8	460	96	>90	>50	5.28	50	3	8.0	833.76.301	833.76.305
			4000	4.8	480	100	>90	>50	5.28	50	3	8.0	833.76.302	833.76.306
			5000	4.8	495	103	>90	>50	5.28	50	3	8.0	833.76.303	833.76.307
		Häfele Loox5 LED 3041												
120		2700	9.6	870	91	>90	>50	10.56	50	3	5.5	833.76.308	833.76.312	
		3000	9.6	930	97	>90	>50	10.56	50	3	5.5	833.76.309	833.76.313	
		4000	9.6	955	99	>90	>50	10.56	50	3	5.5	833.76.310	833.76.314	
		5000	9.6	990	103	>90	>50	10.56	50	3	5.5	833.76.311	833.76.315	

! Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Maximum wattage-dependent strip length on the driver, see page 126.




> 3.5 A/20 AWG lead
for LED strip light 5 mm

Voltage	Length mm	Cat. No.
5 12V	2000	833.95.705
5 24V	2000	833.95.711



> 3.5 A clip connector
for 5 mm LED strip light

	Cat. No.
Clip connector	833.89.207



> 3.5 A/20 AWG interconnecting lead
for 5 mm LED strip light

Length mm	Cat. No.
50	833.89.194
500	833.89.195
2000	833.89.196



> Corner connector, 90° rigid, 3.5 A
for left or right for 5 mm LED strip light

	Cat. No.
Corner connector rigid	833.89.190

LED strip lights

Monochrome, 8 mm



Häfele Loox5 LED 2062/2065/2068/3042/3045/3048



LED 2062



LED 2065/2068



LED 3042/3045/3048

Equipped with high-quality Samsung LEDs

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: 8 mm
- > Height: 1.3 mm
- > Life time L80/B10: >50,000 h
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

Illuminance value in lx applies to 1 m strip length:

2700 K				3000 K				4000 K				5000 K				120°	
1050 lx				1090 lx				1120 lx				1130 lx				☀	
435 lx				455 lx				460 lx				470 lx				☀	
240 lx				245 lx				260 lx				260 lx				☀	
145 lx				150 lx				155 lx				160 lx				☀	

LED 2062/2065/3042

2700 K				3000 K				4000 K				5000 K				120°	
2145 lx				2250 lx				2300 lx				2300 lx				☀	
900 lx				940 lx				950 lx				955 lx				☀	
480 lx				505 lx				510 lx				515 lx				☀	
300 lx				310 lx				320 lx				320 lx				☀	


LED 2068/3045

2700 K				3000 K				4000 K				5000 K				120°	
2870 lx				3000 lx				3100 lx				3100 lx				☀	
1210 lx				1270 lx				1310 lx				1320 lx				☀	
665 lx				695 lx				715 lx				715 lx				☀	
415 lx				430 lx				445 lx				450 lx				☀	

LED 3048

❗ Order reference:
Please order lead separately.

➡ Aluminium profile recommended from 9.6 W/m, see page 20

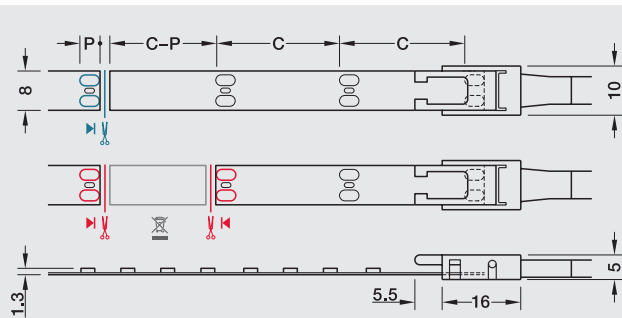

— Cut LED strip light to length
(one contact side remains on the remainder piece; reusable)

— Connect LED strip lights
(two contact sides required)

C = section length
P = length of contact surface


⚡ 5 12V Loox5 12 V driver see page 121

⚡ 5 24V Loox5 24 V driver see page 122

❗ Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%. Maximum wattage-dependent strip length on the driver, see page 126.

Häfele Loox5 LED 2062/2065/2068/3042/3045/3048

Voltage V	Quantity LEDs/m	Colour temperature K	Wattage W/m	Luminous flux lm/m	Luminous efficacy lm/W	Colour rendering index CRI		Weight. energy consumpt. per m in kWh/1000 h	Section length C mm	Length of contact surface P mm	Max. strip length (visual) m	Available length	
						R _a	R ₉					5 m	50 m
5_{12V}	Häfele Loox5 LED 2062												
	60	2700	4.8	440	92	>90	>50	5.28	50	4	6.0	833.74.336	833.74.340
		3000	4.8	465	97	>90	>50	5.28	50	4	6.0	833.74.337	833.74.341
		4000	4.8	490	102	>90	>50	5.28	50	4	6.0	833.74.338	833.74.342
		5000	4.8	495	103	>90	>50	5.28	50	4	6.0	833.74.339	833.74.343
	Häfele Loox5 LED 2065												
	120	2700	4.8	440	92	>90	>50	5.28	25	4	6.0	833.74.354	833.74.358
		3000	4.8	465	97	>90	>50	5.28	25	4	6.0	833.74.355	833.74.359
		4000	4.8	490	102	>90	>50	5.28	25	4	6.0	833.74.356	833.74.360
		5000	4.8	495	103	>90	>50	5.28	25	4	6.0	833.74.357	833.74.361
	Häfele Loox5 LED 2068												
	120	2700	9.6	920	96	>90	>50	10.56	25	4	4.0	833.74.362	833.74.366
3000		9.6	970	101	>90	>50	10.56	25	4	4.0	833.74.363	833.74.367	
4000		9.6	1000	104	>90	>50	10.56	25	4	4.0	833.74.364	833.74.368	
5000		9.6	1040	108	>90	>50	10.56	25	4	4.0	833.74.365	833.74.369	
5_{24V}	Häfele Loox5 LED 3042												
	120	2700	4.8	440	92	>90	>50	5.28	50	4	12.0	833.76.316	833.76.320
		3000	4.8	465	97	>90	>50	5.28	50	4	12.0	833.76.317	833.76.321
		4000	4.8	490	102	>90	>50	5.28	50	4	12.0	833.76.318	833.76.322
		5000	4.8	495	103	>90	>50	5.28	50	4	12.0	833.76.319	833.76.323
	Häfele Loox5 LED 3045												
	120	2700	9.6	920	96	>90	>50	10.56	50	4	8.0	833.76.334	833.76.338
		3000	9.6	970	101	>90	>50	10.56	50	4	8.0	833.76.335	833.76.339
		4000	9.6	1000	104	>90	>50	10.56	50	4	8.0	833.76.336	833.76.340
		5000	9.6	1040	108	>90	>50	10.56	50	4	8.0	833.76.337	833.76.341
	Häfele Loox5 LED 3048												
	120	2700	14.4	1270	88	>90	>50	15.84	50	4	6.2	833.76.352	833.76.356
3000		14.4	1305	91	>90	>50	15.84	50	4	6.2	833.76.353	833.76.357	
4000		14.4	1340	93	>90	>50	15.84	50	4	6.2	833.76.354	833.76.358	
5000		14.4	1430	99	>90	>50	15.84	50	4	6.2	833.76.355	833.76.359	




> 5 A/18 AWG lead
for LED strip light 8 mm

Voltage	Length mm	Cat. No.
5_{12V}	100	833.93.736
	500	833.95.701
	2000	833.95.700
5_{24V}	100	833.75.743
	500	833.95.707
	2000	833.95.706



> 5 A clip connector
for 8 mm LED strip light

	Cat. No.
Clip connector	833.89.206



> 5 A/18 AWG interconnecting lead
for 8 mm LED strip light

Length mm	Cat. No.
50	833.89.191
500	833.89.192
2000	833.89.193



> Corner connector, 90° rigid, 5 A
for left or right for 8 mm LED strip light

	Cat. No.
Corner connector rigid	833.89.187

LED strip lights

Monochrome, constant current, 8 mm



Häfele Loox5 LED 2077 / 3050 / 3051 / 3052



LED 2077



LED 3050/3051/3052

Illuminance value in lx applies to 1 m strip length:

2700 K	3000 K	4000 K	5000 K	120°	
1775 lx	1850 lx	1950 lx	1950 lx		250 mm
760 lx	790 lx	830 lx	830 lx		500 mm
425 lx	440 lx	465 lx	465 lx		750 mm
265 lx	270 lx	285 lx	285 lx		1000 mm

LED 2077

2700 K	3000 K	4000 K	5000 K	120°	
2050 lx	2150 lx	2205 lx	2340 lx		250 mm
890 lx	930 lx	990 lx	1010 lx		500 mm
490 lx	520 lx	545 lx	550 lx		750 mm
305 lx	325 lx	335 lx	340 lx		1000 mm

LED 3050

2700 K	3000 K	4000 K	5000 K	120°	
3150 lx	3170 lx	3190 lx	3200 lx		250 mm
1365 lx	1385 lx	1390 lx	1400 lx		500 mm
760 lx	770 lx	770 lx	770 lx		750 mm
470 lx	480 lx	480 lx	480 lx		1000 mm

LED 3051

2700 K	3000 K	4000 K	5000 K	120°	
4070 lx	4160 lx	4220 lx	4260 lx		250 mm
1750 lx	1780 lx	1800 lx	1840 lx		500 mm
970 lx	990 lx	1000 lx	1020 lx		750 mm
600 lx	620 lx	625 lx	630 lx		1000 mm

LED 3052

Constant current technology


- > Achieves uniform brightness over the entire strip light length
- > Increased life time, higher visual strip length, higher luminous efficacy

Equipped with high-quality Samsung LEDs

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: 8 mm
- > Height: 1.5 mm
- > Life time L80/B10: >70,000 h
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

Order reference:
Please order lead separately.

Aluminium profile recommended from 9.6 W/m, see page 20

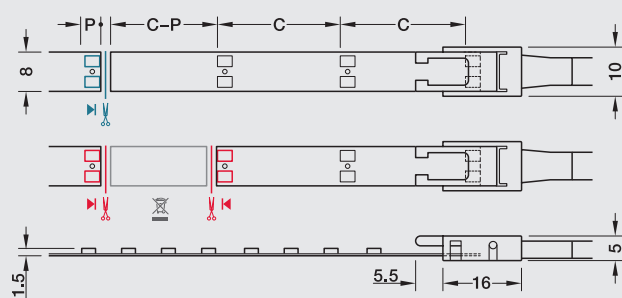

- Cut LED strip light to length
(one contact side remains on the remainder piece; reusable)
- Connect LED strip lights
(two contact sides required)

C = section length
P = length of contact surface


Loox5 12 V driver see page 121

Loox5 24 V driver see page 122

Häfele Loox5 LED 2077 / 3050 / 3051 / 3052

Voltage V	Quantity LEDs/m	Colour temperature K	Wattage W/m	Luminous flux lm/m	Luminous efficacy lm/W	Colour rendering index CRI		Weight. energy consumpt. per m in kWh/1000 h	Section length C mm	Length of contact surface P mm	Max. strip length (visual) m	Available length	
						R _a	R ₉					5 m	50 m
5^{12V}	Häfele Loox5 LED 2077												
	120	2700	9.6	810	84	>90	>50	10.56	25	4	6.2	833.74.372	833.74.376
		3000	9.6	860	90	>90	>50	10.56	25	4	6.2	833.74.373	833.74.377
		4000	9.6	900	94	>90	>50	10.56	25	4	6.2	833.74.374	833.74.378
		5000	9.6	905	94	>90	>50	10.56	25	4	6.2	833.74.375	833.74.379
Häfele Loox5 LED 3050													
5^{24V}	140	2700	9.6	945	98	>90	>50	10.56	50	3	9.0	833.76.362	833.76.366
		3000	9.6	1030	107	>90	>50	10.56	50	3	9.0	833.76.363	833.76.367
		4000	9.6	1060	110	>90	>50	10.56	50	3	9.0	833.76.364	833.76.368
		5000	9.6	1080	113	>90	>50	10.56	50	3	9.0	833.76.365	833.76.369
Häfele Loox5 LED 3051													
140	2700	14.4	1430	99	>90	>50	15.84	50	3	6.2	833.76.370	833.76.374	
	3000	14.4	1520	106	>90	>50	15.84	50	3	6.2	833.76.371	833.76.375	
	4000	14.4	1605	111	>90	>50	15.84	50	3	6.2	833.76.372	833.76.376	
	5000	14.4	1650	115	>90	>50	15.84	50	3	6.2	833.76.373	833.76.377	
Häfele Loox5 LED 3052													
140	2700	19.2	1850	96	>90	>50	21.12	50	3	4.6	833.76.378	833.76.382	
	3000	19.2	2015	105	>90	>50	21.12	50	3	4.6	833.76.379	833.76.383	
	4000	19.2	2050	107	>90	>50	21.12	50	3	4.6	833.76.380	833.76.384	
	5000	19.2	2100	109	>90	>50	21.12	50	3	4.6	833.76.381	833.76.385	

! The maximum visual strip length for Loox5 constant current strips is the length without drop in luminous flux. Maximum wattage-dependent strip length on the driver, see page 128.




> 5 A/18 AWG lead for LED strip light 8 mm

Voltage	Length mm	Cat. No.
5^{12V}	100	833.93.736
	500	833.95.701
	2000	833.95.700
5^{24V}	100	833.75.743
	500	833.95.707
	2000	833.95.706




> 5 A clip connector for 8 mm LED strip light

	Cat. No.
Clip connector	833.89.206



> 5 A/18 AWG interconnecting lead for 8 mm LED strip light

Length mm	Cat. No.
50	833.89.191
500	833.89.192
2000	833.89.193



> Corner connector, 90° rigid, 5 A for left or right for 8 mm LED strip light

	Cat. No.
Corner connector rigid	833.89.187

LED silicone strip lights

Monochrome, 8 mm



Häfele Loox5 LED 2063 / 3043 / 3046



LED 2063



LED 3043/3046

Equipped with high-quality Samsung LEDs

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: Strip: 8 mm, silicone sleeve: 10 mm
- > Height: Strip: 1.3 mm, silicone sleeve: 4.8 mm
- > Life time L80/B10: >50,000 h
- > Energy efficiency class: A+
- > Degree of protection: IP44 / IP20 optional
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

Illuminance value in lx applies to 1 m strip length:


2700 K	3000 K	4000 K	5000 K	120°	
920 lx	960 lx	975 lx	1010 lx		250 mm
390 lx	410 lx	415 lx	425 lx		500 mm
215 lx	225 lx	230 lx	235 lx		750 mm
135 lx	140 lx	145 lx	145 lx		1000 mm

LED 2063 / 3043

2700 K	3000 K	4000 K	5000 K	120°	
1855 lx	1895 lx	1960 lx	2020 lx		250 mm
790 lx	805 lx	840 lx	860 lx		500 mm
435 lx	445 lx	465 lx	475 lx		750 mm
270 lx	275 lx	290 lx	295 lx		1000 mm

LED 3046

Order reference:
Please order lead separately.

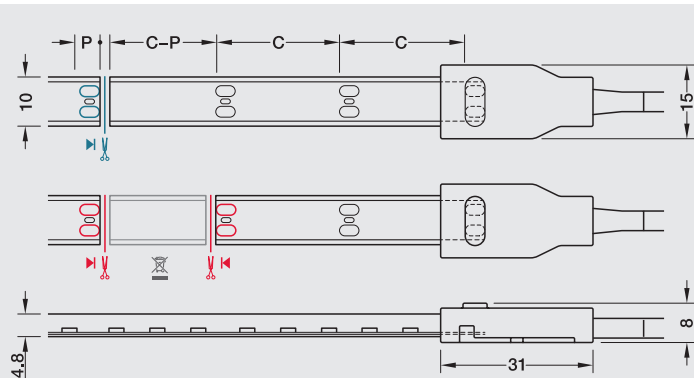

- Cut LED strip light to length (one contact side remains on the remainder piece; reusable)
- Connect LED strip lights (two contact sides required)

C = section length
P = length of contact surface

Loox5 12 V driver see page 121

Loox5 24 V driver see page 122

Minimal colour deviations due to silicone sleeve:

Colour temperature of the LED	Colour deviation
2700 K	-30 K
3000 K	-40 K
4000 K	-50 K
5000 K	-80 K

Häfele Loox5 LED 2063/3043/3046


Voltage	Quantity	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI		Weight. energy consumpt. per m in kWh/1000 h	Section length C	Length of contact surface P	Max. strip length (visual)	Available length	
						R _a	R ₉					5 m	15 m
5^{12V}	Häfele Loox5 LED 2063												
	60	2700	4.8	415	86	>90	>50	5.28	50	4	6.0	833.74.344	833.74.348
		3000	4.8	440	92	>90	>50	5.28	50	4	6.0	833.74.345	833.74.349
		4000	4.8	455	95	>90	>50	5.28	50	4	6.0	833.74.346	833.74.350
5000		4.8	460	96	>90	>50	5.28	50	4	6.0	833.74.347	833.74.351	
5^{24V}	Häfele Loox5 LED 3043												
	120	2700	4.8	415	86	>90	>50	5.28	50	4	12.0	833.76.324	833.76.328
		3000	4.8	440	92	>90	>50	5.28	50	4	12.0	833.76.325	833.76.329
		4000	4.8	455	95	>90	>50	5.28	50	4	12.0	833.76.326	833.76.330
		5000	4.8	460	96	>90	>50	5.28	50	4	12.0	833.76.327	833.76.331
	Häfele Loox5 LED 3046												
	120	2700	9.6	820	85	>90	>50	10.56	50	4	8.0	833.76.342	833.76.346
		3000	9.6	870	91	>90	>50	10.56	50	4	8.0	833.76.343	833.76.347
		4000	9.6	900	94	>90	>50	10.56	50	4	8.0	833.76.344	833.76.348
		5000	9.6	930	97	>90	>50	10.56	50	4	8.0	833.76.345	833.76.349



Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Maximum wattage-dependent strip length on the driver, see page 128.



Degree of protection IP44



> 5 A/18 AWG lead for 8 mm LED silicone strip light


Voltage	Length mm	Cat. No.
5^{12V}	2000	833.95.703
5^{24V}	2000	833.95.709



> End cap set with adhesive for 8 mm LED silicone strip light

For sealing the shortened silicone sleeve; achieves degree of protection IP44

	Cat. No.
Set of 5, with 5 ml adhesive	833.89.184





> 5 A/18 AWG interconnecting lead for 8 mm LED silicone strip light

Length mm	Cat. No.
50	833.89.203
500	833.89.204
2000	833.89.205



Degree of protection IP20

If necessary, you can realise an IP20 version using leads, interconnecting leads and clip connectors for 8 mm mono-chrome LED strip lights, see Accessories page 11.



LED strip lights

Multi-white, 8 mm



Häfele Loox5 LED 2064 / 2070 / 3044 / 3047 / 3049



LED 2064



LED 2070



LED 3044 / 3047 / 3049

Optimised light mixture

- > Cool white and warm white LEDs in the smallest of spaces
- > Optimal light mixture without flickering

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: 8 mm
- > Height: 1.3 mm
- > Life time L80/B10: >50,000 h
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

Illuminance value in lx applies to 1 m strip length:

2700 K	5000 K	120°	
1025 lx	1075 lx		250 mm
425 lx	445 lx		500 mm
230 lx	245 lx		750 mm
145 lx	150 lx		1000 mm

LED 2064 / 3044

2700 K	5000 K	120°	
1865 lx	2045 lx		250 mm
785 lx	865 lx		500 mm
430 lx	475 lx		750 mm
270 lx	295 lx		1000 mm


LED 2070 / 3047

2700 K	5000 K	120°	
2780 lx	2800 lx		250 mm
1180 lx	1200 lx		500 mm
650 lx	660 lx		750 mm
405 lx	415 lx		1000 mm

LED 3049

Order reference:
Please order lead separately.

Aluminium profile recommended from 9.6 W/m, see page 20

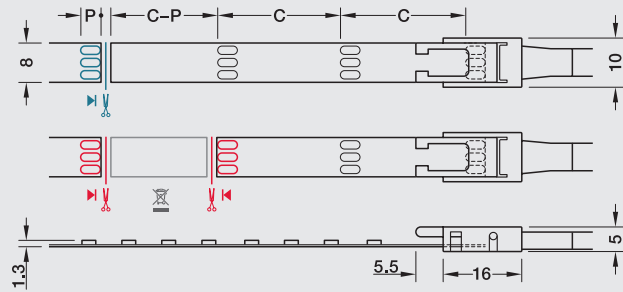

- Cut LED strip light to length (one contact side remains on the remainder piece; reusable)
- Connect LED strip lights (two contact sides required)

C = section length
P = length of contact surface

5 12V Loox5 12 V driver see page 121

5 24V Loox5 24 V driver see page 122


Colour control only via 6-way distributor Häfele Connect Mesh with multi-white adapter and remote control or smartphone. Please order separately, see chapter Networking, page 96.



Häfele Loox5 LED 2064 / 2070 / 3044 / 3047 / 3049

Voltage V	Quantity LEDs/m	Colour temperature K	Wattage W/m	Luminous flux lm/m	Luminous efficacy lm/W	Colour rendering index CRI		Weight. energy consumpt. per m in kWh/1000 h	Section length C mm	Length of contact surface P mm	Max. strip length (visual) m	Available length	
						R _a	R ₉					5 m	50 m
5_{12V}	Häfele Loox5 LED 2064												
	2 x 60	2700 5000	4.8	425 465	89 97	>90	>50	5.28	50	4	4.5	833.74.352	833.74.353
	Häfele Loox5 LED 2070												
	2 x 120	2700 5000	9.6	825 930	86 97	>90	>50	10.56	25	3.5	3.5	833.74.370	833.74.371
5_{24V}	Häfele Loox5 LED 3044												
	2 x 120	2700 5000	4.8	425 465	89 97	>90	>50	5.28	50	3.5	8.5	833.76.332	833.76.333
	Häfele Loox5 LED 3047												
	2 x 120	2700 5000	9.6	825 930	86 97	>90	>50	10.56	50	3.5	6.5	833.76.350	833.76.351
Häfele Loox5 LED 3049													
2 x 120	2700 5000	14.4	1230 1370	85 95	>90	>50	15.84	50	3.5	5.0	833.76.360	833.76.361	

! Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Maximum wattage-dependent strip length on the driver, see page 130.




> 3.5 A/20 AWG lead for 8 mm multi-white LED strip light

Voltage	Length mm	Cat. No.
5_{12V}	2000	833.95.702
5_{24V}	2000	833.95.708



> 3.5 A clip connector for 8 mm multi-white LED strip light

	Cat. No.
Clip connector	833.89.208



> 3.5 A/20 AWG interconnecting lead for 8 mm multi-white LED strip light

Length mm	Cat. No.
50	833.89.197
500	833.89.198
2000	833.89.199



> Corner connector 90° rigid, 3.5 A for left or right for 8 mm multi-white LED strip light

	Cat. No.
Corner connector rigid	833.89.188

LED strip lights

RGB, 10 mm



Häfele Loox5 LED 2080/3080




LED 2080/3080

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: 10 mm
- > Height: 2.4 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

! Order reference:
Please order lead separately.

➔ Aluminium profile recommended from 9.6 W/m, see page 20

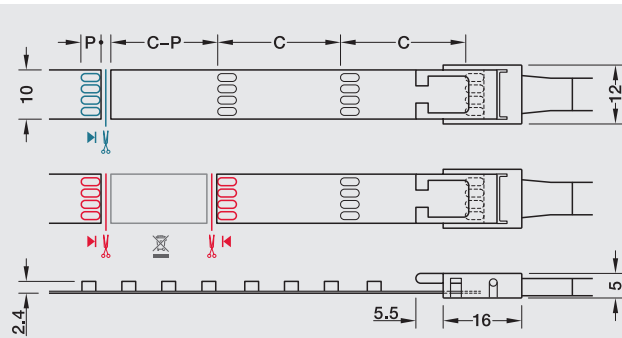

- Cut LED strip light to length
(one contact side remains on the remainder piece; reusable)
- Connect LED strip lights
(two contact sides required)

C = section length
P = length of contact surface

💡 **5 12 V** Loox5 12 V driver see page 121

💡 **5 24 V** Loox5 24 V driver see page 122

🔗 Colour control only via 6-way distributor Häfele Connect Mesh with RGB adapter and remote control or smartphone. Please order separately, see chapter Networking, page 96.




Häfele Loox5 LED 2080/3080

Voltage	Number of LEDs/m	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Weight. energy consumpt. per m in kWh/1000 h	Section length C	Length of contact surface P	Max. strip length (visual)	Delivery length
V	LEDs/m	K	W/m	lm/m	lm/W		mm	mm	m	5 m
5^{12V}	Häfele Loox5 LED 2080									
	120	RGB	9.6	530	51	10.78	25	3.8	3.0	833.74.380
5^{24V}	Häfele Loox5 LED 3080									
	120	RGB	9.6	530	51	10.78	50	3.8	6.5	833.76.386



Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Maximum wattage-dependent strip length on the driver, see page 130.




> 3.5 A/20 AWG lead
for LED RGB strip light, 10 mm

Voltage	Length mm	Cat. No.
5^{12V}	2000	833.95.704
5^{24V}	2000	833.95.710




> 3.5 A clip connector
for LED RGB strip light, 10 mm

	Cat. No.
Clip connector	833.89.209



> 3.5 A/20 AWG interconnecting lead
for LED RGB strip light, 10 mm

Length mm	Cat. No.
50	833.89.200
500	833.89.201
2000	833.89.202



> Corner connector, 90° rigid, 3.5 A
for left or right for LED RGB strip light,
10 mm

	Cat. No.
Corner connector rigid	833.89.189


Profiles for recess mounting

Aluminium

Häfele Loox5 profile 1104 / 1103



Häfele Loox5 profile 1104

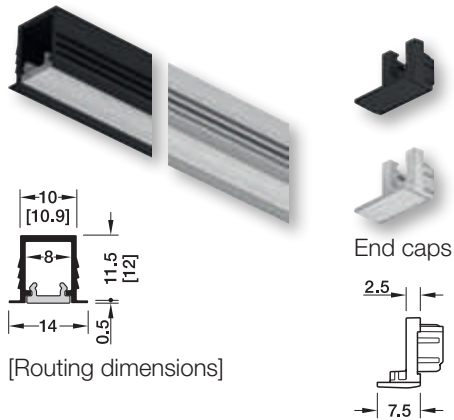

- > Material: Profile: Aluminium, diffuser: Plastic
- > Finish/colour: Profile: Anodized, diffuser: White opal, transmittance 70–80 %
- > Length: 3000 mm
- > Diffuser width: Profile 1104: 8 mm
- > Supplied with: Profile 1103: 11 mm
1 aluminium profile
1 diffuser white opal

Colour	Profile 1104	Profile 1103
Black	833.95.725	833.95.723
Silver coloured	833.95.724	833.95.722

Note
Profile 1104 usable for LED strip lights up to max. 5 mm width.

End caps for Häfele Loox5 profile 1104, 1103


- > Material: Plastic
- > Version: With cable outlet
- > Packing:: 10 pieces

Colour	End cap 1104	End cap 1103
Black	833.95.769	833.95.767
Silver coloured	833.95.768	833.95.766

Diffusers
The diffuser creates a uniform light.
The LED points are invisible from 120 LEDs/m.
If required, please order alternative diffusers in black or transparent separately.

Diffusers see page 35

Häfele Loox5 profile 1103

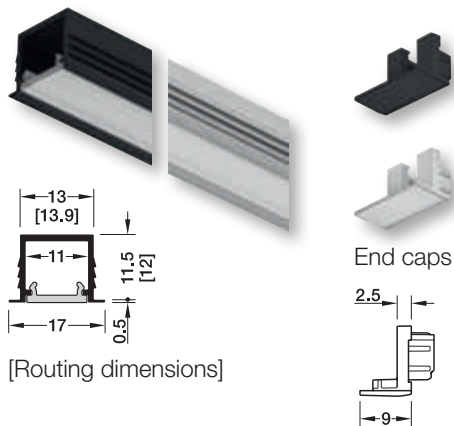




Profiles for recess mounting

Aluminium

Häfele Loox5 profile 1105, asymmetric light distribution



Häfele Loox5 profile 1105

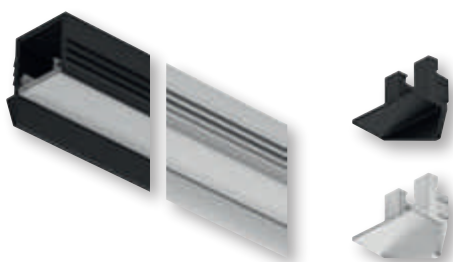

- > Material: Profile: Aluminium, diffuser: Plastic
- > Finish/colour: Profile: Anodized, diffuser: White opal, transmittance 70–80 %
- > Length: 3000 mm
- > Diffuser width: 11 mm
- > Supplied with: 1 aluminium profile
1 diffuser white opal

Colour	Cat. No.
Black	833.95.727
Silver coloured	833.95.726

End caps for Häfele Loox5 profile 1105

- > Material: Plastic
- > Version: With cable outlet
- > Packing:: 10 pieces

Colour	Cat. No.
Black	833.95.771
Silver coloured	833.95.770

Anti-glare shield

Asymmetric light distribution allows for a glare-free light source.

Diffusers
The diffuser creates a uniform light. The LED points are invisible from 120 LEDs/m. If required, please order alternative diffusers in black or transparent separately.

Diffusers see page 35


Profiles for recess mounting

Aluminium

Häfele Loox profile for recess mounting



End cap



- > Material: Aluminium
- > Finish/colour: Silver coloured anodized
- > Length x width: 2500 x 18 mm
- > Height: 8.5 mm
- > Supplied with: 1 profile, 1 diffuser

Cover	Cat. No.
Milky	833.72.844
Frosted	833.72.845

! LED points are always visible when this profile is used

+ End cap with cable outlet for 833.72.844 and 833.72.845

- > Material: Plastic, silver coloured
- > Supplied with: 2 pieces


	Cat. No.
End cap for 833.72.844 and 833.72.845	833.72.855

➔ Switch for aluminium profiles 16 mm see page 90
Diffusers see page 35

Häfele Loox profile for recess mounting



End cap



- > Material: Aluminium
- > Finish/colour: Silver coloured anodized
- > Length x width: 2500 x 18 mm
- > Height: 13 mm
- > Supplied with: 1 profile, 1 diffuser

Cover	Cat. No.
Milky	833.72.846
Frosted	833.72.847

+ End cap with cable outlet for 833.72.846 and 833.72.847

- > Material: Plastic, silver coloured
- > Supplied with: 2 pieces



	Cat. No.
End cap for 833.72.846 and 833.72.847	833.72.854

➔ Switches for aluminium profiles 16 mm see page 90
Diffusers see page 35

Häfele Loox5 profile 1107 / 1106, asymmetric light distribution



Häfele Loox5 profile 1107





[Routing dimensions]

- > Material: Profile: Aluminium, diffuser: Plastic
- > Finish/colour: Profile: Anodized, diffuser: White opal, transmittance 70–80 %
- > Length: 3000 mm
- > Diffuser width: Profile 1107: 8 mm, profile 1106: 11 mm
- > Supplied with: 1 aluminium profile
1 diffuser white opal


Colour	Profile 1107	Profile 1106
Black	833.95.731	833.95.729
Silver coloured	833.95.730	833.95.728

! Profile 1106 usable for LED strip lights up to max. 5 mm width.
Profile 1107 usable for LED strip lights up to max. 5 mm width.
Glare-free light, ideal for vertical installation in wardrobes.


Häfele Loox5 profile 1106



End caps



[Routing dimensions]



+ End caps for Häfele Loox5 profile 1106

- > Material: Plastic
- > Version: With cable outlet
- > Mounting: For screw fixing
- > Packing:: 10 pieces

Colour	Cat. No.
Black	833.95.773
Silver coloured	833.95.772

! **Diffusers**
The diffuser creates a uniform light.
If required, please order alternative diffusers in black or transparent separately.

➔ Diffusers see page 35



Profiles for surface mounting

Aluminium

Häfele Loox5 profile 2101 / 2102



Häfele Loox5 profile 2101

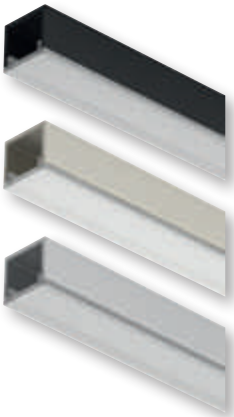

Surface mounted diffuser



- > Material: Profile: Aluminium, diffuser: Plastic
- > Finish/colour: Profile: Anodized, diffuser: White opal, transmittance 70–80 %
- > Length: 3000 mm
- > Diffuser width: Profile 2101: 13 mm
Profile 2102: 11 mm
- > Supplied with: 1 aluminium profile
1 diffuser white opal

Colour	Profile 2101	Profile 2102
Black	833.95.733	833.95.735
Brushed stainless steel coloured	833.95.762	833.95.763
Silver coloured	833.95.732	833.95.734

! Diffusers
The diffuser creates a uniform light. The LED points are invisible from 120 LEDs/m. If required, please order alternative diffusers in black or transparent (only for width 11 mm) separately.

➔ Diffusers see page 35

Häfele Loox5 profile 2102

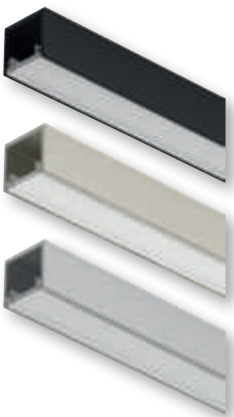


Flush recess mounted diffuser



Häfele Loox5 profile 2101 / 2102

Häfele Loox5 profile 2101



End caps




End caps for Häfele Loox5 profile 2101 / 2102

- > Material: Plastic
- > Version: With drill mark for cable outlet
- > Packing:: 10 pieces

Colour	End cap 2101	End cap 2102
Black	833.95.775	833.95.778
Brushed stainless steel coloured	833.95.776	833.95.779
Silver coloured	833.95.774	833.95.777

Häfele Loox5 profile 2102



End caps



Adhesive tape for Häfele Loox5 profile 2101 / 2102



- > Area of application: For fixing aluminium on wood, metals, or plastics
- > Version: Double-sided, high instant adhesion, high temperature resistance
- > Length: 33 m
- > Width: 10 mm
- > Thickness: 0.6 mm

	Cat. No.
Adhesive tape	833.89.266





Profiles for surface mounting

Aluminium

Häfele Loox5 profile 2103/2104, with concealed fixing



Häfele Loox5 profile 2103

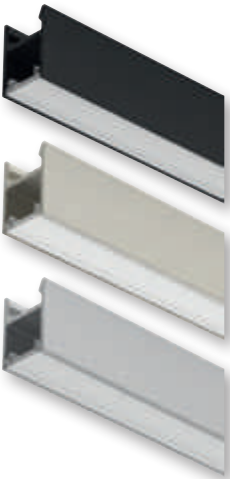

- > Material: Profile: Aluminium, diffuser: Plastic
- > Finish/colour: Profile: Anodized, diffuser: White opal, transmittance 70–80 %
- > Length: 3000 mm
- > Diffuser width: 11 mm
- > Supplied with: 1 aluminium profile
1 diffuser white opal



Colour	Profile 2103	Profile 2104
Black	833.95.737	833.95.739
Brushed stainless steel coloured	833.95.764	833.95.765
Silver coloured	833.95.736	833.95.738

Order reference
Please order (mandatory) mounting bracket separately.

Diffusers
The diffuser creates a uniform light.
The LED points are invisible from 120 LEDs/m.
If required, please order alternative diffusers in black or transparent separately.


Diffusers see page 35

Häfele Loox5 profile 2104, with asymmetric light distribution

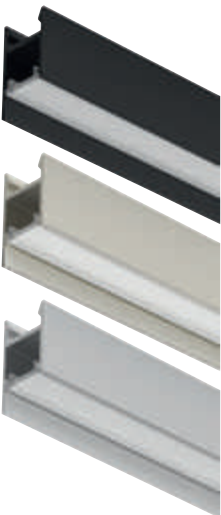




Häfele Loox5 profile 2103/2104, with concealed fixing



Mounting bracket for concealed fixing



Mounting bracket

- > Material: Stainless steel
- > Mounting: For screw fixing
- > Packing: 10 pieces

	Cat. No.
Mounting bracket	833.95.761

End caps for Häfele Loox5 profile 2103/2104

- > Material: Plastic
- > Version: With drill mark for cable outlet
- > Packing: 10 pieces

Colour	End cap 2103	End cap 2104
Black	833.95.781	833.95.784
Brushed stainless steel coloured	833.95.782	833.95.785
Silver coloured	833.95.780	833.95.783

Häfele Loox5 profile 2103





End caps



Häfele Loox5 profile 2104



End caps

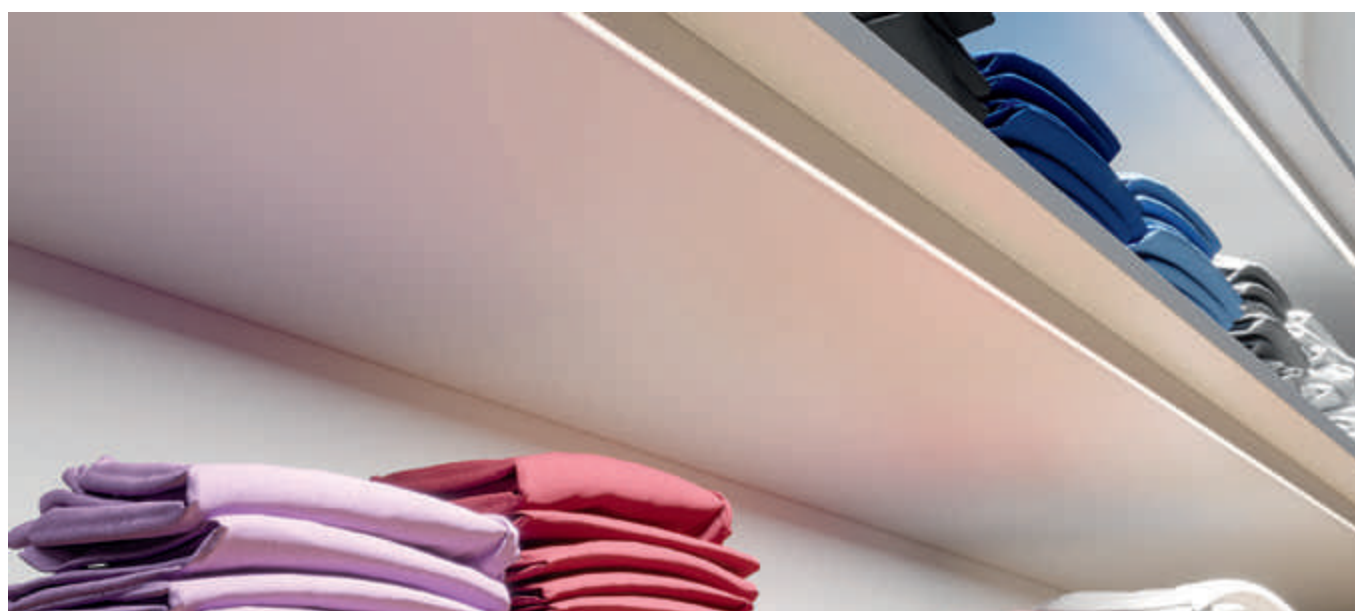


Profiles for surface mounting

Aluminium

Häfele Loox profile for recess mounting



End cap



- > Material: Aluminium
- > Finish/colour: Silver coloured anodized
- > Length x width x height: 2500 x 18 mm x 9.5 mm
- > Supplied with: 1 profile, 1 diffuser

Cover	Cat. No.
Milky	833.72.840
Frosted	833.72.843

Note
LED points are always visible when this profile is used.
Permanent operation (≥8 hours/day) only with LED strip lights up to 9.6 W/m.

Order reference
Please order retaining clip (optional) separately

+ **End cap**


- > Material: Plastic, silver coloured
- > Supplied with: 2 pieces

	Cat. No.
End cap for 833.72.840 and 833.72.843	833.72.852

➔ Switch for aluminium profiles 16 mm see page 90
Diffusers see page 35



End cap



- > Material: Aluminium
- > Finish/colour: Silver coloured anodized
- > Length x width x height: 2500 x 18 mm x 14 mm
- > Supplied with: 1 profile, 1 diffuser

Cover	Cat. No.
Milky	833.72.841
Frosted	833.72.842

! **Order reference**
Please order retaining clip (optional) separately

+ **End cap**

- > Material: Plastic, silver coloured
- > Supplied with: 2 pieces

	Cat. No.
End cap for 833.72.841 and 833.72.842	833.72.853

+ **Retaining clip**

- > Material: Stainless steel, silver coloured
- > Supplied with: 2 pieces

Version	Cat. No.
Retaining clip	833.74.832
Retaining clip 40°	833.74.833

➔ Switch for aluminium profiles 16 mm see page 90
Diffusers see page 35



Retaining clip




Retaining clip 40°

Profiles for surface mounting

Aluminium

Häfele Loox profile for recess mounting, with attached diffuser housing



End cap





Retaining clip



Retaining clip 40°



Mounting arm



- > Material: Profile: Aluminium
Diffuser housing: Plastic
- > Finish/colour: Profile: Silver coloured anodized
Diffuser housing: Milky
- > Length x width: 2500 x 18 mm
- > Height: 18 mm
- > Supplied with: 1 aluminium profile
1 diffuser housing milky

	Cat. No.
Profile for recess mounting, with attached diffuser housing	833.74.813



End cap

- > Material: Plastic, silver coloured
- > Version: With cable outlet
- > Supplied with: 2 pieces

	Cat. No.
End cap	833.74.823

Retaining clip

- > Material: Stainless steel, silver coloured
- > Application: For mounting as downlight
- > Supplied with: 2 pieces

Version	Cat. No.
Retaining clip	833.74.832
Retaining clip 40°	833.74.833

Mounting arm for profile 833.74.813

- > Material: Aluminium, silver coloured anodized
- > Version: Can be swivelled 30° horizontally
- > Length x width: 175 x 30 mm
- > Height: 40 mm
- > Application: For surface mounting
- > Supplied with: 1 pair of mounting arms,
2 end caps

	Cat. No.
Mounting arm for profile 833.74.813	833.74.834




Max. distance of retaining clips 500 mm.
The mounting arms make it possible to have customised, perfectly fitting surface mounted cabinet lights.

Profiles for surface mounting

Aluminium

Häfele Loox profile for recess mounting, asymmetric light distribution




- > Material: Aluminium
- > Finish/colour: Profile: Silver coloured anodized
Diffuser: Milky
- > Version: Indirect light output
- > Length x width: 2500 x 36 mm
- > Height: 18.4 mm
- > Diffuser width: 16 mm
- > Supplied with: 1 aluminium profile
1 diffuser milky

Profile for recess mounting, angled	Cat. No. 833.74.898
-------------------------------------	--------------------------------------

+ End cap	
> Material: Plastic, silver coloured	
> Supplied with: 2 pieces	
End cap	Cat. No. 833.74.899

Häfele Loox corner profile



- > Material: Aluminium
- > Finish/colour: Profile: Silver coloured anodized
Diffuser: Milky
- > Cover: Milky
- > Length x width: 2500 x 28 mm
- > Height: 20 mm
- > Supplied with: 1 aluminium profile
1 diffuser milky



Corner profile	Cat. No. 833.74.812
----------------	--------------------------------------

+ > Material: End cap and holder: Plastic, silver coloured Mounting plate: Stainless steel	
> Supplied with: 2 pieces	
End cap with cable outlet	Cat. No. 833.74.822
Holder	833.74.825
Mounting plate	833.74.826


Profiles for surface mounting

Aluminium

Häfele Loox drawer profile




End caps




Retaining clip



Door sensor



Motion detector



- > Material: Aluminium
- > Finish/colour: Profile: Silver coloured anodized
Diffuser: Milky
- > Length x width: 2500 x 18 mm
- > Height: 12.5 mm
- > Supplied with: 1 aluminium profile
1 diffuser milky

	Cat. No.
Drawer profile	833.74.835



End cap set

- > Material: ABS plastic, silver coloured
- > Supplied with: 5 sets of end caps,
fixing screws

	Cat. No.
End cap set	833.74.877

Retaining clip

- > Material: Stainless steel, silver coloured
- > Supplied with: 2 pieces

	Cat. No.
Retaining clip	833.74.893

Loox5 door sensor for Häfele Loox drawer profile

- > Area of application: For monochrome Loox5 LED
strip lights 8 mm

Voltage	Switching capacity	Cat. No.
5 12V	60 W	833.89.251
5 24V	90 W	833.89.253

Loox5 motion detector for Häfele Loox drawer profile

- > Area of application: For monochrome Loox5 LED
strip lights 8 mm
- > Delay time: 30 sec.
- > Sensor range: 0–3000 mm

Voltage	Switching capacity	Cat. No.
5 12V	60 W	833.89.252
5 24V	90 W	833.89.254

Profiles

Aluminium


Häfele Loox wardrobe rail, asymmetric light distribution



Rail end support, side panel



Wardrobe rail, rail centre support



- > Material: Aluminium
- > Finish/colour: Profile: Silver coloured anodized
Diffuser: Milky
- > Length x width: 2500 x 15 mm
- > Height: 30 mm
- > Supplied with: 1 aluminium profile
1 diffuser milky

	Cat. No.
Häfele Loox wardrobe rail	833.72.790

! LED points are always visible when this profile is used.


- +** **Rail end support, side panel**
- > Material: Zinc alloy
- > Mounting: For screw fixing to side panel
- > Supplied with: 1 piece

	Cat. No.
Rail end support, side panel	803.33.757

- +** **Wardrobe rail, rail centre support**
- > Material: Zinc alloy, chrome plated
- > Mounting: For screw fixing
- > Supplied with: 1 piece

	Cat. No.
Wardrobe rail, rail centre support	802.07.200

Häfele Loox glass edge profile



- > Material: Plastic
- > Finish/colour: Profile: Silver coloured
Diffusers: Milky
- > Length x width: 2000 x 17.5 mm
- > Height: 22 mm
- > Application: For screw fixing
- > Supplied with: 1 aluminium profile
2 diffusers milky

	Cat. No.
Glass edge profile	833.74.733

Effect of the glass edge on the light




- > Glass edge with satin finish = even light line
- > Clear glass edge = point light

! For manufacturing customised glass edge lighting for glass thicknesses of 4–8 mm. Without load bearing function. Only for LED strip lights with max. 9.6 W/m. Note the dimensions of the clip connector.

Glass edge light

Monochrome

Häfele Loox LED 2019



Effect of the glass edge on the light

- > Glass edge with satin finish = even light line
- > Clear glass edge = point light

- > Dimmable: Yes
- > Material: Stainless steel
- > Length x width: 40 X 25.5 mm
- > Height: 12 mm
- > Degree of protection: IP20
- > Number of LEDs: 3
- > Mounting: Is pushed onto the glass shelf from the rear
- > Glass thickness: 6–12 mm
- > Supplied with: 1 light with 2 m lead

! Without load bearing function

12V 5 12V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

➔ Glass edge profile for individual lengths up to 2 m see page 32

Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI	Weighted energy consumption kWh/1000 h	Finish/colour	Cat. No.
K	W	lm	lm/W	R _a			
4000	0.2	15	75	88	0.22	Bright	833.74.130
6000	0.2	19	95	84	0.22	Bright	833.74.120



Profiles for recess mounting

Plastic

Häfele Loox5 profile 1102/1101





Häfele Loox5 profile 1102



[Routing dimensions]

Häfele Loox5 profile 1101



[Routing dimensions]

- > Material: Plastic
- > Length: 3000 mm
- > Supplied with: 1 plastic profile

Colour	Transmittance	Profile 1102	Profile 1101
Black	~20 %	833.95.741	833.72.899
white opal	70-80 %	833.95.740	833.72.898

Note
 Profiles 1102 and 1101 suitable for use with LED strip lights up to max. 9.6 W/m.
 Profile 1102 suitable for use with LED strip lights max. 5 mm wide.
 Profile 1101 suitable for use only with LED strip lights with a width of precisely 8 mm.

The diffuser creates a uniform light.
 The LED points in the white version are invisible from 120 LEDs/m.


Diffusers, cooling strip



Diffusers Häfele Loox5 for profiles for recess mounting 1103-1107 as well as for profiles for recess mounting 2101-2104



Dimensions



- > Material: Plastic
- > Length: 3000 mm
- > Supplied with: 1 diffuser

Width mm	Transmittance		
	transparent, ~90 %	white opal, 70–80 %	black, ~20 %
8	833.95.797	833.95.754	833.95.758
11	833.95.757	833.95.755	833.95.759
13	-	833.95.756	833.95.760

! The white diffuser creates a uniform light. The LED points are invisible from 120 LEDs/m. When using the black diffuser, LED points may be visible. LED points are always visible when the transparent diffuser is used.


Diffusers Häfele Loox for profiles with 16 mm internal dimension



Frosted



Milky



Protruding



Flush

- > Material: Plastic
- > Length: 2500 mm
- > Supplied with: 1 diffuser


Cover	Cat. No.
Version: Protruding, for push fitting	
Frosted	833.74.780
Milky	833.74.781
Version: Flush, for sliding in	
Frosted	833.72.858
Milky	833.72.859

! Simple replacement of existing diffusers in order to switch from frosted to milky, e.g.. Cannot be used for the following aluminium profiles: 833.74.812, 833.74.813, 833.74.814 or for aluminium profiles with curved diffusers.

Häfele Loox cooling strip



- > Material: Aluminium
- > Length x width: 1000 x 10 mm
- > Height: 2 mm
- > Mounting: For screw fixing, drill holes at 250 mm, 500 mm, and 750 mm
- > Supplied with: 1 profile

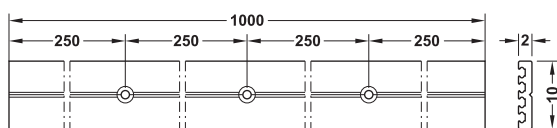

	Cat. No.
Cooling strip	833.77.700

Surface mounted lights



Monochrome, length 300 mm



Häfele Loox LED 2032



- > Dimmable: Yes
- > Material: Aluminium
- > Length x width: 300 x 180 mm
- > Height: 50 mm
- > Energy efficiency class: A+
- > Degree of protection: IP44
- > Number of LEDs: 27
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

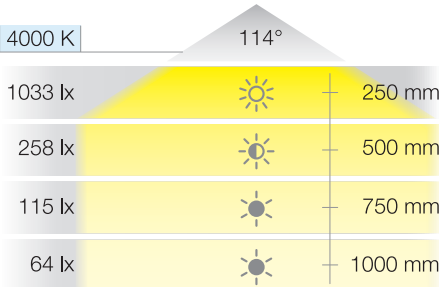


Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI	Weighted energy consumption kWh/1000 h	Finish/colour	Cat. No.
K	W	lm	lm/W	R _a			
4000	3	200	67	84	3.30	Silver coloured	833.74.070
4000	3	200	67	84	3.30	Chrome plated	833.74.080


Drawer lights


Battery-operated light, monochrome length 300 mm

Häfele Loox LED 9005

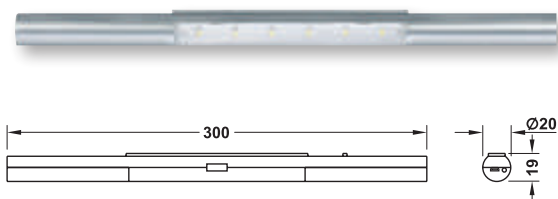

- > Version: With automatic shut-off
- > Material: Plastic
- > Diameter: 20 mm
- > Length: 300 mm
- > Degree of protection: IP20
- > Number of LEDs: 6
- > Operating time: 6 hrs.
- > Charging time: 3–4 hrs.
- > 2 operating modes:
 1. Door sensor switch (factory setting): Door open, light on – door closed, light off. Energy-saving mode after 30 seconds: LED flashes 2 to 3 times and then turns off.
 2. Sensor switch: Manual on/off switching at the sensor
- > Mounting: The light is pushed onto the mounting plate
- > Supplied with: 1 light with mounting plate for screw fixing and 0.8 m micro-USB cable

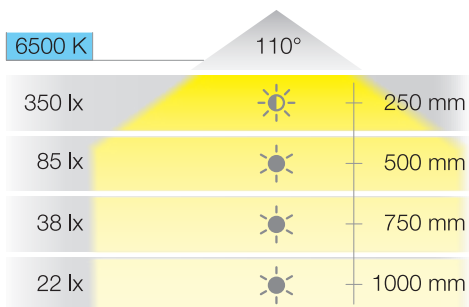

 The light can be recharged using the supplied micro-USB cable

Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI R _a	Finish/colour	Cat. No.
6500	0.6	51	85	82	Silver colour lacquered	833.87.020

LOOX:2019, HDE-en, 02/20; Dimensional data not binding. We reserve the right to alter specifications without notice.



Recess/surface mounted downlights

Modular monochrome, drill hole Ø: 58 mm



Häfele Loox LED 2025, Loox5 2092/3092



LED 2092 and LED 3092, equipped with high-quality Samsung LEDs

- > Dimmable: Yes
- > Material: Aluminium
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted downlight; IP20 as surface mounted downlight
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 58 mm
- > Supplied with: 1 light module

2700 K	3000 K	4000 K	5000 K	80°	
2600 lx	2650 lx	2700 lx	2800 lx		250 mm
730 lx	750 lx	780 lx	800 lx		500 mm
320 lx	350 lx	345 lx	350 lx		750 mm
180 lx	185 lx	185 lx	190 lx		1000 mm

LED 2025

2700 K	3000 K	4000 K	5000 K	80°	
1870 lx	1990 lx	2025 lx	2135 lx		250 mm
500 lx	540 lx	540 lx	580 lx		500 mm
210 lx	230 lx	235 lx	240 lx		750 mm
120 lx	125 lx	130 lx	135 lx		1000 mm

LED 2092/3092

Note
The IP44 degree of protection is reduced to IP20 when mounting as downlight or recess mounting with through hole.

Order reference
Please order lead and housing separately.

Loox5 12 V driver see page 121


Loox5 24 V driver see page 122

Häfele Loox LED 2025, Loox5 2092/3092


Voltage V	Quantity LEDs	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI		Weighted energy consumption kWh/1000 h	Cat. No.	
						R _a	R ₉			
5 12V	Häfele Loox LED 2025 (compatible with Loox5 lead with snap-in connector)									
	1	2700	3.8	270	71	>90	–	4.18	833.72.350	
		3000	3.8	300	78	>90	–	4.18	833.72.351	
		4000	3.8	306	80	>90	–	4.18	833.72.352	
		5000	3.8	345	90	>83	–	4.18	833.72.323	
	Häfele Loox5 LED 2092									
	6	2700	3.4	220	65	>90	>55	3.74	833.72.474	
		3000	3.4	240	71	>90	>55	3.74	833.72.475	
		4000	3.4	250	74	>90	>55	3.74	833.72.476	
		5000	3.4	260	76	>90	>55	3.74	833.72.477	
	5 24V	Häfele Loox5 LED 3092								
		6	2700	3.4	220	65	>90	>55	3.74	833.75.174
			3000	3.4	240	71	>90	>55	3.74	833.75.175
4000			3.4	250	74	>90	>55	3.74	833.75.176	
5000			3.4	260	76	>90	>55	3.74	833.75.177	




Recess mounted housing




Recess mounting, square




Recess mounting, round

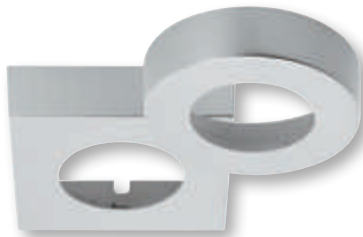

Downlight housing




Mounting as downlight, square



Mounting as downlight, round

Housings are suitable for monochrome lights and for multi-white lights.

* valid for multi-white plugs.



> Lead, 1.5 A/24 AWG, with snap-in connector

Voltage	Length	Cat. No.
5 12V	1000 mm	833.95.789
	2000 mm	833.95.788
5 24V	2000 mm	833.95.791



> Housing for recess mounting, plastic

Colour	Round	Square
Black	833.72.168	833.72.172
Anthracite	833.72.380	833.72.383
Brown	833.72.381	833.72.384
Matt nickel plated	833.72.170	833.72.174
Stainless steel coloured	833.72.382	833.72.385
Silver coloured	833.72.126	833.72.127
White, RAL 9003	833.72.171	833.72.175



> Downlight housing, plastic

Colour	Round	Square
Black	833.72.160	833.72.164
Anthracite	833.72.193	833.72.195
Brown	833.72.192	833.72.196
Matt nickel plated	833.72.162	833.72.166
Stainless steel coloured	833.72.194	833.72.197
Silver coloured	833.72.124	833.72.125
White, RAL 9003	833.72.163	833.72.167

Recess/surface mounted downlights

Modular multi-white, drill hole Ø: 58 mm



Häfele Loox5 LED 2091 / 3091



Equipped with high-quality Samsung LEDs

- > Dimmable: Yes
- > Material: Aluminium
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted downlight; IP20 as surface mounted downlight
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 58 mm
- > Supplied with: 1 light module

2700 K		5000 K		80°	
2000 lx	2100 lx			250 mm	
520 lx	550 lx			500 mm	
220 lx	235 lx			750 mm	
120 lx	125 lx			1000 mm	



Note

The IP44 degree of protection is reduced to IP20 when mounting as downlight or recess mounting with through hole.

Order reference

Please order lead and housing separately.



5 12V

Loox5 12 V driver see page 121

5 24V

Loox5 24 V driver see page 122




Colour control only via 6-way distributor Häfele Connect Mesh with multi-white adapter and remote control or smartphone. Please order separately, see chapter Networking, page 96

Häfele Loox5 LED 2091 / 3091


Voltage V	Quantity LEDs	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI		Weighted energy consumption kWh/1000 h	Cat. No.
						R _a	R ₉		
5 12V	Häfele Loox5 LED 2091								
	12	2700 5000	3.4	240 270	72 80	>90	>55	3.74	833.72.478
5 24V	Häfele Loox5 LED 3091								
	12	2700 5000	3.4	240 270	72 80	>90	>55	3.74	833.75.178



Recess mounted housing




Recess mounting, square




Recess mounting, round



Downlight housing




Mounting as downlight, square



Mounting as downlight, round

Housings are suitable for monochrome lights and for multi-white lights.

* valid for multi-white plugs.



> Lead, 1.5 A/24 AWG, with snap-in connector for multi-white lights

Voltage	Length	Cat. No.
5 12V	2000 mm	833.95.787
5 24V	2000 mm	833.95.790



> Housing for recess mounting, plastic

Colour	Round	Square
Black	833.72.168	833.72.172
Anthracite	833.72.380	833.72.383
Brown	833.72.381	833.72.384
Matt nickel plated	833.72.170	833.72.174
Stainless steel coloured	833.72.382	833.72.385
Silver coloured	833.72.126	833.72.127
White, RAL 9003	833.72.171	833.72.175



> Downlight housing, plastic

Colour	Round	Square
Black	833.72.160	833.72.164
Anthracite	833.72.193	833.72.195
Brown	833.72.192	833.72.196
Matt nickel plated	833.72.162	833.72.166
Stainless steel coloured	833.72.194	833.72.197
Silver coloured	833.72.124	833.72.125
White, RAL 9003	833.72.163	833.72.167

Recess/surface mounted downlights

Modular monochrome, drill hole Ø: 35 mm



Häfele Loox5 LED 2040



- > Dimmable: Yes
- > Material: Aluminium
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted downlight; IP20 as surface mounted downlight
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 35 mm
- > Supplied with: 1 light module

2700 K	3000 K	4000 K	5000 K	90°	
530 lx	660 lx	720 lx	800 lx		250 mm
135 lx	180 lx	185 lx	220 lx		500 mm
55 lx	80 lx	85 lx	95 lx		750 mm
35 lx	40 lx	50 lx	55 lx		1000 mm

Note
The IP44 degree of protection is reduced to IP20 when mounting as downlight or recess mounting with through hole.

Order reference
Please order lead and housing separately.


5 12V Loox5 12 V driver see page 121

Häfele Loox5 LED 2040


Voltage	Quantity	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index	Weighted energy consumption	Cat. No.
V	LEDs	K	W	lm	lm/W	CRI R _a	kWh/1000 h	
5 12V	3	2700	1.5	75	50	90	1.65	833.72.370
		3000	1.5	88	59	90	1.65	833.72.371
		4000	1.5	96	64	90	1.65	833.72.372
		5000	1.5	110	73	83	1.65	833.72.333



Recess mounted housing




Recess mounting, square




Recess mounting, round




Downlight housing



Mounting as downlight, square



Mounting as downlight, round




> Lead, 1.5 A/24 AWG, with snap-in connector

Voltage	Length	Cat. No.
5 12V	1000 mm	833.95.789
	2000 mm	833.95.788



> Housing for recess mounting, plastic

Colour	Round	Square
Black	833.72.184	833.72.188
Matt nickel plated	833.72.186	833.72.190
Silver coloured	833.72.145	833.72.146
White, RAL 9003	833.72.187	833.72.191



> Downlight housing, plastic

Colour	Round	Square
Black	833.72.176	833.72.180
Matt nickel plated	833.72.178	833.72.182
Silver coloured	833.72.143	833.72.144
White, RAL 9003	833.72.179	833.72.183

Recess/surface mounted downlights

Monochrome, drill hole Ø: 26 mm



Häfele Loox5 LED 2090/3090



> Narrow beam angle for staging objects

Equipped with high-quality Samsung LEDs

- > Dimmable: Yes
- > Material: Aluminium
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted downlight; IP20 as surface mounted downlight
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 26 mm
- > Supplied with: 1 light module with 2 m lead

2700 K	3000 K	4000 K	5000 K	55°	
930 lx	990 lx	1005 lx	1005 lx		250 mm
230 lx	240 lx	250 lx	260 lx		500 mm
95 lx	100 lx	110 lx	115 lx		750 mm
50 lx	55 lx	60 lx	60 lx		1000 mm

LED 2090

2700 K	3000 K	4000 K	5000 K	55°	
825 lx	870 lx	935 lx	940 lx		250 mm
220 lx	225 lx	235 lx	245 lx		500 mm
95 lx	95 lx	100 lx	105 lx		750 mm
50 lx	55 lx	55 lx	60 lx		1000 mm

LED 3090

Note
The IP44 degree of protection is reduced to IP20 when mounting as downlight or recess mounting with through hole.

Order reference
Please order housing separately.

Loox5 12 V driver see page 121

Loox5 24 V driver see page 122




Häfele Loox5 LED 2090/3090

Voltage V	Quantity LEDs	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI		Weighted energy consumption kWh/1000 h	Cat. No.
						R _a	R ₉		
5_{12V}	Häfele Loox5 LED 2090								
	1	2700	1.2	80	67	>90	>60	1.32	833.72.470
		3000	1.2	90	75	>90	>60	1.32	833.72.471
		4000	1.2	95	79	>90	>60	1.32	833.72.472
5000		1.2	100	83	>90	>60	1.32	833.72.473	
5_{24V}	Häfele Loox5 LED 3090								
	1	2700	1.2	75	63	>90	>60	1.32	833.75.170
		3000	1.2	80	67	>90	>60	1.32	833.75.171
		4000	1.2	80	67	>90	>60	1.32	833.75.172
5000		1.2	85	71	>90	>60	1.32	833.75.173	




Recess mounted housing

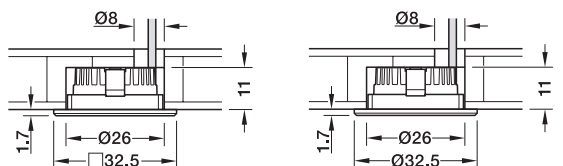


Recess mounting, square

Recess mounting, round




Downlight housing

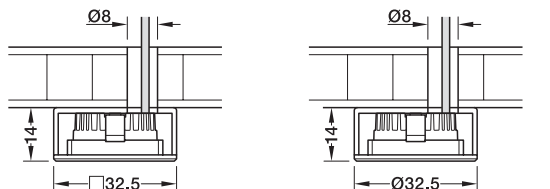


Mounting as downlight, square

Mounting as downlight, round



> Housing for recess mounting, plastic

Colour	Round	Square
Black	833.89.225	833.89.232
Anthracite	833.89.226	833.89.233
Brown	833.89.227	833.89.234
Matt nickel plated	833.89.223	833.89.230
Stainless steel coloured	833.89.228	833.89.235
Silver coloured	833.89.222	833.89.229
White, RAL 9003	833.89.224	833.89.231



> Downlight housing, plastic

Colour	Round	Square
Black	833.89.239	833.89.246
Anthracite	833.89.240	833.89.247
Brown	833.89.241	833.89.248
Matt nickel plated	833.89.237	833.89.244
Stainless steel coloured	833.89.242	833.89.249
Silver coloured	833.89.236	833.89.243
White, RAL 9003	833.89.238	833.89.245

Recess/surface mounted downlights

Monochrome, drill hole Ø: 55 mm



Häfele Loox LED 2047/3038



- > Dimmable: Yes
- > Material: Steel
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 55 mm
- > Supplied with: 1 light with 2 m lead

3000 K	4000 K	5000 K	120°	
560 lx	570 lx	670 lx		250 mm
210 lx	215 lx	245 lx		500 mm
115 lx	115 lx	135 lx		750 mm
75 lx	75 lx	90 lx		1000 mm

LED 2047

3000 K	4000 K	5000 K	120°	
580 lx	590 lx	710 lx		250 mm
220 lx	220 lx	265 lx		500 mm
115 lx	115 lx	140 lx		750 mm
75 lx	75 lx	100 lx		1000 mm


LED 3038

- 12V** **5 12V** Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.
- 24V** **5 24V** Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.




Häfele Loox LED 2047/3038

Voltage V	Number of LEDs	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Stainless steel coloured	Silver coloured	Polished chrome plated
12 V	Häfele Loox LED 2047									
	24	3000	3	210	70	90	3.3	833.72.390	833.72.340	833.72.300
		4000	3	216	72	90	3.3	833.72.391	833.72.341	833.72.301
5000		3	240	80	83	3.3	833.72.392	833.72.342	833.72.302	
24 V	Häfele Loox LED 3038									
	24	3000	3	215	72	90	3.3	833.75.150	833.75.120	833.75.140
		4000	3	225	75	90	3.3	833.75.151	833.75.121	833.75.141
5000		3	245	82	83	3.3	833.75.152	833.75.122	833.75.142	




> Downlight housing


Colour	Cat. No.
Stainless steel coloured	833.72.804
Silver coloured	833.72.803
Polished chrome plated	833.72.802



Recess mounting



Mounting as downlight

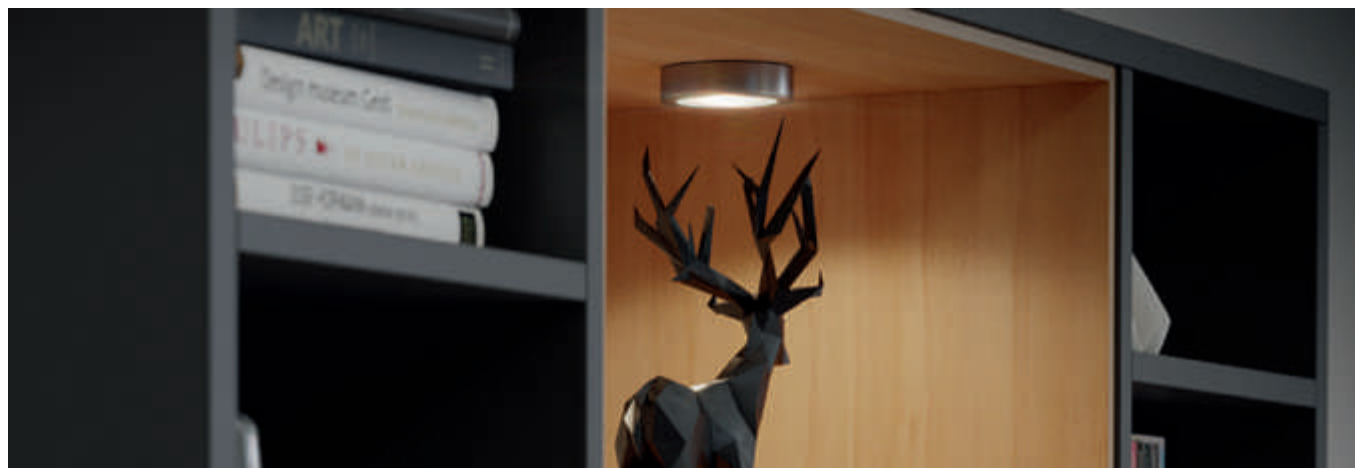

Recess/surface mounted downlights

Multi-white, drill hole Ø: 55 mm



Häfele Loox LED 2048/3039



2700 K		5000 K		120°	
290 lx	345 lx	[Beam Diagram]		250 mm	[Sun Icon]
110 lx	130 lx	[Beam Diagram]		500 mm	[Sun Icon]
60 lx	70 lx	[Beam Diagram]		750 mm	[Sun Icon]
40 lx	45 lx	[Beam Diagram]		1000 mm	[Sun Icon]

LED 2048

2700 K		5000 K		120°	
335 lx	350 lx	[Beam Diagram]		250 mm	[Sun Icon]
125 lx	130 lx	[Beam Diagram]		500 mm	[Sun Icon]
70 lx	70 lx	[Beam Diagram]		750 mm	[Sun Icon]
45 lx	45 lx	[Beam Diagram]		1000 mm	[Sun Icon]

LED 3039


> Dimmable via multi-white mixer

- > Material: Steel
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 55 mm
- > Supplied with: 1 light with 2 m multi-white lead




> Remote control 12/24 V

For multi-white mixer 12/24 V	Cat. No. 833.77.786
-------------------------------	--------------------------------------



> Multi-white mixer

		Cat. No.
12V	With 8-way distributor, max. 30 W Power consumption 0.3 W	833.73.750
24V	With 8-way distributor, max. 60 W Power consumption 0.3 W	833.77.787



> 8-way distributor 12/24 V

8-way distributor 12/24 V	Cat. No. 833.77.721
---------------------------	--------------------------------------




Drivers for multi-white mixer

- 12V 5 12V** Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.
- 24V 5 24V** Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.




Häfele Loox LED 2048/3039


Voltage V	Number of LEDs	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Stainless steel coloured	Silver coloured	Polished chrome plated
12 V Häfele Loox LED 2048										
	60	2700 5000	3	255	85	90 83	3.3	833.72.400	833.72.311	833.72.310
24 V Häfele Loox LED 3039										
	60	2700 5000	3	258	85	90 83	3.3	833.75.160	833.75.131	833.75.130



Recess mounting




Mounting as downlight



> Downlight housing

Colour	Cat. No.
Stainless steel coloured	833.72.804
Silver coloured	833.72.803
Polished chrome plated	833.72.802

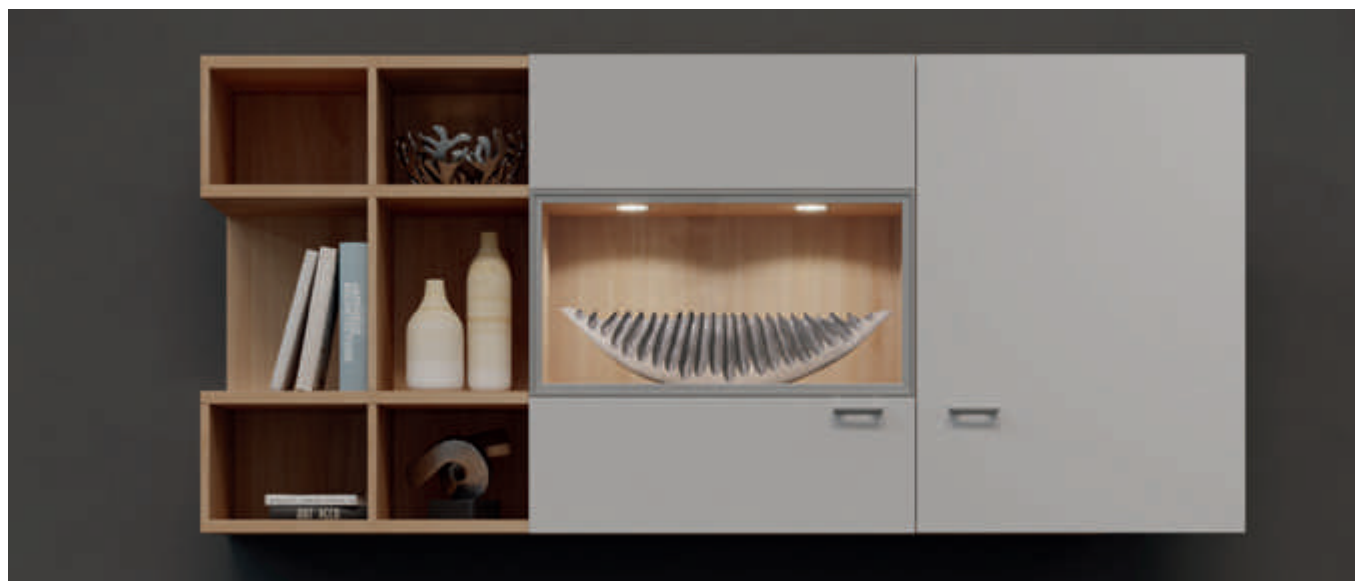

Recess/surface mounted downlights


Monochrome, drill hole Ø: 55 mm



Häfele Loox LED 2020



- > Dimmable: Yes
- > Material: Zinc alloy
- > Energy efficiency class: A
- > Degree of protection: IP44 as recess mounted downlight; IP20 with downlight housing (surface mounted downlight)
- > Number of LEDs: 6
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 55 mm
- > Supplied with: 1 light with 2 m lead, including fixing materials

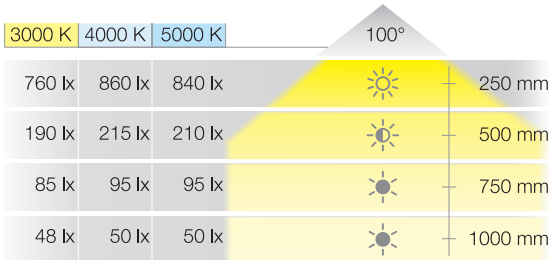


12 V 5 12 V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

The IP44 degree of protection is reduced to IP20 when mounting as downlight or recess mounting with through hole.


Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Black	Matt nickel plated	Polished chrome plated
V	K	W	lm	lm/W					
12 V	3000	3.2	142	44	83	3.52	833.72.281	833.72.280	833.72.282
	4000	3.2	150	47	83	3.52	833.72.284	833.72.283	833.72.285
	5000	3.2	150	47	83	3.52	833.72.287	833.72.286	833.72.288




Häfele Loox LED 2020



Recess mounting



Mounting as downlight



> Downlight housing

Colour	Cat. No.
Black	833.72.801
Matt nickel plated	833.72.800
Polished chrome plated	833.72.802



Recess/surface mounted downlights

Monochrome, drill hole Ø: 26 mm



Häfele Loox LED 2022



- > Dimmable: Yes
- > Material: Aluminium
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted downlight; IP20 with downlight housing (surface mounted downlight)
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 26 mm
- > Supplied with: 1 light with 2 m lead

3000 K	4000 K	5000 K	90°	
650 lx	650 lx	650 lx		250 mm
163 lx	163 lx	163 lx		500 mm
72 lx	72 lx	72 lx		750 mm
40 lx	40 lx	40 lx		1000 mm


12V 5 12V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

The IP44 degree of protection is reduced to IP20 when mounting as downlight or recess mounting with through hole.


Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Silver coloured anodized	Polished chrome plated
V	K	W	lm	lm/W				
12V	3000	1.5	105	70	82	1.65	833.72.040	833.72.043
	4000	1.5	105	70	87	1.65	833.72.041	833.72.044
	5000	1.5	105	70	88	1.65	833.72.042	833.72.045




Häfele Loox LED 2022



Recess mounting



Mounting as downlight



> Downlight housing, round

Colour	Cat. No.
Silver coloured anodized	833.72.831
Chrome plated	833.72.830



> Downlight housing, wedge-shaped

Colour	Cat. No.
Silver coloured anodized	833.72.832
Chrome plated	833.72.833



Recess/surface mounted downlights


Monochrome, drill hole Ø: 26 mm



Häfele Loox LED 2023



- > Dimmable: Yes
- > Material: Aluminium
- > Length x width: 30 x 30 mm
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted downlight; IP20 with downlight housing (surface mounted downlight)
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole, for clamp fixing
- > Drill hole Ø: 26 mm
- > Supplied with: 1 light with 2 m lead

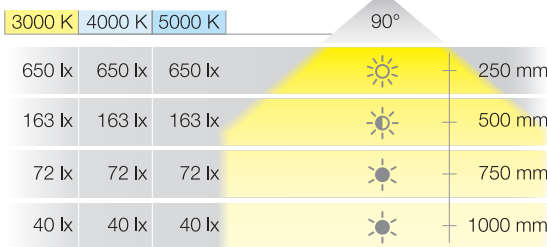

12V 512V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

The IP44 degree of protection is reduced to IP20 when mounting as downlight or recess mounting with through hole.

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Silver coloured anodized	Polished chrome plated
V	K	W	lm	lm/W				
12V	3000	1.5	105	70	82	1.65	833.72.064	833.72.060
	4000	1.5	105	70	82	1.65	833.72.065	833.72.061
	5000	1.5	105	70	82	1.65	833.72.066	833.72.062




Häfele Loox LED 2023




> Downlight housing, square, plastic

Colour	Cat. No.
Silver coloured	833.72.834
Chrome plated	833.72.835



Recess mounting



Mounting as downlight




Recess mounted downlights


Monochrome, drill hole Ø: 58 mm



Häfele Loox LED 2039



- > Dimmable: Yes
- > Material: Zinc alloy
- > Energy efficiency class: A
- > Degree of protection: IP65 after installation
- > Number of LEDs: 18
- > Mounting: For mounting in drilled hole, for clamp fixing
- > Drill hole Ø: 58 mm
- > Supplied with: 1 light with 4 m lead

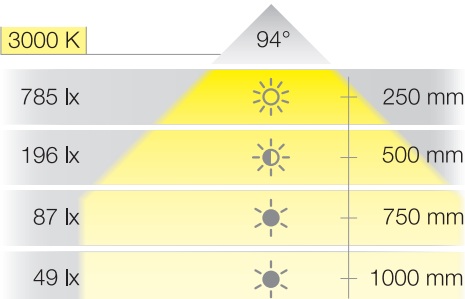

Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.


Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Matt nickel plated	Chrome plated
V	K	W	lm	lm/W				
12 V	3000	2.5	125	50	85	2.75	833.72.091	833.72.092

Recess mounted downlights


Monochrome, sensor-controlled, drill hole Ø: 40 mm



Häfele Loox LED 2028 with motion detector

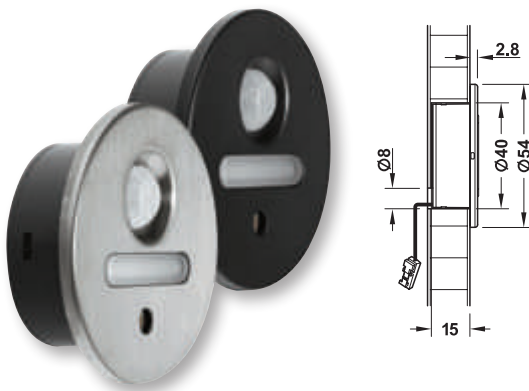

- > Not dimmable
- > Material: Stainless steel, plastic
- > Version: With motion detector active from a decreasing ambient light of 15 lx
- > Energy efficiency class: A+
- > Degree of protection: IP44
- > Delay time: approx. 2 min.
- > Sensor range: 0–3000 mm
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole
- > Drill hole Ø: 40 mm
- > Supplied with: 1 light with 2 m lead, including fixing materials

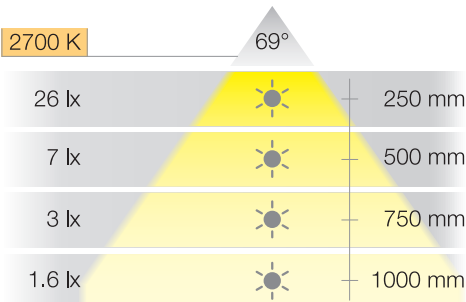

12V 5 12V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Black	Matt
V	K	W	lm	lm/W				
12V	2700	0.3	4	13	90	0.37	833.73.111	833.73.110

Surface mounted downlights


Monochrome, Ø 65 mm




Häfele Loox LED 2050



EXTRA SLIM
6 mm



- > Dimmable: Yes
- > Material: Plastic, silver coloured
- > Diameter: 65 mm
- > Height: 6 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 8
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

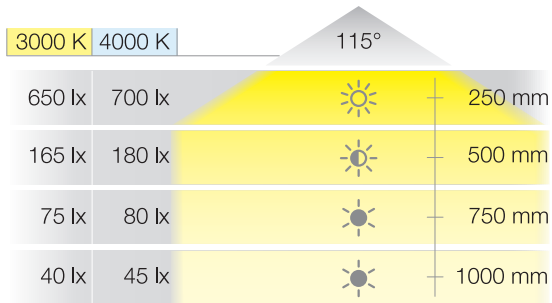

12V 512V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.


24V Also available as 24 V light, see page 72

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI	Weighted energy consumption	Cat. No.
V	K	W	lm	lm/W	R _a	kWh/1000 h	
12V	3000	2.5	170	68	90	2.75	833.74.040
	4000	2.5	180	72	90	2.75	833.74.041


Surface mounted downlights

Monochrome, 65 x 65 mm

Häfele Loox LED 2051



- > Dimmable: Yes
- > Material: Plastic, silver coloured
- > Length x width: 65 x 65 mm
- > Height: 6 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 8
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

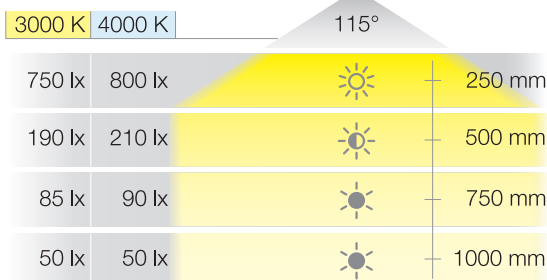

➡️ **12V** **5 12V** Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

➡️ **24V** Also available as 24 V light, see page 73

🌈 Also available as RGB light (12 V or 24 V), see page 78


Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI	Weighted energy consumption	Cat. No.
V	K	W	lm	lm/W	R _a	kWh/1000 h	
12V	3000	2.5	190	76	90	2.75	833.74.030
	4000	2.5	200	80	90	2.75	833.74.031

Surface mounted downlights

Monochrome, Ø 65 mm



Häfele Loox LED 2027



- > Dimmable: Yes
- > Material: Aluminium, silver coloured, plastic
- > Diameter: 65 mm
- > Height: 9 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 27
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

3000 K	4000 K	5000 K	117°	
867 lx	884 lx	918 lx		250 mm
216 lx	221 lx	229 lx		500 mm
96 lx	98 lx	102 lx		750 mm
54 lx	55 lx	57 lx		1000 mm

Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Voltage V	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Cat. No.
12V	3000	2.6	190	73	85	2.86	833.72.050
	4000	2.6	208	80	85	2.86	833.72.051
	5000	2.6	218	84	85	2.86	833.72.052



Surface mounted lights

Monochrome, 118 x 65 mm

Häfele Loox LED 2033



- > Dimmable: Yes
- > Material: Zinc alloy, plastic
- > Length x width: 65 x 118 mm
- > Height: 30 mm
- > Energy efficiency class: A
- > Degree of protection: IP44
- > Number of LEDs: 18
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

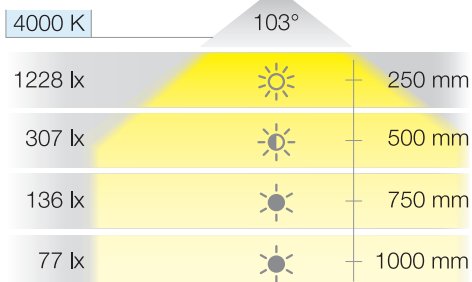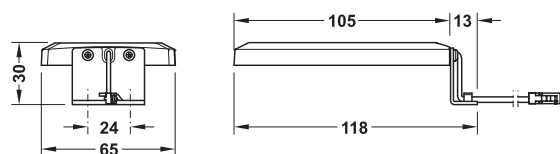

Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Chrome plated, black	Chrome plated, white
V	K	W	lm	lm/W				
12V	4000	3.8	219	58	85	4.18	833.74.160	833.74.161

Flexible surface mounted lights


Monochrome with USB



Häfele Loox LED 2034



WITH USB CHARGING STATION



- > Dimmable: Yes
- > Version: Integrated twin USB charging station 5 V / 2 A, integrated push switch for 2 brightness levels
- > Material: Aluminium
- > Length x width: 450 x 50 mm
- > Height: 15.5 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 3
- > Colour temperature: 4000 K (cool white)
- > Wattage: Max. 17 W (light: 1.5)
- > Luminous flux: 105 lm
- > Luminous efficacy: 70 (lm/W)
- > Mounting: For screw fixing beneath magnetic cover
- > Supplied with: 1 light with 2 m lead, including fixing materials

12V 5 12V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Min. 20 W driver per light for optimum operation of the USB charging station.

4000 K	90°	
650 lx		250 mm
163 lx		500 mm
72 lx		750 mm
40 lx		1000 mm

Voltage	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Finish/colour	Cat. No.
12V	82	1.65	Black	833.74.097
			Chrome plated	833.74.096

Flexible surface mounted lights


Monochrome

Häfele Loox LED 2035



- > Dimmable: Yes
- > Version: Integrated push switch for 2 brightness levels
- > Material: Aluminium
- > Length x width: 450 x 50 mm
- > Height: 15.5 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 3
- > Colour temperature: 4000 K (cool white)
- > Wattage: 1.5 W
- > Luminous flux: 105 lm
- > Luminous efficacy: 70 (lm/W)
- > Mounting: For screw fixing beneath magnetic cover
- > Supplied with: 1 light with 2 m lead, including fixing materials

LOOX 2019, HDE-en, 02/20; Dimensional data not binding. We reserve the right to alter specifications without notice.

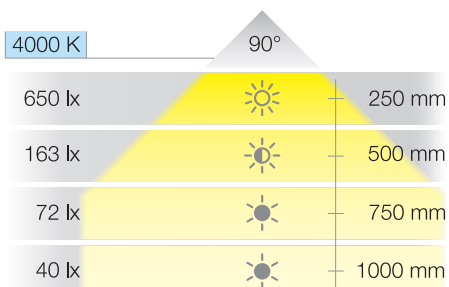


12V **5 12V** Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Voltage	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Finish/colour	Cat. No.
12V	82	1.65	Black	833.74.153
			Chrome plated	833.74.152

Flexible surface mounted lights

Monochrome

Häfele Loox LED 2018




- > Not dimmable
- > Version: With integrated rotary switch on light head
- > Material: Aluminium, silver coloured anodized
- > Diameter: 32 mm
- > Energy efficiency class: A
- > Degree of protection: IP20
- > Number of LEDs: 1
- > Colour temperature: 3000 K
- > Wattage: 2 W
- > Luminous flux: 89 lm
- > Luminous efficacy: 45 lm/W
- > Mounting: Surface mounted or recess mounted
- > Drill hole Ø: 35 mm
- > Supplied with: 1 LED light with 2 m lead, including fixing materials




Surface mounted




Recess mounted



Surface mounted



Recess mounted

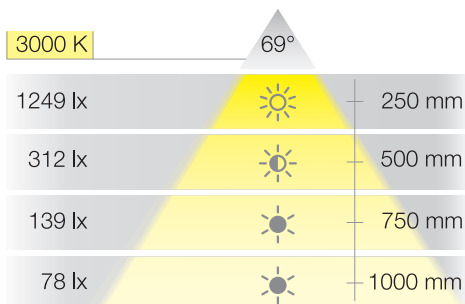


12V 5 12V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Voltage	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Length mm	Installation	Cat. No.
12V	81	2.20	545.5	Surface mounted	833.74.100
			526	Recessed	833.74.110



Flexible surface mounted lights

Monochrome


Häfele Loox LED 3018



- > Dimmable: Yes
- > Version: With integrated dimmer on light head
- > Material: Plastic, silver coloured
- > Dimensions (Ø x L): 60 x 520 mm
- > Energy efficiency class: A
- > Degree of protection: IP20
- > Number of LEDs: 30
- > Colour temperature: 4000 K
- > Wattage: 2.8 W
- > Luminous flux: 165 lm
- > Luminous efficacy: 59 lm/W
- > Supplied with: 1 LED light with 2 m lead, including fixing materials



24 V **5 24 V** Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.

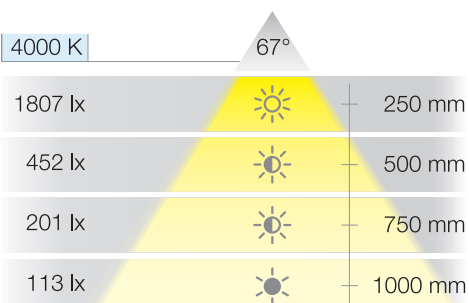

Voltage	Colour rendering index CRI	Weighted energy consumption kWh/1000 h	Installation	Cat. No.
24 V	R_a			
	80	3.03	Surface mounted	833.77.001
			Recessed	833.77.000

LOOX 2019, HDE-en, 02/20; Dimensional data not binding. We reserve the right to alter specifications without notice.

Recess/surface mounted downlights


Monochrome, drill hole Ø: 60 mm



Häfele Loox LED 3010



- > Dimmable: Yes
- > Version: With frosted and clear glass cover for individual replacement
- > Material: Aluminium, silver coloured anodized
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 1
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 60 mm
- > Supplied with: 1 light with 1 glass pane clear/matt, 2 m lead incl. fixing material

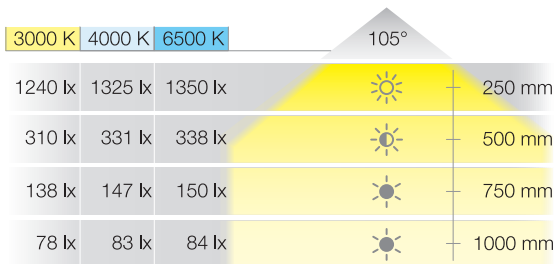

24 V **5 24 V** Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.




Note
When switching on the light, the power consumption briefly rises to 5 W per light.
Please note when selecting the driver and controls!

Voltage V	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Cat. No.
24 V	3000	3.25	250	77	82	3.58	833.75.040
	4000	3.25	267	82	84	3.58	833.75.041
	6000	3.25	271	83	83	3.58	833.75.042

Häfele Loox LED 3010



Downlight housing

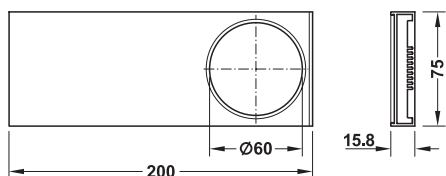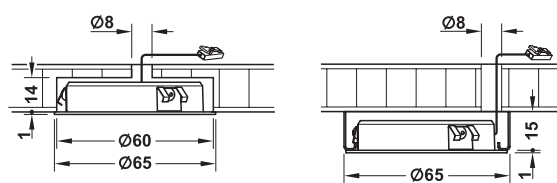

> Downlight housing, silver coloured

Downlight housing, silver coloured	Cat. No. 833.77.730
------------------------------------	--------------------------------------

> Downlight housing, silver coloured


Downlight housing, silver coloured	Cat. No. 833.77.731
------------------------------------	--------------------------------------

Recess mounted downlights


Monochrome, drill hole Ø: 180 mm



Häfele Loox LED 3022

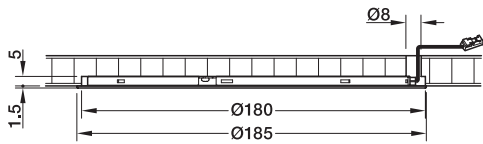

- > Dimmable: Yes
- > Material: Plastic, silver coloured
- > Energy efficiency class: A++
- > Degree of protection: IP20
- > Number of LEDs: 77
- > Mounting: For recess mounting
- > Drill hole Ø: 180 mm
- > Supplied with: 1 light with 2 m lead, including fixing materials

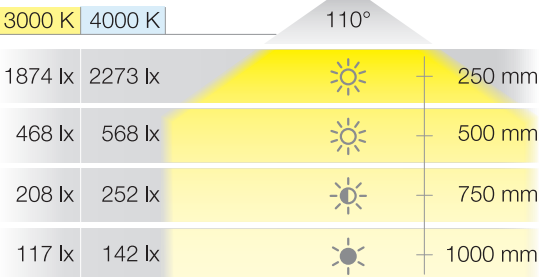

24V **5 24V** Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.

Voltage V	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Cat. No.
24 V	3000	4.8	362	75	82	5.50	833.75.100
	4000	4.8	408	85	82	5.50	833.75.101


Surface mounted downlights

Monochrome, Ø 180 mm


Häfele Loox LED 3023



EXTRA SLIM



- > Dimmable: Yes
- > Material: Plastic, silver coloured
- > Height: 6.2 mm
- > Energy efficiency class: A++
- > Degree of protection: IP20
- > Number of LEDs: 77
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

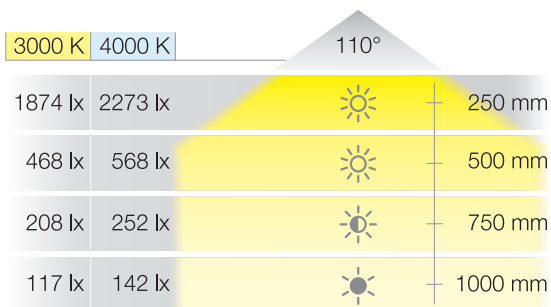

24V 524V Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.

Voltage V	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Cat. No.
24 V	3000	4.8	362	75	82	5.50	833.77.130
	4000	4.8	408	85	82	5.50	833.77.131


LOOX:2019, HDE-en, 02/20; Dimensional data not binding. We reserve the right to alter specifications without notice.

Recess mounted downlights


Monochrome, 210 x 210 mm



Häfele Loox LED 3024

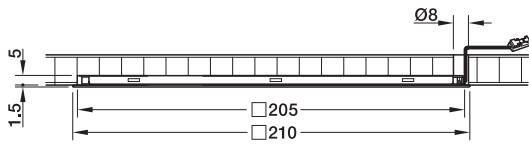

- > Dimmable: Yes
- > Material: Plastic, silver coloured
- > Length x width: 210 x 210 mm
- > Energy efficiency class: A++
- > Degree of protection: IP20
- > Number of LEDs: 70
- > Mounting: For recess mounting
- > Cut-out size: 205 x 205 mm
- > Supplied with: 1 light with 2 m lead, including fixing materials

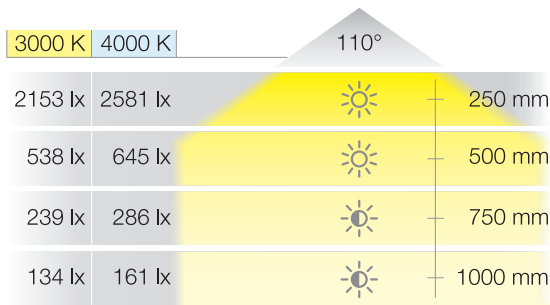

24V 5 24V Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.

Voltage V	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Cat. No.
24V	3000	5.8	430	74	82	7.15	833.75.090
	4000	5.8	530	91	82	7.15	833.75.091

Surface mounted downlights

Monochrome, 205 x 205 mm

ILLUMINATING



EXTENDING



SWITCHING



NETWORKING



DISTRIBUTING




SUPPLYING




Häfele Loox LED 3025



EXTRA SLIM

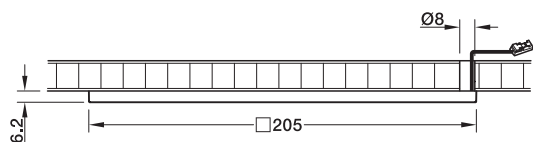

- > Dimmable: Yes
- > Material: Plastic, silver coloured
- > Length x width: 205 x 205 mm
- > Height: 6.2 mm
- > Energy efficiency class: A++
- > Degree of protection: IP20
- > Number of LEDs: 70
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

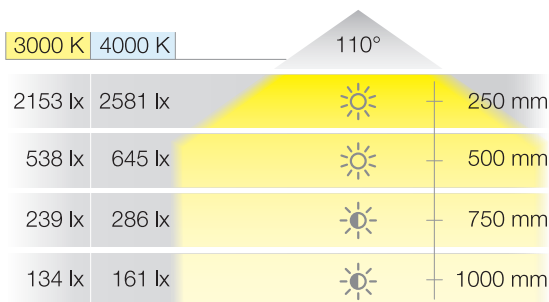

24V **5 24V** Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI	Weighted energy consumption	Cat. No.
V	K	W	lm	lm/W	R _a	kWh/1000 h	
24V	3000	5.8	430	74	82	7.15	833.77.120
	4000	5.8	530	91	82	7.15	833.77.121

LOOX:2019, HDE-en, 02/20; Dimensional data not binding. We reserve the right to alter specifications without notice.

Surface mounted downlights


Monochrome, Ø 65 mm



Häfele Loox LED 3035



EXTRA SLIM
6 mm



- > Dimmable: Yes
- > Material: Plastic, silver coloured
- > Diameter: 65 mm
- > Height: 6 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 8
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

3000 K	4000 K	115°	
650 lx	700 lx		250 mm
165 lx	180 lx		500 mm
75 lx	80 lx		750 mm
40 lx	45 lx		1000 mm

24 V **5 24 V** Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.

12 V Also available as 12 V light, see page 58

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI	Weighted energy consumption	Cat. No.
V	K	W	lm	lm/W	R _a	kWh/1000 h	
24 V	3000	2.5	170	68	90	2.75	833.77.190
	4000	2.5	180	72	90	2.75	833.77.191


Surface mounted downlights

Monochrome, 65 x 65 mm

Häfele Loox LED 3036



EXTRA SLIM
6 mm



- > Dimmable: Yes
- > Material: Plastic, silver coloured
- > Length x width: 65 x 65 mm
- > Height: 6 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 8
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

3000 K	4000 K	115°		
750 lx	800 lx		250 mm	
190 lx	210 lx		500 mm	
85 lx	90 lx		750 mm	
50 lx	50 lx		1000 mm	

Loox5 24 V driver see page 122
Please order 6-piece adapter set 833.77.838 separately.

Also available as 12 V light, see page 59

Also available as RGB light (12 V or 24 V), see page 78


Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI	Weighted energy consumption	Cat. No.
V	K	W	lm	lm/W	R _a	kWh/1000 h	
24 V	3000	2.5	190	76	90	2.75	833.77.180
	4000	2.5	200	80	90	2.75	833.77.181

Recess/surface mounted downlights


Monochrome, drill hole Ø: 58 mm



Häfele Loox LED 4009

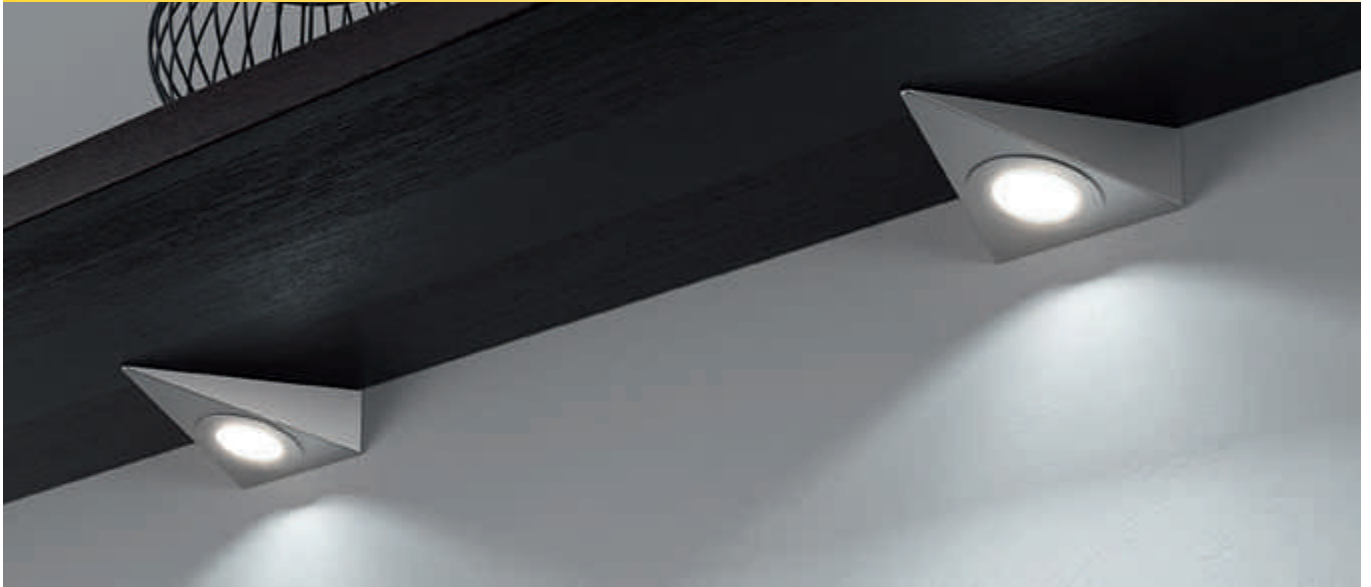

- > Dimmable: Yes
- > Version: Metal housing
- > Material: Aluminium
- > Energy efficiency class: A
- > Degree of protection: IP20
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole, for clamp fixing or for screw fixing
- > Drill hole Ø: 58 mm
- > Supplied with: 1 light with 2 m lead

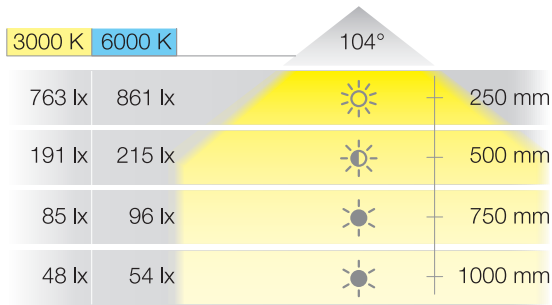


350 mA Loox 350 mA driver see page 124


Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Black anodized	Nickel coloured anodized
V	K	W	lm	lm/W				
350 mA	3000	3.9	160	41	82	3.30	833.78.142	833.78.140
	6000	3.9	176	45	82	3.30	833.78.154	833.78.151




Häfele Loox LED 4009



Recess mounting



Mounting as downlight

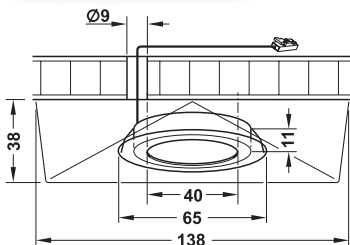


For mounting as downlight with triangular housing



- > Downlight housing
Dimensions (Ø x H): 65 x 16 mm

Colour	Cat. No.
Black anodized	833.80.712
Nickel coloured anodized	833.80.710



- > Triangular downlight housing
Dimensions (L x W x H): 121 x 125 x 44 mm

Colour	Cat. No.
Black anodized	833.80.713
Nickel coloured anodized	833.80.711




Surface mounted downlights

Spotlight monochrome, corner mounting



Häfele Loox LED 4013



- > Dimmable: Yes
- > Version: Space saving and inconspicuous
- > Material: Aluminium
- > Length x width: 33 x 22 mm
- > Height: 42 mm
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 1
- > Mounting: For glue fixing or screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials

4000 K	6000 K	21°	
2500 lx	2800 lx		250 mm
1500 lx	1600 lx		500 mm
500 lx	585 lx		750 mm
150 lx	287 lx		1000 mm


350 mA Loox 350 mA driver see page 124

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI R _a	Weighted energy consumption kWh/1000 h	Black	Silver coloured anodized
V	K	W	lm	lm/W				
350 mA	4000	1	64	64	87	1.10	833.79.062	833.79.060
	6000	1	71	71	85	1.10	833.79.063	833.79.061

Surface mounted lights

Spotlight monochrome, post light

Häfele Loox LED 4011

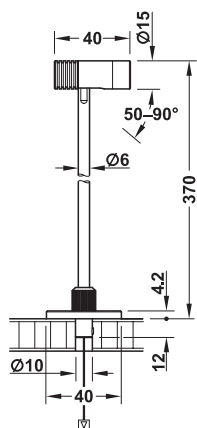

- > Dimmable: Yes
- > Version: Swivelling light head
With height adjustment
(bar can be lowered into the cabinet)
- > Material: Aluminium and steel, black
- > Diameter: Post: 6 mm
- > Length: 370 mm
- > Energy efficiency class: A++
- > Degree of protection: IP20
- > Number of LEDs: 1
- > Mounting: For recess mounting
- > Supplied with: 1 light with 2 m lead,
including fixing materials

4000 K	6000 K	13°	
11250 lx	13070 lx		250 mm
2810 lx	3270 lx		500 mm
1250 lx	1450 lx		750 mm
700 lx	820 lx		1000 mm

350 mA Loox 350 mA driver see page 124

Voltage	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI	Weighted energy consumption	Cat. No.
V	K	W	lm	lm/W	R _a	kWh/1000 h	
350 mA	4000	1	69	69	80	1.10	833.80.000
	6000	1	97	97	80	1.10	833.80.001


Surface mounted downlights

RGB, 65 x 65 mm



Häfele Loox5 LED 2081 / 3081




EXTRA SLIM
6 mm



- > Material: Plastic
- > Length x width: 65 x 65 mm
- > Height: 6 mm
- > Degree of protection: IP20
- > Refraction angle: 115°
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2 m lead, including fixing materials


-  **5 12V** Loox5 12 V driver see page 121
-  **5 24V** Loox5 24 V driver see page 122

 Colour control only via 6-way distributor Häfele Connect Mesh with RGB adapter and remote control or smartphone. Please order separately, see chapter Networking, page 96



Häfele Loox5 LED 2081 / 3081


Colour mixing



RGB lights

- > Mix any combination of intensive light colours
- > Creative decorative effects
- > Create an invigorating or relaxing atmosphere

Voltage V	Number of LEDs	Colour temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Weighted energy consumption kWh/1000 h	Cat. No.
5 12 V	Häfele Loox5 LED 2081						
	6	RGB	0.7	20	29	0.77	833.74.127
5 24 V	Häfele Loox5 LED 3081						
	6	RGB	0.7	20	29	0.77	833.77.230


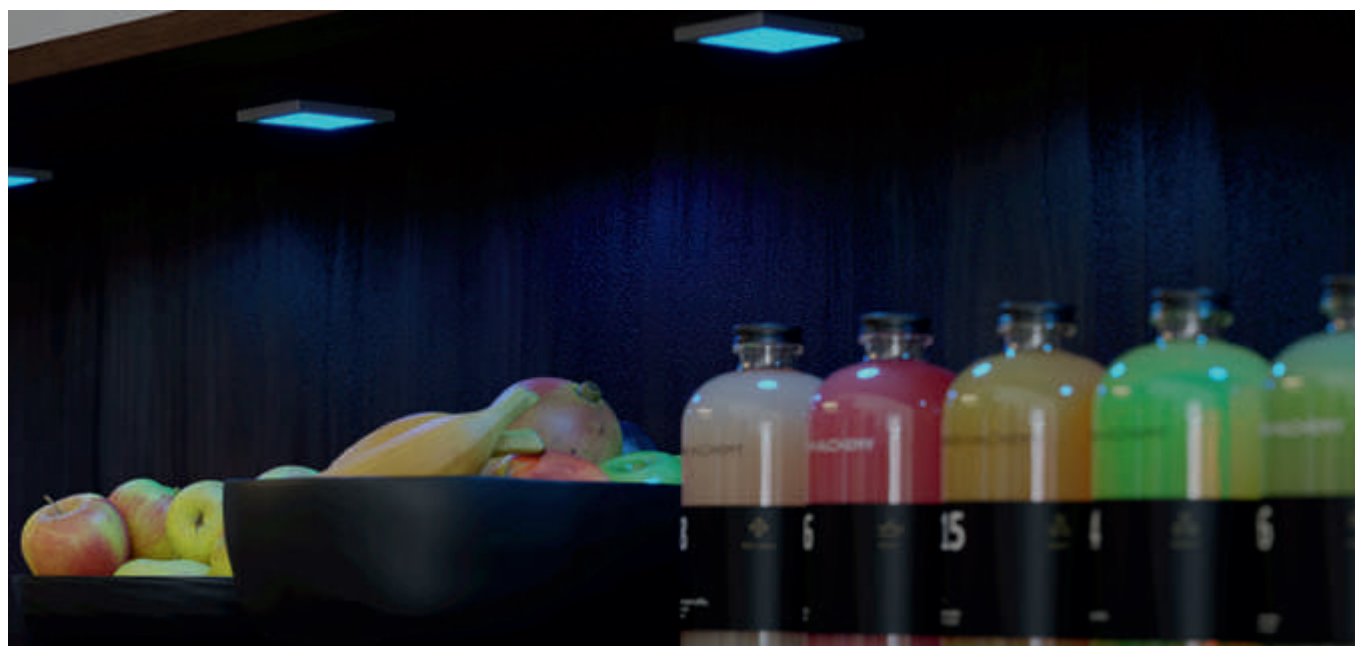


Surface mounted downlights

Battery-operated light, monochrome, Ø 100 mm



Häfele Loox LED 9003

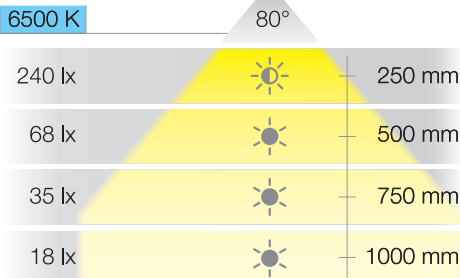

- > Version: With integrated motion detector with built-in rechargeable lithium-ion battery, capacity: 1100 mAh
- > Material: Plastic, silver coloured
- > Diameter: 100 mm
- > Height: 17 mm
- > Energy efficiency class: A++
- > Degree of protection: IP20
- > Number of LEDs: 3
- > Sensor range: 0–2000 mm
- > Sensor angle: 120°
- > Delay time: 30 sec.
- > Operating time: 10 hrs.
- > Charging time: 3–4 hrs.
- > Mounting: Magnetic mounting plate for screw fixing
- > Supplied with: 1 light with magnetic mounting plate and 0.8 m mini-USB charging cable

The light can be recharged using the supplied mini-USB cable


Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index	Cat. No.
K	W	lm	lm/W	CRI R _a	
6500	0.6	30	50	80	833.87.012

Surface mounted downlights


Battery-operated light, monochrome, 120 x 65 mm




Häfele Loox LED 9004



- > Version: With motion detector with built-in rechargeable lithium-ion battery
- > Material: Plastic, silver coloured
- > Length x width: 120 x 65 mm
- > Height: 17 mm
- > Energy efficiency class: A++
- > Degree of protection: IP20
- > Number of LEDs: 8
- > Sensor range: 0–2000 mm
- > Sensor angle: 120°
- > Delay time: 30 sec.
- > Operating time: 8 hrs.
- > Charging time: 3 hrs.
- > Two operating modes: Motion: permanently active motion detector
Auto: motion detector active with residual brightness of <5 lx
- > Mounting: Mounting plate for screw fixing; light for sliding on
- > Supplied with: 1 light with mounting plate for screw fixing and 0.8 m micro-USB cable

 The light can be recharged using the supplied micro-USB cable

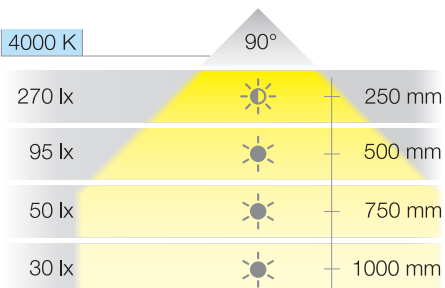

Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index	Cat. No.
K	W	lm	lm/W	CRI R _a	
4000	0.8	55	69	>90	833.87.021

Extending

ILLUMINATING

EXTENDING

SWITCHING

NETWORKING

DISTRIBUTING

SUPPLYING


Charging stations

- ESC 2002 inductive charging station > Page 83
- ESC 2001 USB charging station, modular > Page 83




Sound systems

- 105 sound system > Page 84
- 420 E sound system, exciter speakers > Page 85

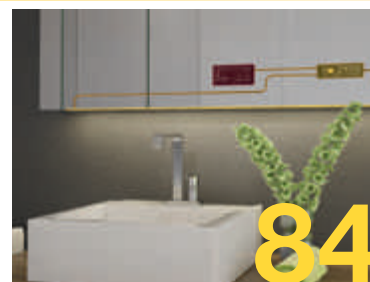

Charging stations

Häfele Loox ESC 2002 inductive charging station – for 12 V system

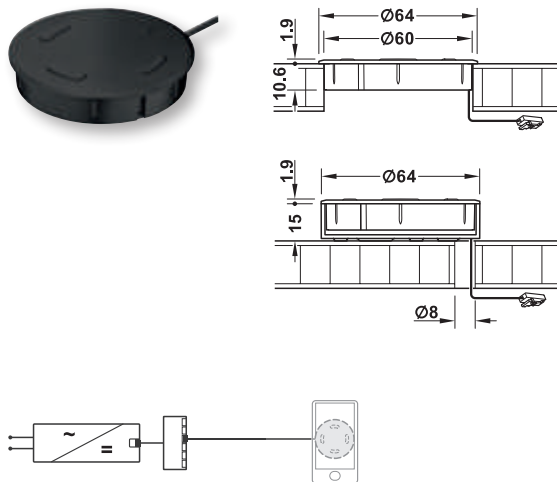


- > Material/colour: Plastic, matt black
- > Diameter: 64
- > Charging current: 1 A
- > Output voltage: 5 V
- > Standby power consumption: 0.3 W
- > Power consumption: Max. 10 W
- > Standard: WPC compatible
- > Supplied with: 1 inductive charging station with mounting ring and 2 m lead

Voltage V		Cat. No.
12 V	ESC 2002 inductive charging station	833.73.776

⚠ Drill hole Ø for plug: 8 mm

🔌 12 V 5 12 V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

Häfele Loox ESC 2001 USB charging station, modular – for 12 V system

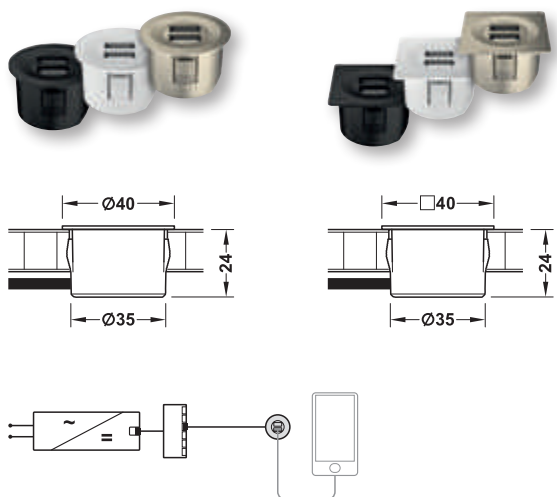

- > Material: Plastic, matt
- > Output voltage: 5 V
- > Output current: 2 A
- > Power consumption: Max. 15 W
- > Drill hole Ø: 35 mm
- > Mounting: For mounting in drilled hole, for clamp fixing
- > Supplied with: 1 USB charging station

Colour	Round	Straight-edged
Black	833.73.751	833.73.754
Nickel plated	833.73.753	833.73.756
White	833.73.752	833.73.755

+ Lead with snap-in connector

Type of cable	Voltage	Length mm	Cat. No.
Monochrome (2-wire 24 AWG)	5 12 V	1000	833.95.789
		2000	833.95.788

⚠ Please order lead separately.

🔌 5 12 V Loox5 12 V driver see page 121

Sound systems



ILLUMINATING

EXTENDING

SWITCHING

NETWORKING

DISTRIBUTING

SUPPLYING

105 sound system




- > Material/finish: Plastic, black
- > Dim. (L x W x H): 140 x 66 x 25 mm
- > Power consumption: Operation: 7 W, standby: <0.3 W
- > Music wattage: 5 W (RMS)
- > Reception range: Max. 10 m
- > Mounting: For screw fixing
- > Supplied with: 1 Bluetooth® receiver and 2 m lead

Voltage V		Straight-edged
12 V	105 sound system (Mono with integrated exciter speaker)	822.65.001

! Please observe the installation regulations for bathrooms!

12V 5 12V Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.



- ① Sound system
- ② 3-way distributor with switching function

Sound systems



ILLUMINATING



EXTENDING



SWITCHING



NETWORKING



DISTRIBUTING




SUPPLYING



420 E sound system, exciter speakers



> App for individual settings available on request



- ① Sound system
- ② Exciter speaker
- ③ 3-way distributor with switching function

- > Material/finish: Plastic, black
- > Dim. (L x W x H): 140 x 45 x 15 mm
- > Power consumption: Operation with 2 exciter speakers: Max. 19 W, operation with 4 exciter speakers: Max. 32 W, standby: <0.3 W
- > Music wattage: Operation with 2 or 4 exciter speakers: 2 x 10 W (RMS)
- > Reception range: Max. 10 m
- > Mounting: For screw fixing
- > Supplied with: 1 Bluetooth® receiver with 2 m lead and 4 connections for exciter speakers, incl. 2 exciter speakers

Voltage V	Cat. No.
12 V	420 E sound system (stereo and 2 exciter speakers) 822.65.034

⚠ Please observe the installation regulations for bathrooms!
Can be installed on glass and mirror glass (3–6 mm each), acrylic glass (3 mm), chipboard (10–20 mm) and mineral composite boards.

⚡ **12 V 5 12 V** Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

- ⊕ **Exciter speaker**
- > Dimensions: Ø 65 x 22 mm
- > Wattage: Rated/music load capacity 4/15 W
- > Mounting: For screw fixing or for glue fixing
- > Supplied with: 1 exciter speaker with 1 m speaker lead

Cat. No.
Exciter speaker (wattage with 12 V plug system) 822.65.039

⊕ Please order extension lead 2 m 833.73.766 for exciter speaker separately.

Switching


Sensor switches

- Sensor switch > Page 87
- Door sensor switch > Page 87
- Motion detector > Page 87
- Dimmer > Page 88
- Captive switch/dimmer > Page 88
- Sensor switch, surface mounted > Page 89
- Door sensor switch, surface mounted > Page 89
- Dimmer, surface mounted > Page 89



Sensor switch for aluminium profiles

- Dimmer > Page 90
- Motion detector > Page 90



Mechanical switches

- Universal door contact switch > Page 91
- Door contact switch > Page 91
- Push switch > Page 91
- Rocker switch > Page 92
- Foot switch > Page 92
- Housing for switch, surface mounted > Page 92



Dimmer interface

- Dimmer interface 1–10 V, modular > Page 93



Multi switch box, multi driver box

- Multi switch box > Page 94
- Multi driver box > Page 95




Symbol overview

<p>Sensor switch Touchless, soft on/off switching</p>	
<p>Door sensor switch Soft on/off switching</p>	
<p>Motion detector Automatic on/off switching</p>	
<p>Dimmer Soft on/off switching and dimming</p>	
<p>Captive switch/dimmer Touchless on/off switching and dimming</p>	
<p>Universal door contact switch On/off switching</p>	
<p>Door contact switch On/off switching, door closed = light off, door open = light on</p>	
<p>Push switch On/off switching</p>	
<p>Rocker switch On/off switching</p>	
<p>Foot switch On/off switching</p>	

Sensor switches

Häfele Loox sensor switch, modular – touchless, soft on/off switching

TOUCHLESS




- > Material/colour: Plastic, silver coloured
- > Degree of protection: IP20
- > Sensor range: 0–80 mm
- > Power consumption: ≤ 0.3 W
- > Drill hole \varnothing : 12 mm
- > Supplied with: 1 switch

	Cat. No.
Sensor switch, modular	833.89.127

- Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142. See page 91

- On/off state is stored without the need for power supply (memory function).

Häfele Loox door sensor switch, modular – soft on/off switching




- > Material/colour: Plastic, silver coloured
- > Degree of protection: IP20
- > Sensor range: 0–100 mm
- > Power consumption: ≤ 0.3 W
- > Drill hole \varnothing : 12 mm
- > Supplied with: 1 switch

	Cat. No.
Door sensor switch, modular	833.89.128

- Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142. See page 91

Häfele Loox motion detector, modular – automatic on/off switching



- > Material/colour: Plastic, silver coloured
- > Degree of protection: IP20
- > Sensor range: 0–3000 mm
- > Sensor angle: 120 °
- > Power consumption: ≤ 0.1 W
- > Delay time: 30 sec.
- > Drill hole \varnothing : 12 mm
- > Supplied with: 1 motion detector



	Cat. No.
Motion detector, modular	833.89.129

- Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142. See page 91

Sensor switches

Häfele Loox dimmer, modular – automatic on/off switching

WITH TOUCH/
TOUCHLESS



- > Material/colour: Plastic, silver coloured
- > Degree of protection: IP20
- > Power consumption: ≤0.3 W
- > Drill hole Ø: 12 mm
- > Supplied with: 1 dimmer

	Sensor range	Cat. No.
With touch	–	833.89.058
Touchless	0–60 mm	833.89.126


+ Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142. See page 91

! Dimming value is stored without the need for voltage supply (memory function)

Häfele Loox capacitive switch/dimmer, modular – touchless on/off switching and dimming



This completely invisible operating solution opens up completely new possibilities in continuously adjustable light control.

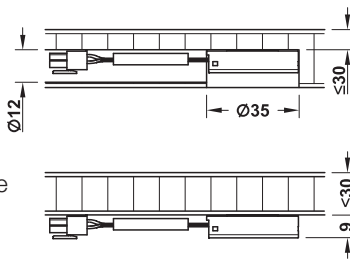

- > Manual operation (proximity sensor), memory function
- > Concealed installation in wood, glass or stone (not in metalliferous materials) at a maximum depth of 30 mm
- > For screw fixing or recess mounting (drill hole Ø 35 mm)
- > A distance of min. 500 mm to electromagnetic fields (power lines, microwave) must be adhered to.

- > Material/colour: Plastic, silver coloured
- > Diameter: 35 mm
- > Height: 10 mm
- > Degree of protection: IP20
- > Power consumption: ≤1 W
- > Supplied with: 1 switch



	Cat. No.
Capacitive switch/dimmer, modular	833.89.133

+ Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142. See page 91

Sensor switches

Häfele Loox Sensor switch, surface mounted modular – touchless, soft on/off switching

TOUCHLESS





- > Material/colour: Plastic, silver coloured
- > Dim. (L x W x H): 40 x 40 x 8.5 mm
- > Degree of protection: IP20
- > Sensor range: 0–80 mm
- > Power consumption: ≤0.3 W
- > Supplied with: 1 switch with fixing material

	Cat. No.
Sensor switch, surface mounted modular	833.89.136

+ Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142. See page 91

! On/off state is stored without the need for power supply (memory function).

Häfele Loox Door sensor switch, surface mounted modular – soft on/off switching







- > Material/colour: Plastic, silver coloured
- > Dim. (L x W x H): 40 x 40 x 8.5 mm
- > Degree of protection: IP20
- > Sensor range: 0–100 mm
- > Power consumption: ≤0.3 W
- > Supplied with: 1 switch with fixing material

	Cat. No.
Door sensor switch, surface mounted	833.89.137

+ Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142. See page 91

Häfele Loox Dimmer, surface mounted modular – soft on/off switching and dimming

WITH TOUCH/
TOUCHLESS



- > Material/colour: Plastic, silver coloured
- > Dim. (L x W x H): 40 x 40 x 8.5 mm
- > Degree of protection: IP20
- > Sensor range: 0–100 mm
- > Power consumption: ≤0.3 W
- > Supplied with: 1 switch with fixing material

	Sensor range	Cat. No.
With touch	–	833.89.134
Touchless	0–80 mm	833.89.135



+ Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142. See page 91

! Dimming value is stored without the need for voltage supply (memory function)

Sensor switches

For monochrome 8 mm LED strip lights in aluminium profiles

Loox5 aluminium profile dimmer – soft on/off switching with dimming

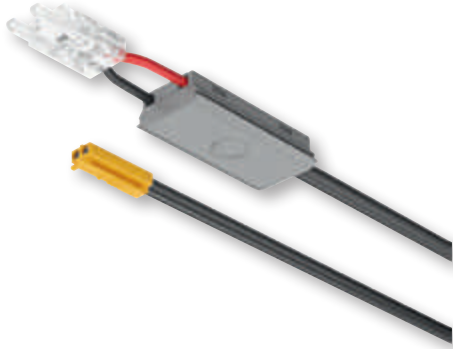



- > Area of application: For monochrome 8 mm Loox5 LED strip lights in aluminium profiles with 16 mm internal width
- > Material/colour: Plastic, silver coloured
- > Drill hole Ø: Plug 8 mm
- > Mounting: For push fitting into aluminium profile
- > Supplied with: 1 switch with clip/plug and 2 m lead

Voltage	Max. connected wattage W	Cat. No.
5 12V	60	833.95.751
5 24V	90	833.77.836

! Dimming value is stored without the need for voltage supply (memory function)

➔ Aluminium profile with 16 mm internal width see page 22 and page 28

Loox5 aluminium profile motion detector – automatic on/off switching

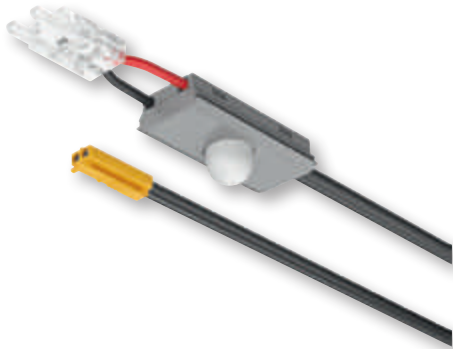


- > Area of application: For monochrome 8 mm Loox5 LED strip lights in aluminium profiles with 16 mm internal width.
- > Material/colour: Plastic, silver coloured
- > Drill hole Ø: Plug 8 mm
- > Mounting: For push fitting into aluminium profile
- > Sensor range: 0–3000 mm
- > Delay time: 30 sec.
- > Supplied with: 1 switch with clip/plug and 2 m lead

Voltage	Max. connected wattage W	Cat. No.
5 12V	60	833.95.750
5 24V	90	833.77.835

➔ Aluminium profile with 16 mm internal width see page 22 and page 28

Mechanical switches

Häfele Loox universal door contact switch, modular – on/off switching

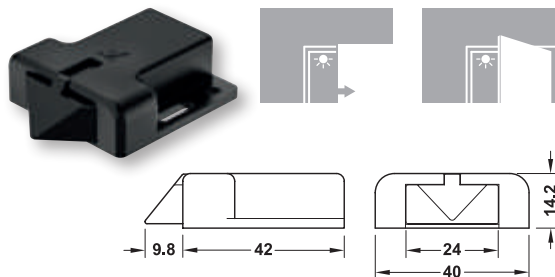

The universal door contact switch is suitable for hinged doors or single-leaf sliding doors.

- > Material/colour: Plastic, black
- > Degree of protection: IP20
- > Supplied with: 1 switch with fixing material

Length x width mm	Height mm	Cat. No.
51.8 x 40	14.2	833.89.143

- + Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142.

Häfele Loox lead with snap-in connector for modular switches




- > Degree of protection: IP20
- > Supplied with: 1 lead

Material/colour:	Length mm	Cat. No.
Plastic, black	500 mm	833.89.140
	1000 mm	833.89.141
	2000 mm	833.89.142

- + Required for modular switches

- ! Drill hole Ø for plug: 12 mm

Häfele Loox door contact switch – on/off switching

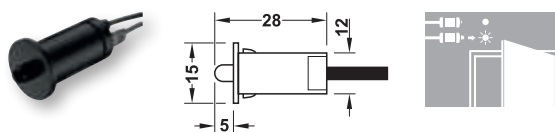


- > Degree of protection: IP20
- > Drill hole Ø: 12 mm
- > Supplied with: 1 switch with 2 m lead

Material/colour	Length mm	Cat. No.
Plastic, black	28	833.89.059

- ! Drill hole Ø for plug: 12 mm

Häfele Loox push switch – on/off switching

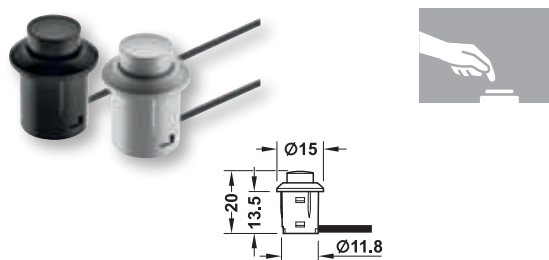


- > Drill hole Ø: 12 mm
- > Supplied with: 1 switch with 2 m lead

Material/colour:	Length mm	Cat. No.
Plastic, black	20	833.89.108
Plastic, grey		833.89.107

- ! Drill hole Ø for plug: 12 mm

Mechanical switches

Häfele Loox rocker switch – on/off switching




- > Material/colour: Plastic, black
- > Diameter: 15 mm
- > Height: 17.7 mm
- > Drill hole Ø: 12 mm
- > Supplied with: 1 switch with 2 m lead

	Cat. No.
Rocker switch	833.89.106

! Drill hole Ø for plug: 12 mm

Häfele Loox foot switch – on/off switching

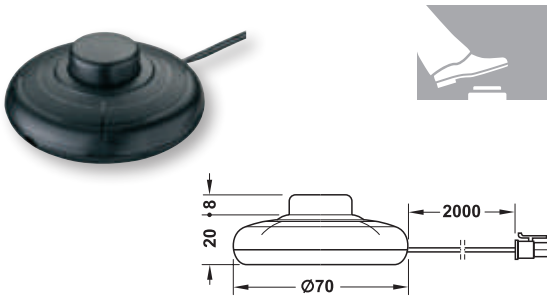


- > Material/colour: Plastic, black
- > Diameter: 70 mm
- > Height: 28 mm
- > Degree of protection: IP20
- > Supplied with: 1 switch with 2 m lead

	Cat. No.
Foot switch	833.89.046

! Drill hole Ø for plug: 12 mm

Housing for switch, surface mounted

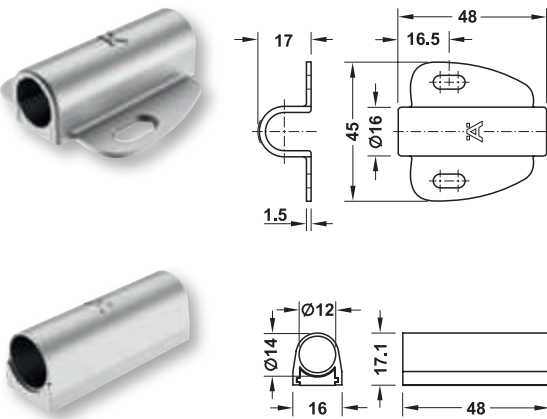


- > Material/colour: Plastic, silver coloured
- > Supplied with: 1 housing
- > Application: For switch Ø 12 mm

Ø mm	Dim. (L x W x H) mm	Cat. No.
16	48 x 45 x 17	833.89.090
14	48 x 16 x 17.1	833.89.092


! Suitable for 32 mm series drilled holes

Dimmer interface

Häfele Loox dimmer interface 1–10 V, modular – for 12 V and 24 V systems



Installation example: Wall dimmer with 1–10 V control output. No connection of the dimmer to mains voltage!

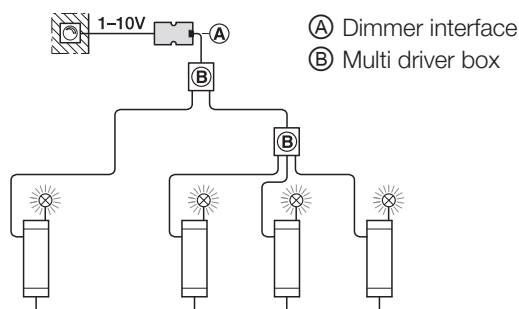

Installation example: Multi driver boxes for controlling several drivers (12 V, 24 V) or distributors with switching function. No connection of the dimmer to mains voltage!



Design advantage

> Wall dimmers can be used for the control of furniture lights in the design of the house installation

- > Length x width: 68.9 x 34.7 mm
- > Height: 13.5 mm
- > Degree of protection: IP20
- > Supplied with: 1 dimmer interface

	Cat. No.
Dimmer interface 1–10 V, modular	833.89.144

! Use dimmer only, if monochrome lights are connected. Not suitable for the connection of converters or control devices. Direct connection to a normal household dimmer with a 1–10 V control output and connection via a lead with snap-in connector for modular switches to the switching input of a 12 V or 24 V Loox driver or a distributor. Please order lead with snap-in connector for modular switches driver separately.


+ Lead with snap-in connector for modular switches

Length mm	Cat. No.
500	833.89.140
1000	833.89.141
2000	833.89.142

! Drill hole Ø for plug: 12 mm

Multi switch box

Häfele Loox multi switch box



- (A) Switch
- (B) Multi switch box
- (C) Driver

1 LED driver operated by up to 3 switches. Allows the LED driver or distributor with switching function to be switched on and off from different positions.



Häfele Loox extension lead for switches



- > Function:
 - 2 operating modes can be selected using an integrated toggle switch.
 - Cross circuit:** On/off switching at different switches
 - Deactivated cross circuit:** Switching on with switch 1, 2 or 3. For switching off, all switches that were switched on have to be activated again
- > Material/colour: Plastic, black
- > Length x width: 55 x 45 mm
- > Height: 16 mm
- > Degree of protection: IP20
- > Supplied with: 1 multi switch box
With 1 m lead for switch

Standby power consumption W	Cat. No.
≤0.3	833.89.066

+ Lead from multi boxes to switching input

Length mm	Supplied with	Cat. No.
500	1 lead	833.89.068
2000	1 lead	833.89.069



! Cannot be used in combination with dimmer 833.89.043
 Drill hole Ø for plug: 12 mm
 Alternative to the supplied 1 m lead
 For multi switch box.
 The drill hole Ø for the male plug and the female socket of the switch leads is 12 mm.

	Cat. No.
Extension lead for switch	833.89.067

! Drill hole Ø for plug: 12 mm
 Can also be used for the multi switch box and the multi driver box.
 The maximum lead length of a switch is 6 m.
 The drill hole Ø for the male plug and the female socket of the switch leads is 12 mm.

Multi driver box

Häfele Loox multi driver box

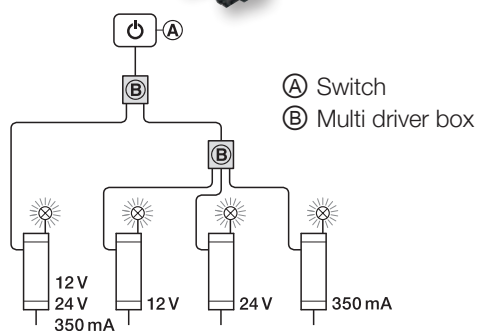

Up to 3 LED drivers with different voltages or distributors with a switching function can be controlled with 1 switch.

Several lights in the room can be switched on and off with one switch.

These can also be 3 of the same driver if you require additional power in a 12 V system, for example.



Häfele Loox extension lead for switches



- > Finish: Plastic, black
- > Length x width: 50 x 40 mm
- > Height: 19 mm
- > Supplied with: 1 multi driver box with 3 x 1 m lead for switch

Standby power consumption W	Cat. No.
1.5 W	833.89.061

! Max. 3 x 75 W per multi driver box.

+ Lead for multi boxes to switching input

Length mm	Supplied with	Cat. No.
500	1 lead	833.89.068
2000	1 lead	833.89.069

! Drill hole Ø for plug: 12 mm

Alternative to the supplied three 1 m leads for multi driver box.

The drill hole Ø for the male plug and the female socket of the switch leads is 12 mm.

Networking

ILLUMINATING

EXTENDING

SWITCHING

NETWORKING

DISTRIBUTING

SUPPLYING

Häfele Connect Mesh 6-way distributor

6-way distributor

> Page 98



98


Häfele Loox5 adapters

Multi-white adapter

> Page 99

RGB adapter

> Page 99

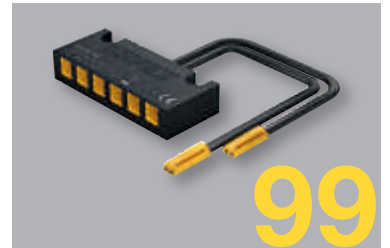

99

Häfele Connect Mesh remote controls

Remote control

> Page 100

Push button, wall mounted

> Page 100



100

Häfele Connect Mesh interface

2-channel interface

> Page 101



101


Networking

Häfele Connect Mesh

Häfele Connect Mesh consists of components for the smart control of lights and electrically operated fittings in furniture – with optional integration of the electrical installation of buildings. Mesh means networking, and it uses the Bluetooth® Mesh network technology by the Bluetooth® Special Interest Group, which has the potential to become the global smart building standard.

The advantages are:

- > Scalable: From the simple remote control of a furniture light to complex concepts in hotels or store fixtures
- > Fail-safe: All nodes in the network forward control information
- > Protected: Individual network key on your personal mobile device
- > Standardised: Bluetooth® is a globally accepted and widely used technology

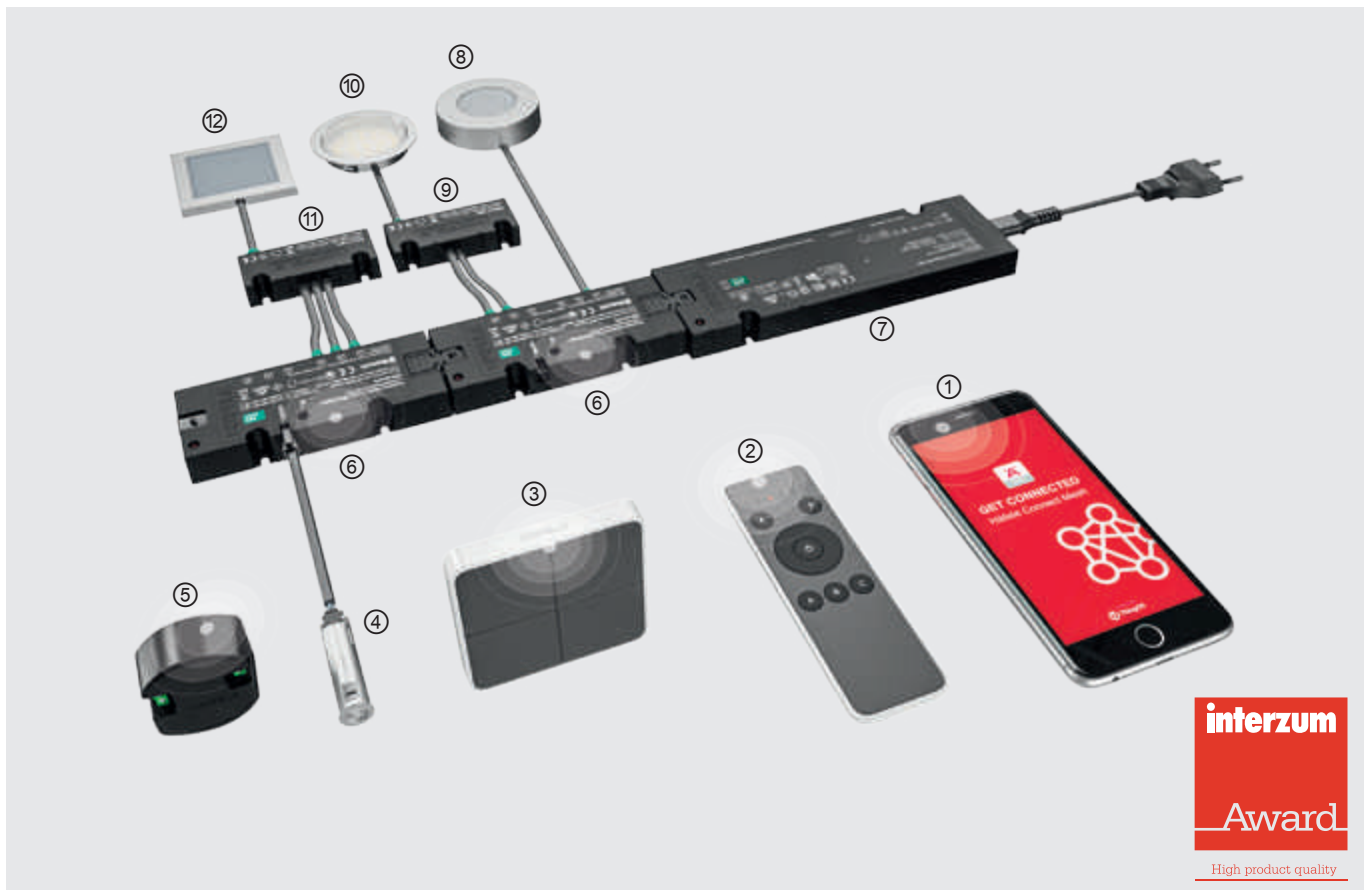

Häfele Connect Mesh active components

> Sensor

- ① Mobile device with Häfele Connect app
- ② Remote control
- ③ Push button, wall mounted
- ④ Loox switch (switching function programmable via app)

> Actuator and sensor

- ⑤ 2-channel interface: 2 switching input ports (switching function programmable via app) Output port 80–230 V
- ⑥ Häfele Connect Mesh 6-way distributor

Passive components without networking function

- ⑦ Driver
- ⑧ Monochrome light or electrically operated fitting
- ⑨ Multi-white adapter
- ⑩ Multi-white light
- ⑪ RGB adapter
- ⑫ RGB light

LOOX:2019, HfE-en, 02/20; Dimensional data not binding. We reserve the right to alter specifications without notice.

ILLUMINATING

EXTENDING

SWITCHING

NETWORKING


DISTRIBUTING

SUPPLYING

Distributor


Häfele Connect Mesh 6-way distributor, with switching function

- > Control several light colours on one box!
- > Each output port can be controlled individually.

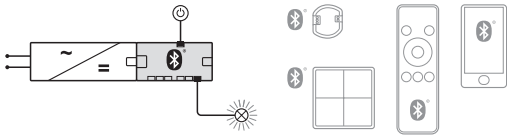


- > Area of application: For on/off switching and dimming (0–100%) of monochrome lights; or, in conjunction with adapters, for the operation of multi-white lights, RGB lights, and electrically operated fittings
- > Version: With programmable switching input
For standard Loox switches (switching function programmable via app; each active component can control each passive component, see page 97)
- > Material: Plastic
- > Colour: Black
- > Dim. (L x W x H): 120 x 50 x 16 mm
- > Number of connections: 1x input port with box to box plug
1x output port with box to box socket
1x input port switch socket
6x output ports device sockets (2-pin), can be controlled from any active component of the network
- > Supplied with: 1 distributor


Voltage	Max. connected wattage W	Cat. No.
5 12V	60	850.00.042
5 24V	90	850.00.043





Häfele Connect Mesh App

- > Detects and reports new nodes in the network independently
- > Intuitively assign functions to switches
- > Set up light groups and scenes
- > Share your protected access with others
- > The Häfele Connect Mesh App is free for Apple iOS® and Android™.



 The distance between the smartphone or tablet to the nearest Häfele Connect Mesh component is approx. 10 m. Multiple components create a network, and can also be placed approx. 10 m apart.


 Please order adapter for multi-white lights, RGB lights, or electrically operated fittings separately, see page 99

 6-way distributor for monochrome lights or other 2-pin devices, such as electrically operated fittings, see page 104

Adapters



Häfele Loox5 multi-white adapter for Häfele Connect Mesh 6-way distributor




- > Area of application: For connecting multi-white lights to the Häfele Connect Mesh 6-way distributor
- > Material/colour: Plastic, black
- > Dim. (L x W x H): 70 x 30 x 14 mm
- > Number of connections: 2x input port with plug, monochrome 6x output ports device sockets, multi-white
- > Supplied with: 1 distributor with 80 mm lead

Voltage	Max. connected wattage W	Cat. No.
5 12V	60	833.95.745
5 24V	90	833.77.830

! 1 multi-white adapter occupies 2 output ports at the 6-way distributor.

Häfele Loox5 RGB adapter for Häfele Connect Mesh 6-way distributor




- > Area of application: For connecting RGB lights to the Häfele Connect Mesh 6-way distributor
- > Material/colour: Plastic, black
- > Dim. (L x W x H): 70 x 30 x 14 mm
- > Number of connections: 3x input port with plug, monochrome 6x output ports for device sockets, RGB
- > Supplied with: 1 distributor with 80 mm lead

Voltage	Max. connected wattage W	Cat. No.
5 12V	60	833.95.746
5 24V	90	833.77.831

! 1 RGB adapter occupies 3 output ports at the 6-way distributor.

Häfele Connect Mesh adapter for electrically operated fittings

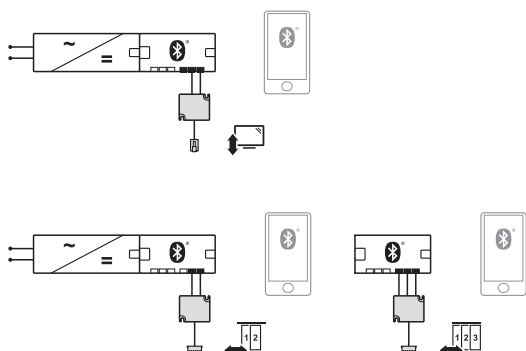


- > Area of application: For connecting electrically operated fittings to the Häfele Connect Mesh 6-way distributor.
- > Supplied with: 1 distributor

Voltage		Number of connections	Cat. No.
5 12V	TV lift adapter	Occupies 2 output ports	850.00.057
	eDrive 2 doors adapter	Occupies 2 output ports	850.00.058
	eDrive 3 doors adapter	Occupies 3 output ports	850.00.059

Remote controls



Häfele Connect Mesh remote control



Easiness

> One remote control for all applications: monochrome lights, multi-white lights, RGB lights and electrically operated fittings


- > Area of application: For controlling components at the Häfele Connect Mesh 6-way distributor
- > Function: Easy, direct pairing with a 6-way distributor or programming of buttons via app to control each node of the network
- > Version: Multi-function control panel
- > Material: Plastic
- > Colour: Top shell: Black, lower shell: White
- > Dim. (L x W x H): 130 x 42 x 11 mm
- > Supplied with: 1 remote control

	Cat. No.
Remote control	850.00.040

! Please order Häfele Connect Mesh 6-way distributor separately. Please order 2 replaceable CR2032 button cell lithium batteries (2 x 002.99.032) separately.



Häfele Connect Mesh push button, wall mounted



- > Area of application: For controlling components on the 6-way distributor, Häfele Connect Mesh (all functions that are accessible by pressing or holding a button)
- > Function: Programming of buttons via app to control each node of the network
- > Version: 4-button panel
- > Material: Plastic
- > Colour: Pushbutton: Black, frame: White
- > Dim. (L x W x H): 81 x 81 x 12 mm
- > Mounting: For screw fixing or glue fixing to any wall
- > Supplied with: 1 push button, wall mounted




	Cat. No.
Push button, wall mounted	850.00.041

! Please order Häfele Connect Mesh 6-way distributor separately. Please order 1 replaceable CR2430 button cell lithium battery (1 x 002.99.034) separately.


Interface electrical installation



Häfele Connect Mesh 2-channel interface, with potential free relay



Installation example

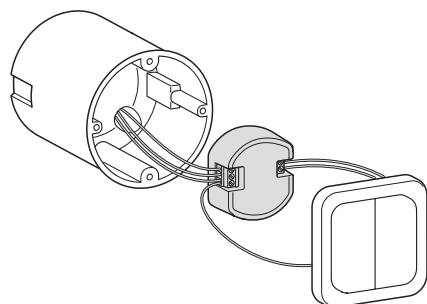

Installation in a deep switch box

Design advantage

> Use switches in the design of the house installation for the control of furniture and room lights with Häfele Connect Mesh

- > Area of application: For on/off control of room lighting or other home installations via the Häfele Connect Mesh and for integrating conventional wall-mounted push buttons into the Häfele Connect Mesh
- > Version: Function programmable via app, each active component can control each passive component, see page 97.
- > Number of connections: 2 switching input port for conventional wall-mounted push buttons (double-throw), 1 output port for on/off switching of 80–230 V, 3 A (can be controlled from any active component of the network)
- > Material: Plastic
- > Dim. (L x W x H): 39 x 44 x 21 mm
- > Mounting: Suitable for installation in switch boxes. Recommended switch box depth: 60 mm.
- > Supplied with: 1 2-channel interface

	Cat. No.
2-channel interface	850.00.046




Please order Häfele Connect Mesh 6-way distributor separately



Distributing

Distributor

 Häfele Loox5 6-way distributor > Page 104

 Häfele Connect Mesh 6-way distributor. **Chapter Networking** > Page 96



Leads and connectors for LED strip lights

Leads for LED strip light monochrome, 5 mm > Page 109

Leads for LED strip light monochrome, 8 mm > Page 110

Leads for LED silicone strip light monochrome, 8 mm > Page 111

Leads for LED strip light multi-white, 8 mm > Page 112

Leads for LED strip lights RGB, 10 mm > Page 113



Extension leads

Extension lead mono-chrome/2-pin > Page 105

Extension lead multi-white > Page 105

Extension lead RGB > Page 105

4-way extension lead mono-chrome/2-pin > Page 106



Adapters

Adapters Loox/Loox5 > Page 114



Modular leads

Lead for modular lights and other modular devices > Page 107



Mains leads

Country-specific main leads, socket C7 > Page 116

Country-specific main leads, socket C13 > Page 116



Switch leads

Extension lead for switch > Page 108

Lead for modular switches > Page 108

Lead for switches > Page 108



Cable routing


Cable channel > Page 117

Cable cover > Page 117



Distributing

Definition of terms

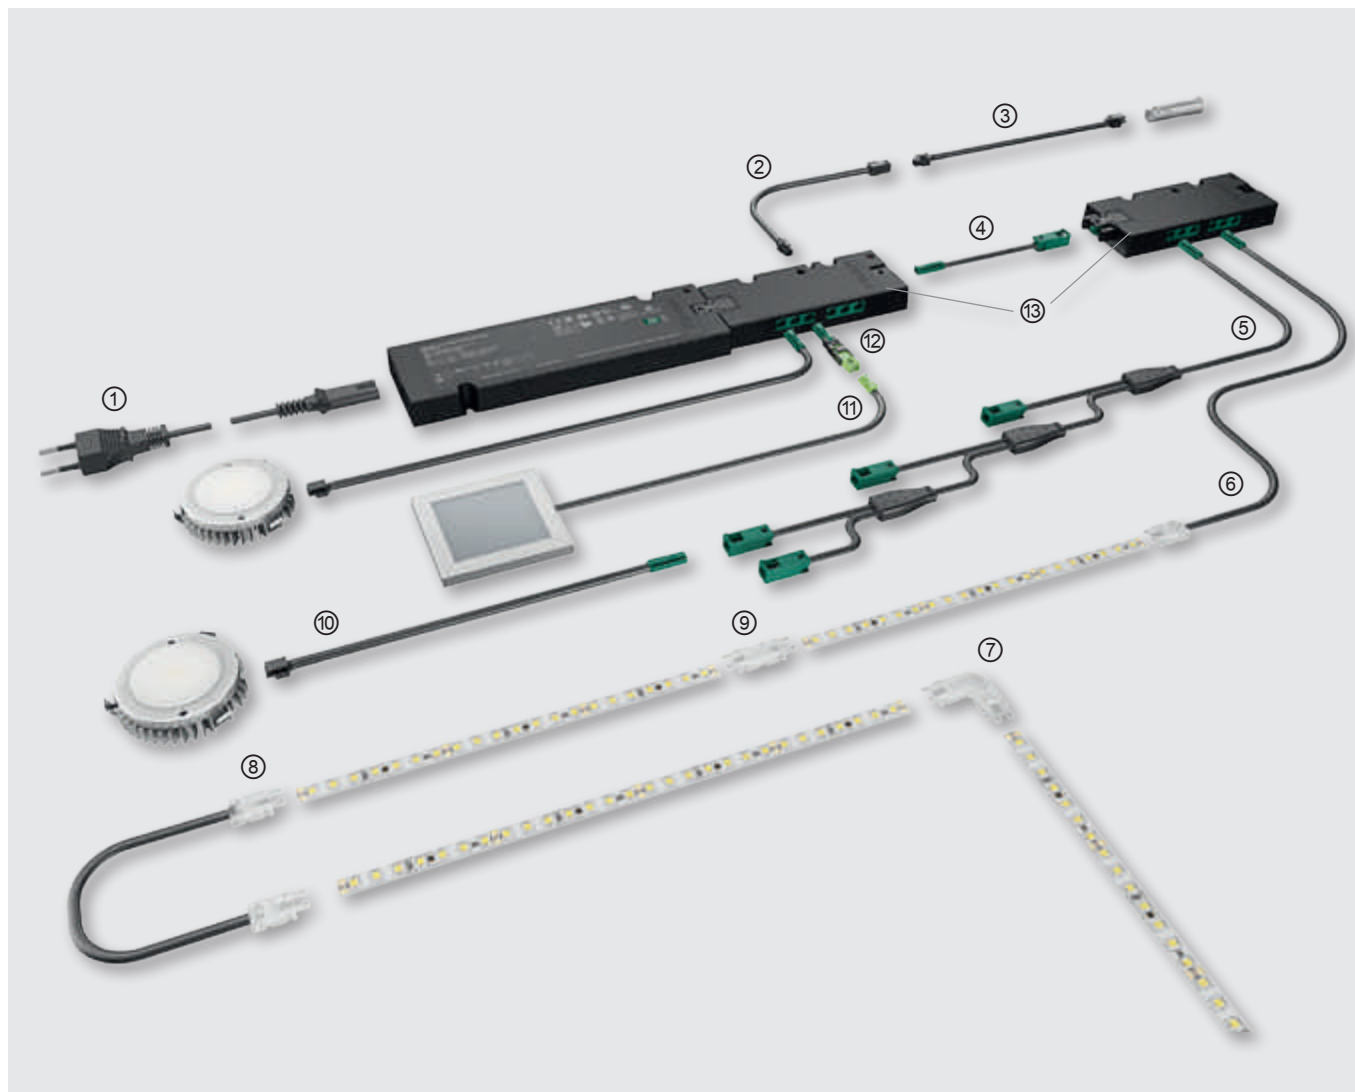

- ① Mains lead
- ② Extension lead for switch
- ③ Lead for modular switches
- ④ Extension lead
- ⑤ 4-way extension lead
- ⑥ Lead for LED strip light
- ⑦ Corner connector for LED strip light
- ⑧ Interconnecting lead for LED strip light
- ⑨ Clip connector for LED strip light
- ⑩ Lead for modular lights
- ⑪ Light with permanent lead
- ⑫ Adapter
- ⑬ 6-way distributor

Distributors

Häfele Loox5 box to box 6-way distributor

Plug connection box to box

> The connection of the distributors with the driver can be done via a box to box plug-in connection or via an extension lead. Any number of distributors can be connected to the driver. Observe maximum wattage!


> **Häfele Connect Mesh 6-way distributor: Chapter Networking**, see page 98



Häfele Loox5 box to box 6-way distributor with switching function




1 switch controls all output ports



- > Material: Plastic
- > Colour: Black
- > Dim. (L x W x H): 120 x 50 x 16 mm
- > Number of connections: 1 x input port with box to box plug
1 x output port with box to box socket
1 x input port switch socket
6 x output ports device sockets
- > Supplied with: 1 distributor

Voltage	Max. connected wattage W	Box to box with switching function
5 12V	60	833.95.748
5 24V	90	833.77.833

Häfele Loox5 box to box 6-way distributor without switching function




- > Material: Plastic
- > Colour: Black
- > Dim. (L x W x H): 120 x 50 x 16 mm
- > Number of connections: 1 x input port with box to box plug
1 x output port with box to box socket
6 x output ports device sockets
- > Supplied with: 1 distributor

Voltage	Max. connected wattage W	Box to box without switching function
5 12V	60	833.95.747
5 24V	90	833.77.832

Häfele Loox5 6-way distributor without switching function



Can also be connected to 6-way distributor



- > Material: Plastic
- > Colour: Black
- > Dim. (L x W x H): 70 x 30 x 14 mm
- > Number of connections: 1 x input port with plug, monochrome
6 x output ports device sockets
- > Supplied with: 1 distributor

Voltage	Max. connected wattage W	Without switching function
5 12V	60	833.95.786
5 24V	90	833.77.839


Extension leads

Häfele Loox5 extension leads

! Maximum lead length from the Loox5 driver to the device is 10 m.

Long cable lengths in combination with large loads (strip light lengths) can result in voltage losses in the cable. These lead to visible loss of brightness in the lights. The illuminance listed with the lights has been determined with the rated output voltage of the driver. (12 V or 24 V).


Häfele Loox5 extension leads monochrome

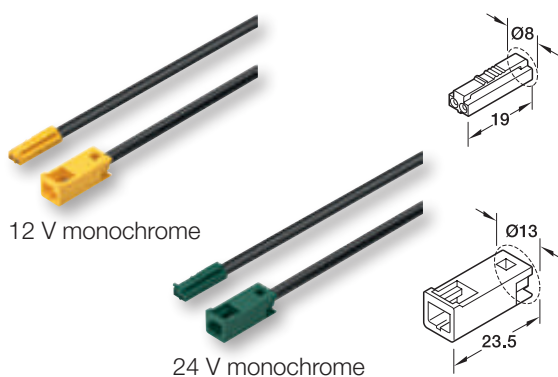

- > Area of application: For monochrome lights and other 2-pin devices and distributors
- > Material: Plastic
- > Current carrying capacity: Max. 5 A
- > Drill hole Ø: Plug 8 mm, socket 13 mm
- > Supplied with: 1 extension lead
1 plug/1 socket

Type of cable 20	Voltage	500 mm	1000 mm	2000 mm
Monochrome (2-wire 18 AWG)	5 12V	833.95.712	833.95.713	833.95.714
	5 24V	833.95.719	833.95.718	833.95.717


Häfele Loox5 extension leads multi-white

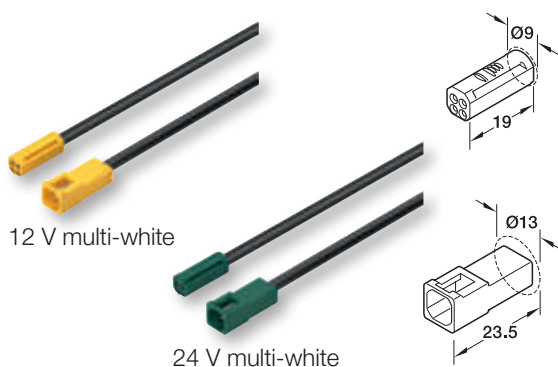

- > Area of application: For multi-white lights
- > Material: Plastic
- > Current carrying capacity: Max. 3.5 A
- > Drill hole Ø: Plug 9 mm, socket 13 mm
- > Supplied with: 1 extension lead
1 plug/1 socket

Type of cable	Voltage	500 mm	1000 mm	2000 mm
Multi-white (3-wire 20 AWG)	5 12V	-	-	833.95.715
	5 24V	-	-	833.95.720

Häfele Loox5 extension leads RGB

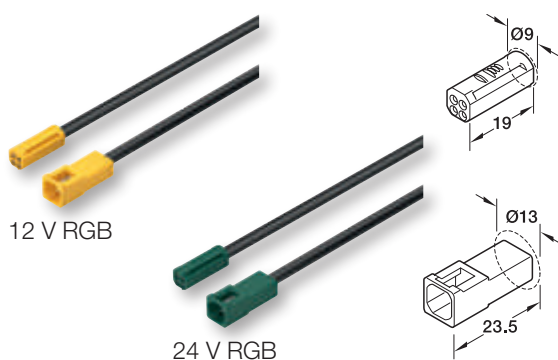


- > Area of application: For RGB lights
- > Material: Plastic
- > Current carrying capacity: Max. 3.5 A
- > Drill hole Ø: Plug 9 mm, socket 13 mm
- > Supplied with: 1 extension lead
1 plug/1 socket

Type of cable	Voltage	500 mm	1000 mm	2000 mm
RGB (4-wire 20 AWG)	5 12V	-	-	833.95.716
	5 24V	-	-	833.95.721

Extension leads

Häfele Loox5 4-way extension leads

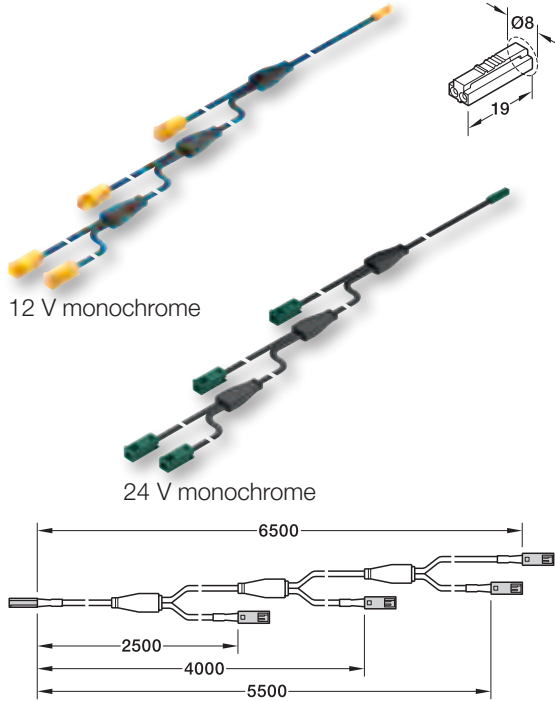

- > Area of application: For monochrome lights and other 2-pin devices and distributors
- > Current carrying capacity: Max. 5 A
- > Drill hole Ø: Plug 8 mm
- > Supplied with: 1 extension lead
1 plug/4 sockets

Type of cable	Voltage	Length mm	2000 mm
Monochrome (2-wire 18 AWG)	5 12 V	6500	833.95.742
	5 24 V		833.95.743

! Maximum lead length from the Loox5 driver to the device is 10 m. Long cable lengths in combination with large loads (strip light lengths) can result in voltage losses in the cable. These lead to visible loss of brightness in the lights. The illuminance listed with the lights has been determined with the rated output voltage of the driver. (12 V or 24 V).

Leads

Modular design

Häfele Loox5 lead for modular lights and other modular devices



12 V monochrome

24 V monochrome

- > Area of application: For monochrome lights and other 2-pin devices and distributors
- > Version: With snap-in connector
- > Current carrying capacity: Max. 1.5 A
- > Drill hole Ø: Plug 8 mm
- > Supplied with: 1 lead plug/plug

Type of cable	Voltage	Length mm	Cat. No.
Monochrome (2-wire 24 AWG)	5 12 V	1000	833.95.789
		2000	833.95.788
	5 24 V	2000	833.95.791

Häfele Loox5 lead for modular multi-white lights



12 V multi-white

24 V multi-white

- > Area of application: Modular multi-white lights
- > Version: With snap-in connector
- > Current carrying capacity: Max. 1.5 A
- > Drill hole Ø: Plug 9 mm
- > Supplied with: 1 lead plug/plug

Type of cable	Voltage	Length mm	Cat. No.
Multi-white (3-wire 24 AWG)	5 12 V	2000	833.95.787
		2000	833.95.790
	5 24 V	2000	833.95.790

Switch leads

Häfele Loox extension lead for switches



- > Area of application: Switches and modular switches
- > Drill hole Ø: Plug 12 mm
- > Supplied with: 1 extension lead plug/socket

Length mm	Cat. No.
2000	833.89.067

! The maximum lead length of a switch is 6 m.

Häfele Loox lead for modular switches



- > Area of application: Modular switches
- > Version: With snap-in connector
- > Drill hole Ø: Plug 12 mm
- > Supplied with: 1 lead plug/plug

Length mm	Cat. No.
500	833.89.140
1000	833.89.141
2000	833.89.142

Häfele Loox lead for multi boxes to switching input




- > Area of application: Multi switch box and multi driver box
- > Drill hole Ø: Plug 12 mm
- > Supplied with: 1 lead plug/plug

Length mm	Cat. No.
500	833.89.068
2000	833.89.069

Leads

For LED strip light monochrome, 5 mm

Häfele Loox5 lead for LED strip light monochrome, 5 mm

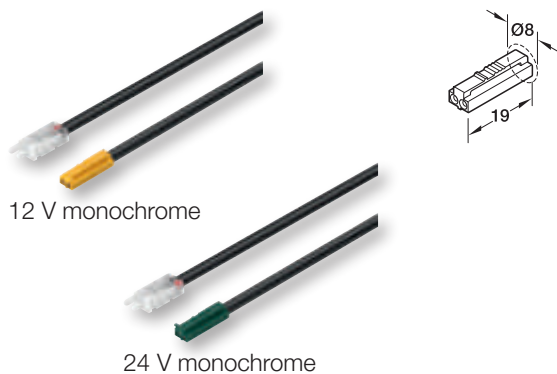

- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 7 mm
- > Drill hole Ø: Plug 8 mm
- > Supplied with: 1 lead plug/clip

Type of cable	Voltage	Length mm	Cat. No.
Monochrome (2-wire 20 AWG)	5 12V	2000	833.95.705
	5 24V	2000	833.95.711

Häfele Loox5 interconnecting lead for LED strip light monochrome, 5 mm



- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 7 mm
- > Drill hole Ø: Clip 10 mm
- > Supplied with: 1 interconnecting lead clip/clip

Type of cable	Length mm	Cat. No.
Monochrome (2-wire 20 AWG)	50	833.89.194
	500	833.89.195
	2000	833.89.196


Häfele Loox5 clip connector for LED strip light monochrome, 5 mm



- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 7 mm
- > Drill hole Ø: Clip 10 mm
- > Supplied with: 1 clip connector

Length mm	Cat. No.
33.5	833.89.207

Häfele Loox5 corner connector for LED strip light monochrome, 5 mm



- > Current carrying capacity: Max. 3.5 A
- > Supplied with: 1 corner connector


Length mm	Width mm	Cat. No.
21	21	833.89.190

Leads

For LED strip light monochrome, 8 mm

ALSO FOR CONSTANT CURRENT STRIP LIGHTS

Häfele Loox5 lead for LED strip light monochrome, 8 mm

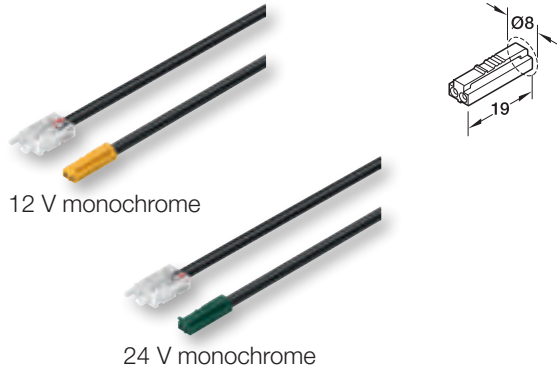

- > Current carrying capacity: Max. 5 A
- > Width: Clip 10 mm
- > Drill hole Ø: Plug 8 mm
- > Supplied with: 1 lead plug/clip

Type of cable	Voltage	Length mm	Cat. No.
Monochrome (2-wire 18 AWG)	5 12V	100	833.93.736
		500	833.95.701
		2000	833.95.700
	5 24V	100	833.75.743
		500	833.95.707
		2000	833.95.706


Häfele Loox5 interconnecting lead for LED strip light monochrome, 8 mm



- > Current carrying capacity: Max. 5 A
- > Width: Clip 10 mm
- > Drill hole Ø: Clip 12 mm
- > Supplied with: 1 lead clip/clip

Type of cable	Length mm	Cat. No.
Monochrome (2-wire 18 AWG)	50	833.89.191
	500	833.89.192
	2000	833.89.193

Häfele Loox5 clip connector for LED strip light monochrome, 8 mm

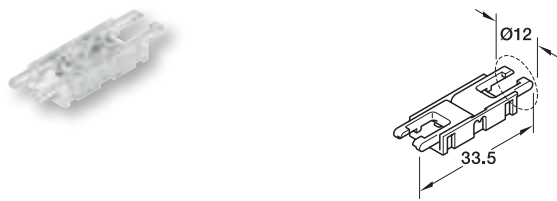

- > Current carrying capacity: Max. 5 A
- > Width: Clip 10 mm
- > Drill hole Ø: Clip 12 mm
- > Supplied with: 1 clip connector

Length mm	Cat. No.
33.5	833.89.206

Häfele Loox5 corner connector for LED strip light monochrome, 8 mm




- > Current carrying capacity: Max. 5 A
- > Supplied with: 1 corner connector

Length mm	Width mm	Cat. No.
24	24	833.89.187

Leads

For LED silicone strip light monochrome, 8 mm

Häfele IP44 Loox5 lead for LED silicone strip light monochrome, 8 mm

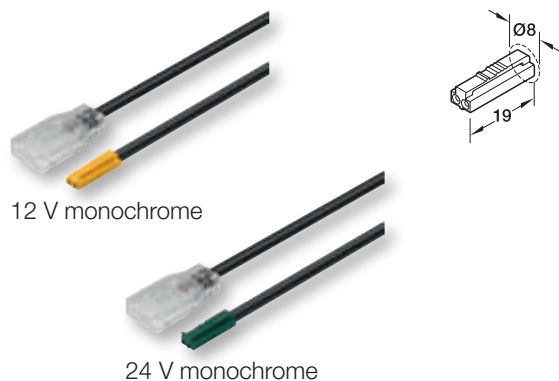

- > Current carrying capacity: Max. 5 A
- > Width: Silicone plug 15 mm
- > Drill hole Ø: Plug 8 mm
- > Supplied with: 1 lead plug/clip

Type of cable	Voltage	Length mm	Cat. No.
Monochrome (2-wire 18 AWG)	5 12V	2000	833.95.703
	5 24V	2000	833.95.709

Häfele IP44 Loox5 interconnecting lead for LED silicone strip light monochrome, 8 mm



- > Current carrying capacity: Max. 5 A
- > Width: Clip 15 mm
- > Drill hole Ø: Clamp 18 mm
- > Supplied with: 1 lead clip/clip

Type of cable	Length mm	Cat. No.
Monochrome (2-wire 18 AWG)	50	833.89.203
	500	833.89.204
	2000	833.89.205


➔ The leads and clips on page 110 can be used to make IP20 connections for the monochrome 8 mm silicon strip.

Leads

For LED strip light multi-white, 8 mm



Häfele Loox5 lead for LED strip light multi-white, 8 mm

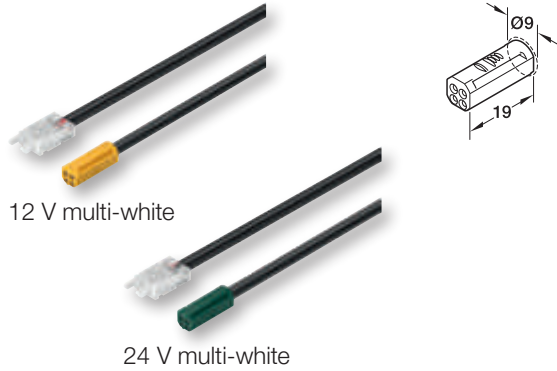

- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 10 mm
- > Drill hole Ø: Plug 9 mm
- > Supplied with: 1 lead plug/clip

Type of cable	Voltage	Length mm	Cat. No.
Multi-white (3-wire 20 AWG)	5 12V	2000	833.95.702
	5 24V	2000	833.95.708

Häfele Loox5 interconnecting lead for LED strip light multi-white, 8 mm



- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 10 mm
- > Drill hole Ø: Clip 12 mm
- > Supplied with: 1 lead clip/clip

Type of cable	Length mm	Cat. No.
Multi-white (3-wire 20 AWG)	50	833.89.197
	500	833.89.198
	2000	833.89.199

Häfele Loox5 clip connector for LED strip light multi-white, 8 mm



- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 10 mm
- > Drill hole Ø: Clip 12 mm
- > Supplied with: 1 clip connector

Length mm	Cat. No.
33.5	833.89.208

Häfele Loox5 corner connector for LED strip light multi-white, 8 mm



- > Current carrying capacity: Max. 3.5 A
- > Supplied with: 1 corner connector


Length mm	Width mm	Cat. No.
24	24	833.89.188

Leads

For LED strip light RGB, 10 mm



Häfele Loox5 lead for LED strip light RGB, 10 mm

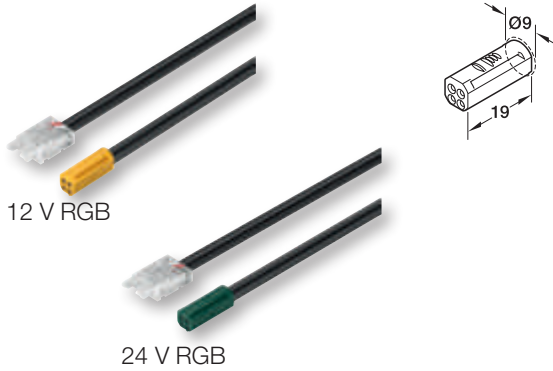

- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 12 mm
- > Drill hole Ø: Plug 9 mm
- > Supplied with: 1 lead plug/clip

Type of cable	Voltage	Length mm	Cat. No.
RGB (4-wire 20 AWG)	5 12V	2000	833.95.704
	5 24V	2000	833.95.710


Häfele Loox5 interconnecting lead for LED strip light RGB, 10 mm



- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 12 mm
- > Drill hole Ø: Clip 14 mm
- > Supplied with: 1 lead clip/clip

Type of cable	Length mm	Cat. No.
RGB (4-wire 20 AWG)	50	833.89.200
	500	833.89.201
	2000	833.89.202

Häfele Loox5 clip connector for LED strip light RGB, 10 mm

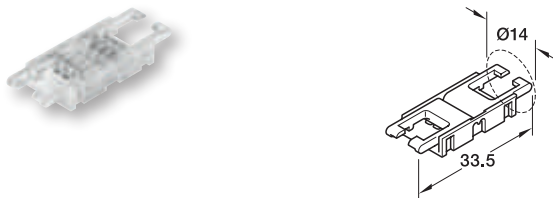

- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 12 mm
- > Drill hole Ø: Clip 14 mm
- > Supplied with: 1 clip connector

Length mm	Cat. No.
33.5	833.89.209

Häfele Loox5 corner connector for LED strip light RGB, 10 mm




- > Current carrying capacity: Max. 3.5 A
- > Supplied with: 1 corner connector

Length mm	Width mm	Cat. No.
26	26	833.89.189


Adapter

Loox5 driver > Loox device

Adapter for devices with Loox plug for connecting to Loox5 driver

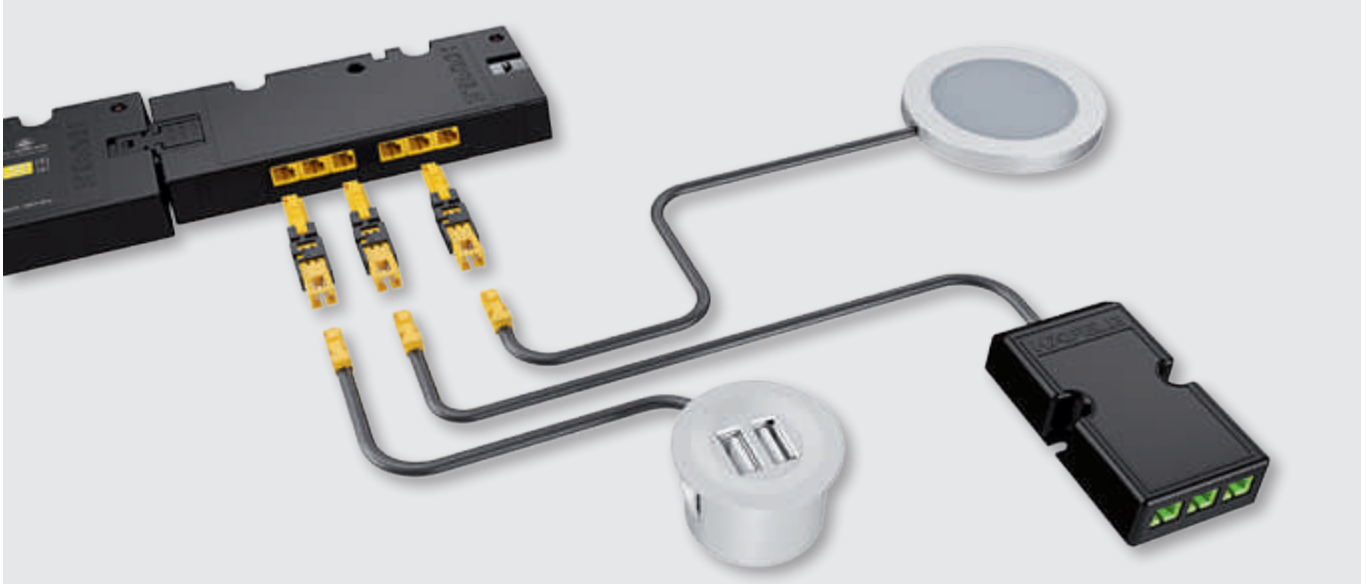

12 V: Loox socket/Loox5 plug



24 V: Loox socket/Loox5 plug

- > Area of application: For connecting Loox devices to Loox5 drivers or Loox5 distributors. Suitable for all devices with Loox plug, e.g. monochrome lights, distributors, charging stations, colour mixers for multi-white and RGB as well as electrically operated fittings, converters, etc.
- > Length: 50 mm
- > Current carrying capacity: Max. 3.5 A
- > Drill hole Ø: 12 mm
- > Packing: 6 pieces


Device	Driver	Max. connected wattage W	Cat. No.
12 V	5 12V	Max. 42	833.95.753
24 V	5 24V	Max. 84	833.77.838

! Not suitable for 3-pin Loox plugs (multi-white) or 4-pin Loox plugs (RGB).
The current carrying capacity is limited to 3.5 A.
Observe maximum wattage!

Adapter

Loox driver > Loox5 device

Adapter for devices with Loox5 plug for connecting to Loox driver



12 V: Loox5 socket/Loox plug



24 V: Loox5 socket/Loox plug

- > Area of application: For connecting Loox5 devices to Loox drivers or Loox distributors. Suitable for all devices with 2-pin Loox5 plug, e.g. monochrome lights, distributors, charging stations, etc.
- > Length: 45 mm
- > Current carrying capacity: Max. 3.5 A
- > Drill hole Ø: 13 mm
- > Packing: 6 pieces

Device	Driver	Max. connected wattage W	Cat. No.
5 12V	12V	Max. 42	833.95.752
5 24V	24V	Max. 84	833.77.837

! Not suitable for 4-pin Loox5 plugs (multi-white or RGB). The current carrying capacity is limited to 3.5 A. Observe maximum wattage!

Adapter leads for LED strip lights with Loox5 clip for connecting to Loox driver or colour mixer

Device	Driver/colour mixer	Length mm	for LED strip light	Cat. No.
5 12V	12V	2000	monochrome 5 mm	833.72.742
			monochrome 8 mm	833.72.716
			multi-white 8 mm	833.72.717
			RGB 10 mm	833.72.718
5 24V	24V	2000	monochrome 5 mm	833.75.732
			monochrome 8 mm	833.75.705
			multi-white 8 mm	833.75.706
			RGB 10 mm	833.75.707

Mains leads

Country-specific main leads, socket at cable: C7



833.89.000 UK



833.89.001 AU



833.89.002 EU



833.89.003 US



833.89.016 JP



833.89.005 CN



833.89.006 KR



833.89.007 TW



833.89.009 EU



833.89.050 US

Plug design										
Description	UK	AU	EU	US	JP	CN	KR	TW	EU	US
Voltage (V)	250	250	250	120	100	250	250	110	250	120
Length (mm)	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
Material/colour	Plastic, black									
Supplied with	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece
Cat. No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.006	833.89.007	833.89.009	833.89.050

Country-specific main leads, socket at cable: C13



833.89.256 UK



833.89.257 AU



833.89.258 EU



833.89.259 US



833.89.260 JP



833.89.261 CN



833.89.262 KR



833.89.263 TW



833.89.265 EU




833.89.264 US

Plug design										
Description	UK	AU	EU	US	JP	CN	KR	TW	EU	US
Length (mm)	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
Material/colour	Plastic, black									
Supplied with	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece
Cat. No.	833.89.256	833.89.257	833.89.258	833.89.259	833.89.260	833.89.261	833.89.262	833.89.263	833.89.265	833.89.264

Cable routing



Häfele Loox cable channel



- > Dim. (L x W x H): 2500 x 12 x 7.5 mm
- > Application: Concealing visible cables in furniture and cabinets
- > Supplied with: 1 cable channel with adhesive tape

Finish	Cat. No.
Black, RAL 9005	833.89.033
Brown, RAL 8007	833.89.023
White, RAL 9010	833.89.013

Häfele Loox cable cover



- > Material: Plastic
- > Length: 2,500 mm
- > Application: For concealing visible cables in furniture and cabinets, for recess mounting
- > Supplied with: 1 profile

Finish	Cat. No.
Black, RAL 9005	833.74.797
Brown, RAL 8007	833.74.796
White, RAL 9010	833.74.795



Supplying

Häfele Loox5 drivers 12 V

Häfele Loox wall plug drivers 12 V	> Page 120
Häfele Loox leads 12 V	> Page 120
Constant voltage 12 V	> Page 121
Country-specific main leads	> Page 121



Häfele Loox5 drivers 24 V

Constant voltage 24 V	> Page 122
Country-specific main leads	> Page 122



Häfele Loox5 drivers 350 mA

Häfele Loox driver 350 mA	> Page 124
Country-specific main leads	> Page 124




Häfele Loox converters

Converter 24 V to 12 V	> Page 125
Converter 350 mA to 12 V	> Page 125
Converter 12 V to 24 V	> Page 125



Supplying

Central or decentralised supply

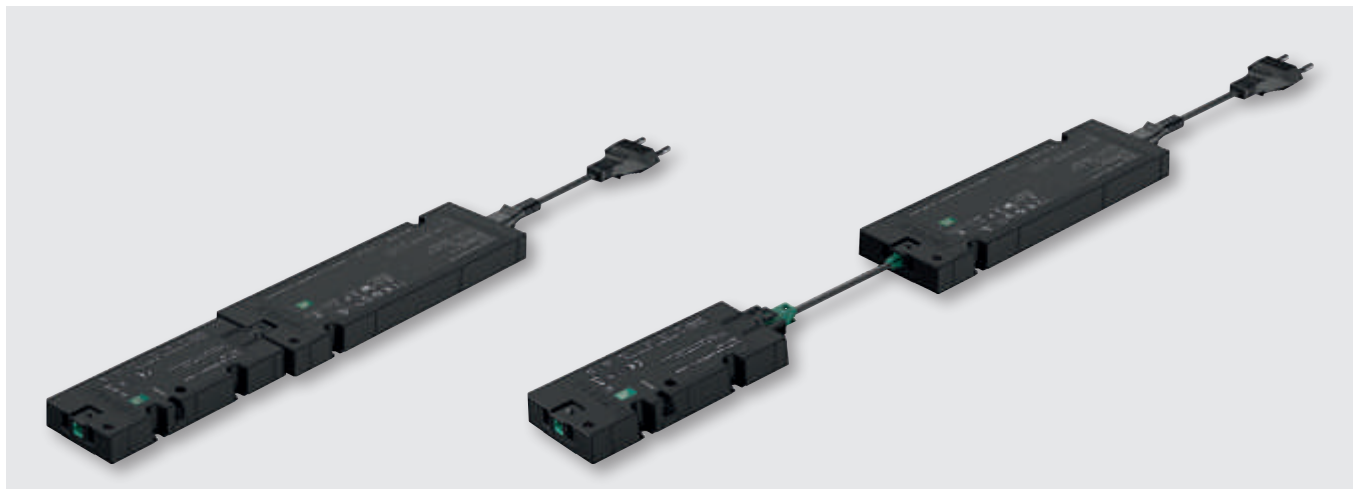

Central and compact

Driver with 6-way distributor via box to box plug-in connection for compact dimensions.

Decentralised

Driver at the entry point of a given socket position. Decentralised 6-way distributor via cable connection.

3-level control concept

Loox5 specialises the tasks: on the one hand, professional drivers with top performance in terms of energy efficiency, life time, overload protection, and rectification, and on the other hand, the 6-way distributor with a 3-level control concept that can be combined as desired:



Level 1

Distributor without switching function



Level 2

Distributor with switching function



Level 3

Distributor with switching function and Bluetooth® chip for the network control in the Häfele Connect Mesh

- > 6-way distributors see page 104
- > Häfele Connect Mesh 6-way distributor see page 98
- > Extension leads see page 105

Drivers

12 V

Häfele Loox wall plug driver 12 V



Driver 15 W EU
833.74.935



Driver 15 W US
833.74.936




Driver 15 W UK
833.74.958


- > Colour: Black
- > Degree of protection: IP20
- > Input voltage: 100–240 V~; 50–60 Hz
- > Output voltage: DC 12 V
- > Standby power consumption: 0.1 W
- > Supplied with: 1 wall plug driver

Plug design/ designation	Output power W	Dim. (L x W x H) mm	Cat. No.
EU	6	61 x 37 x 57	833.74.933
	15	78 x 46 x 68	833.74.935
	27	84 x 50 x 72	833.74.937
US	6	61 x 37 x 43	833.74.934
	15	78 x 46 x 54	833.74.936
	27	84 x 50 x 64	833.74.959
UK	6	61 x 50 x 53	833.74.957
	15	78 x 49 x 60	833.74.958
	27	84 x 50 x 64	833.74.959


Häfele Loox leads 12 V



833.74.749




833.74.748



833.74.709



833.74.747



833.74.746

12 V Plug design/ designation	Cat. No.
4 m lead 2.5 A/22 AWG with 2 slots	833.74.749
4 m lead 2.5 A/22 AWG with 6-way distributor	833.74.748
4 m lead 2.5 A/22 AWG with dimmer and 6-way distributor	833.74.709
4 m lead 2.5 A/22 AWG with foot switch and 6-way distributor	833.74.747
4 m lead 2.5 A/22 AWG with rocker switch and 6-way distributor	833.74.746

! **5 12V 12V** All sockets for 12 V Loox. Please order 6-piece adapter set 833.95.752 for Loox5 devices separately.

Drivers

12 V

Häfele Loox5 driver constant voltage 12 V



- > Version: With overload protection
- > Colour: Black
- > Degree of protection: IP20
- > Input voltage: 100–240 V~; 50–60 Hz
- > Output voltage: DC 12 V
- > Number of connections: 1x socket Loox5 12 V
- > Life time: >50,000 hours
- > Supplied with: 1 driver with mounting accessories

5 12V	Output power	Output current	Standby power consumption	Dim. (L x W x H)	Cat. No.
	W	A	W	mm	
1	20	1.67	≤0,2 W	140 x 50 x 16	833.95.000
2	40	3.33	≤0.3 W	191 x 60 x 16	833.95.002
3	60	5.00	≤0.3 W	230 x 70 x 16	833.95.003

! Ambient temperature –25 °C to +45 °C (60 W: 40 °C)
Ensure that there is a sufficient air supply and circulation at the mounting location.

! Maximum lead length from the Loox5 driver to the device is 10 m. Long cable lengths in combination with large loads (strip light lengths) can result in voltage losses in the cable. These lead to visible loss of brightness in the lights. The illuminance listed with the lights has been determined with the rated output voltage of the driver. (12 V or 24 V).

Country-specific main leads – 2 metre lead length, socket at the cable: C7

Plug design										
Description	UK	AU	EU	US	JP	CN	KR	TW	EU	US
Supplied with	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece
Cat. No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.006	833.89.007	833.89.009	833.89.050

Drivers

24 V

Häfele Loox5 driver constant voltage 24 V



- > Version: With overload protection
- > Colour: Black
- > Degree of protection: IP20
- > Input voltage: 100–240 V~; 50–60 Hz
- > Output voltage: DC 24 V
- > Number of connections: 1x socket Loox5 24 V
- > Life time: >50,000 hours
- > Supplied with: 1 driver with mounting accessories

5 ^{24 V}	Output power	Output current	Standby power consumption	Dim. (L x W x H)	Cat. No.
	W	A	W	mm	
1	20	0.83	≤0,2 W	140 x 50 x 16	833.95.008
2	40	1.67	≤0.3 W	191 x 60 x 16	833.95.010
3	90	3.75	≤0.3 W	316 x 70 x 16	833.95.011

! Ambient temperature –25 °C to +45 °C
Ensure that there is a sufficient air supply and circulation at the mounting location.

! Maximum lead length from the Loox5 driver to the device is 10 m. Long cable lengths in combination with large loads (strip light lengths) can result in voltage losses in the cable. These lead to visible loss of brightness in the lights. The illuminance listed with the lights has been determined with the rated output voltage of the driver. (12 V or 24 V).

Country-specific main leads – 2 metre lead length, socket at the cable: C7

Plug design										
Description	UK	AU	EU	US	JP	CN	KR	TW	EU	US
Supplied with	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece
Cat. No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.006	833.89.007	833.89.009	833.89.050

Drivers

24 V

Häfele Loox5 driver constant voltage 24 V



Driver 240 W, 200–240 V~
833.95.012



Driver 270 W, 100–120 V~
833.95.022



- > Version: With overload protection
- > Colour: Black
- > Degree of protection: IP20
- > Standby power consumption: <0.5 W
- > Output voltage: DC 24 V
- > Dim. (L x W x H): 234 x 75 x 38 mm
- > Life time: >50,000 hours
- > Supplied with: 1 driver with mounting accessories

5 ^{24 V}	Input voltage	Output power W	Output current A	Number of connections Loox5 24 V	Cat. No.
-------------------	---------------	-------------------	---------------------	--	----------

200–240 V~: typical input voltage in UK, AU, EU, KR and large areas of Asia and Africa

4	200–240 V~, 50–60 Hz	240 (2 x 120)	2 x 5	2x socket	833.95.012
---	-------------------------	---------------	-------	-----------	------------

100–120 V~: typical input voltage in US, JP, CN, TW

5	100–120 V~, 50–60 Hz	270 (3 x 90)	3 x 3,75	3x socket	833.95.022
---	-------------------------	--------------	----------	-----------	------------

⚠ Please pay attention to the regional input voltage when choosing the driver!

⚠ Ambient temperature –25 °C to +45 °C (270 W: 40 °C)
Ensure that there is a sufficient air supply and circulation at the mounting location.

⚠ Maximum lead length from the Loox5 driver to the device is 10 m. Long cable lengths in combination with large loads (strip light lengths) can result in voltage losses in the cable. These lead to visible loss of brightness in the lights. The illuminance listed with the lights has been determined with the rated output voltage of the driver. (12 V or 24 V).

Country-specific main leads – 2 metre lead length, socket at the cable: C13

Plug design										
Description	UK	AU	EU	US	JP	CN	KR	TW	EU	US
Supplied with	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece
Cat. No.	833.89.256	833.89.257	833.89.258	833.89.259	833.89.260	833.89.261	833.89.262	833.89.263	833.89.265	833.89.264

Drivers

350 mA

Häfele Loox driver 350 mA



- > Colour: Black
- > Degree of protection: IP20
- > Input voltage: 100–240 V~; 50–60 Hz
- > Constant current: DC 350 mA
- > Standby power consumption: <0.5 W
- > Supplied with: 1 driver with mounting accessories

Number of connections	Output power W	Dim. (L x W x H) mm	Cat. No.
4 x devices, 1 x switch	>1.5–4	140 x 43 x 20	833.80.900
10 x devices, 1 x switch	>5–10	195 x 43 x 28	833.80.901

+ Cable bridge (replacement) Cat. No. 833.80.720

! Note minimum output power.
 Lead length from driver to switch max. 6 m.
 All lights and switches must be connected to the driver first, before connecting the driver to the mains. Any unused slot must have a cable bridge. Bridge connectors are supplied.
 Ensure that there is a sufficient air supply and circulation at the mounting location.
 Ambient temperature –10 °C to +40 °C




Country-specific main leads – 2 metre lead length, socket at the cable: C7

Plug design										
Description	UK	AU	EU	US	JP	CN	KR	TW	EU	US
Supplied with	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece	1 piece
Cat. No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.006	833.89.007	833.89.009	833.89.050

LOOX 2019, HDE-en, 02/20; Dimensional data not binding. We reserve the right to alter specifications without notice.

Converters

Häfele Loox converter 24 V to 12 V – for connecting 24 V lights to the 12 V system

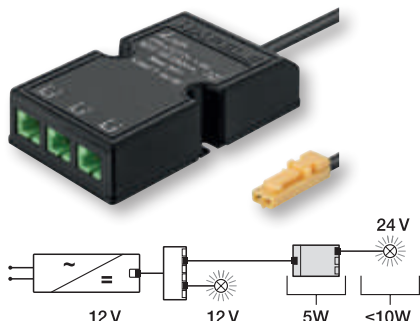


12V **5 12V** Loox5 12 V driver see page 121
Please order 6-piece adapter set 833.95.753 separately.

- > Application: Connecting 24 V lights to the 12 V system
- > Wattage: Input 15 W, output 10 W
- > Primary side: DC 12 V
- > Secondary side: DC 24 V
- > Number of output ports: 3 connections for 24 V lights
- > Supplied with: 1 converter with 200 mm lead

Dim. (L x W x H) mm	Standby power consumption W	Cat. No.
61 x 34 x 15	0.3	833.77.934

⚠ Maximum possible connected rating of 10 W per converter.

Häfele Loox converter 350 mA to 12 V – for connecting 350 mA lights to the 12 V system

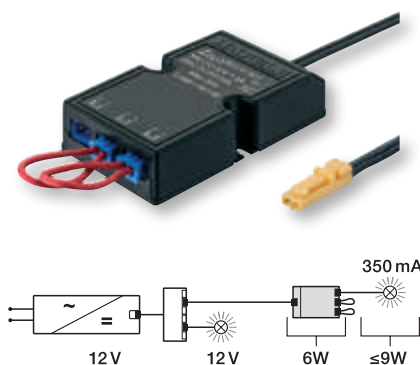

12V **5 12V** Loox5 12 V driver see page 85
Please order 6-piece adapter set 833.95.753 separately.


- > Application: Connecting 350 mA lights to the 12 V system
- > Wattage: Input 15 W, output 9 W
- > Primary side: DC 12 V
- > Secondary side: DC 350 mA (min. 1 W, max. 9 W)
- > Number of output ports: 3 connections for 350 mA lights
- > Supplied with: 1 converter with 200 mm lead

Dim. (L x W x H) mm	Standby power consumption W	Cat. No.
61 x 34 x 15 mm	0.2	833.80.912

⚠ Maximum possible connected rating of 9 W per converter.

⊕ Cable bridge (alternative); 1 piece Cat. No. 833.80.720

Häfele Loox converter 12 V to 24 V – for connecting 12 V lights to the 24 V system

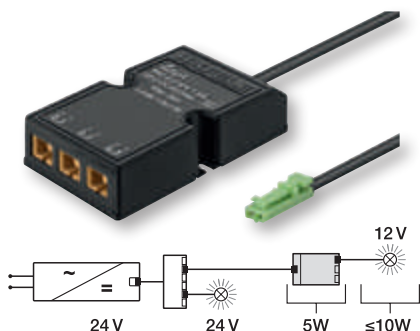

24V **5 24V** Loox5 24 V driver see page 86
Please order 6-piece adapter set 833.77.838 separately.

- > Application: Connecting 12 V lights to the 24 V system
- > Wattage: Input 15 W, output 10 W
- > Primary side: DC 24 V
- > Secondary side: DC 12 V
- > Number of output ports: 3 connections for 12 V lights
- > Supplied with: 1 converter with 200 mm lead

Dim. (L x W x H) mm	Standby power consumption W	Cat. No.
61 x 34 x 15 mm	0.3	833.74.947

⚠ Maximum possible connected rating of 10 W per converter.

LED strip lights

Technical data, monochrome 5 mm / 8 mm

	Voltage V	Model Häfele Loox5	Quantity LEDs/m	Colour temperature K		Illuminance lx				Wattage W/m
						Distance				
						250 mm	500 mm	750 mm	1000 mm	
LED strip lights monochrome, 5 mm										
	5 12V	LED 2060	120	2700	940		400	220	135	4.8
				3000	970		420	235	145	4.8
				4000	1000		430	240	145	4.8
				5000	1030		430	240	145	4.8
	LED 2061	120	2700	1860		790	440	270	9.6	
			3000	1960		850	470	290	9.6	
			4000	2000		860	480	290	9.6	
			5000	2060		860	480	290	9.6	
	5 24V	LED 3040	120	2700	940		400	220	135	4.8
				3000	970		420	235	145	4.8
				4000	1000		430	240	145	4.8
				5000	1030		430	240	145	4.8
	LED 3041	120	2700	1860		790	440	270	9.6	
			3000	1960		850	470	290	9.6	
			4000	2000		860	480	290	9.6	
			5000	2060		860	480	290	9.6	
LED strip lights monochrome, 8 mm										
	5 12V	LED 2062	60	2700	1050		435	240	145	4.8
				3000	1090		455	245	150	4.8
				4000	1120		460	260	155	4.8
				5000	1130		470	260	160	4.8
		LED 2065	120	2700	1050		435	240	145	4.8
				3000	1090		455	245	150	4.8
	4000			1120	460		260	155	4.8	
	5000			1130	470		260	160	4.8	
	LED 2068	120	2700	2145		900	480	300	9.6	
			3000	2250		940	505	310	9.6	
			4000	2300		950	510	320	9.6	
			5000	2300		955	515	320	9.6	
	5 24V	LED 3042	120	2700	1050		435	240	145	4.8
				3000	1090		455	245	150	4.8
				4000	1120		460	260	155	4.8
				5000	1130		470	260	160	4.8
		LED 3045	120	2700	2145		900	480	300	9.6
				3000	2250		940	505	310	9.6
	4000			2300	950		510	320	9.6	
	5000			2300	955		515	320	9.6	
	LED 3048	120	2700	2870		1210	665	415	14.4	
			3000	3000		1270	695	430	14.4	
4000			3100	1310		715	445	14.4		
5000			3100	1320		715	450	14.4		












	Luminous flux lm/m	Luminous efficacy lm/W	Section length mm	Colour rendering index CRI		Available length			Max. strip length (visual) m	Max. strip length wattage-dependent m on the Loox5 driver			
				R _a	R ₉	5 m	15 m	50 m		20 W	40 W	60 W	90 W
	440	92	25	>90	>50	833.74.320	833.74.324	–	4.0	4.10	8.30	12.50	–
	460	96	25	>90	>50	833.74.321	833.74.325	–	4.0				
	480	100	25	>90	>50	833.74.322	833.74.326	–	4.0				
	495	103	25	>90	>50	833.74.323	833.74.327	–	4.0				
	870	91	25	>90	>50	833.74.328	833.74.332	–	3.0	2.00	4.10	6.20	–
	930	97	25	>90	>50	833.74.329	833.74.333	–	3.0				
	955	99	25	>90	>50	833.74.330	833.74.334	–	3.0				
	990	103	25	>90	>50	833.74.331	833.74.335	–	3.0				
	440	92	50	>90	>50	833.76.300	833.76.304	–	8.0	4.10	8.30	–	18.70
	460	96	50	>90	>50	833.76.301	833.76.305	–	8.0				
	480	100	50	>90	>50	833.76.302	833.76.306	–	8.0				
	495	103	50	>90	>50	833.76.303	833.76.307	–	8.0				
	870	91	50	>90	>50	833.76.308	833.76.312	–	5.5	2.00	4.10	–	9.30
	930	97	50	>90	>50	833.76.309	833.76.313	–	5.5				
	955	99	50	>90	>50	833.76.310	833.76.314	–	5.5				
	990	103	50	>90	>50	833.76.311	833.76.315	–	5.5				
	440	92	50	>90	>50	833.74.336	–	833.74.340	6.0	4.10	8.30	12.50	–
	465	97	50	>90	>50	833.74.337	–	833.74.341	6.0				
	490	102	50	>90	>50	833.74.338	–	833.74.342	6.0				
	495	103	50	>90	>50	833.74.339	–	833.74.343	6.0				
	440	92	25	>90	>50	833.74.354	–	833.74.358	6.0	4.10	8.30	12.50	–
	465	97	25	>90	>50	833.74.355	–	833.74.359	6.0				
	490	102	25	>90	>50	833.74.356	–	833.74.360	6.0				
	495	103	25	>90	>50	833.74.357	–	833.74.361	6.0				
	920	96	25	>90	>50	833.74.362	–	833.74.366	4.0	2.00	4.10	6.20	–
	970	101	25	>90	>50	833.74.363	–	833.74.367	4.0				
	1000	104	25	>90	>50	833.74.364	–	833.74.368	4.0				
	1040	108	25	>90	>50	833.74.365	–	833.74.369	4.0				
	440	92	50	>90	>50	833.76.316	–	833.76.320	12.0	4.10	8.30	–	18.70
	465	97	50	>90	>50	833.76.317	–	833.76.321	12.0				
	490	102	50	>90	>50	833.76.318	–	833.76.322	12.0				
	495	103	50	>90	>50	833.76.319	–	833.76.323	12.0				
	920	96	50	>90	>50	833.76.334	–	833.76.338	8.0	2.00	4.10	–	9.30
	970	101	50	>90	>50	833.76.335	–	833.76.339	8.0				
	1000	104	50	>90	>50	833.76.336	–	833.76.340	8.0				
	1040	108	50	>90	>50	833.76.337	–	833.76.341	8.0				
	1270	88	50	>90	>50	833.76.352	–	833.76.356	6.2	1.30	2.70	–	6.20
	1305	91	50	>90	>50	833.76.353	–	833.76.357	6.2				
	1340	93	50	>90	>50	833.76.354	–	833.76.358	6.2				
	1430	99	50	>90	>50	833.76.355	–	833.76.359	6.2				



For quick selection of linear light, see page 2

LED strip lights

Technical data, monochrome constant current 8 mm / silicone 8 mm

	Voltage V	Model Häfele Loox5	Quantity LEDs/m	Colour temperature K	Illuminance lx Distance				Watt- age W/m	
					250 mm	500 mm	750 mm	1000 mm		
LED strip lights monochrome constant current 8 mm										
	5 12V	LED 2077	120	2700	1775		760	425	265	9.6
				3000	1850		790	440	270	9.6
				4000	1950		830	465	285	9.6
				5000	1950		830	465	285	9.6
	5 24V	LED 3050	140	2700	2050		890	490	305	9.6
				3000	2150		930	520	325	9.6
				4000	2205		990	545	335	9.6
				5000	2340		1010	550	340	9.6
	LED 3051	140		2700	3150	1365	760	470	14.4	
				3000	3170	1385	770	480	14.4	
				4000	3190	1390	770	480	14.4	
				5000	3200	1400	770	480	14.4	
	LED 3052	140		2700	4070	1750	970	600	19.2	
				3000	4160	1780	990	620	19.2	
				4000	4220	1800	1000	625	19.2	
				5000	4260	1840	1020	630	19.2	
LED silicone strip lights monochrome, 8 mm										
	5 12V	LED 2063	60	2700	920		390	215	135	4.8
				3000	960		410	225	140	4.8
				4000	975		415	230	145	4.8
				5000	1010		425	235	145	4.8
	5 24V	LED 3043	120	2700	920		390	215	135	4.8
				3000	960		410	225	140	4.8
				4000	975		415	230	145	4.8
				5000	1010		425	235	145	4.8
	LED 3046	120		2700	1855	790	435	270	9.6	
				3000	1895	805	445	275	9.6	
				4000	1960	840	465	290	9.6	
				5000	2020	860	475	295	9.6	

	Luminous flux lm/m	Luminous efficacy lm/W	Section length mm	Colour rendering index CRI		Available length			Max. strip length (visual) m	Max. strip length wattage-dependent m on the Loox5 driver			
				R _a	R ₉	5 m	15 m	50 m		20 W	40 W	60 W	90W
	810	84	25	>90	>50	833.74.372	–	833.74.376	6.2	2.00	4.10	6.20	–
	860	90	25	>90	>50	833.74.373	–	833.74.377	6.2				
	900	94	25	>90	>50	833.74.374	–	833.74.378	6.2				
	905	94	25	>90	>50	833.74.375	–	833.74.379	6.2				
	945	98	50	>90	>50	833.76.362	–	833.76.366	9.0	2.00	4.10	–	9.30
	1030	107	50	>90	>50	833.76.363	–	833.76.367	9.0				
	1060	110	50	>90	>50	833.76.364	–	833.76.368	9.0				
	1080	113	50	>90	>50	833.76.365	–	833.76.369	9.0				
	1430	99	50	>90	>50	833.76.370	–	833.76.374	6.2	1.30	2.70	–	6.20
	1520	106	50	>90	>50	833.76.371	–	833.76.375	6.2				
	1605	111	50	>90	>50	833.76.372	–	833.76.376	6.2				
	1650	115	50	>90	>50	833.76.373	–	833.76.377	6.2				
	1850	96	50	>90	>50	833.76.378	–	833.76.382	4.6	1.00	2.00	–	4.60
	2015	105	50	>90	>50	833.76.379	–	833.76.383	4.6				
	2050	107	50	>90	>50	833.76.380	–	833.76.384	4.6				
	2100	109	50	>90	>50	833.76.381	–	833.76.385	4.6				
	415	86	50	>90	>50	833.74.344	833.74.348	–	6.0	4.10	8.30	12.50	–
	440	92	50	>90	>50	833.74.345	833.74.349	–	6.0				
	455	95	50	>90	>50	833.74.346	833.74.350	–	6.0				
	460	96	50	>90	>50	833.74.347	833.74.351	–	6.0				
	415	86	50	>90	>50	833.76.324	833.76.328	–	12.0	4.10	8.30	–	18.70
	440	92	50	>90	>50	833.76.325	833.76.329	–	12.0				
	455	95	50	>90	>50	833.76.326	833.76.330	–	12.0				
	460	96	50	>90	>50	833.76.327	833.76.331	–	12.0				
	820	85	50	>90	>50	833.76.342	833.76.346	–	8.0	2.00	4.10	–	9.30
	870	91	50	>90	>50	833.76.343	833.76.347	–	8.0				
	900	94	50	>90	>50	833.76.344	833.76.348	–	8.0				
	930	97	50	>90	>50	833.76.345	833.76.349	–	8.0				






For quick selection of linear light, see page 2


LED strip lights


Technical data, multi-white 8 mm / RGB 10 mm

	Voltage V	Model Häfele Loox5	Quantity LEDs/m	Colour temper- ature K	Illuminance lx Distance				Watt- age W/m
					250 mm	500 mm	750 mm	1000 mm	



	5 12V	LED 2064	2 x 60	2700	1025	425	230	145	4.8	
				5000	1075	445	245	150		
		LED 2070	2 x 120	2700	1865	785	430	270	9.6	
				5000	2045	865	475	295		
	5 24V	LED 3044	2 x 120	2700	1025	425	230	145	4.8	
				5000	1075	445	245	150		
			LED 3047	2 x 120	2700	1865	785	430	270	9.6
					5000	2045	865	475	295	
			LED 3049	2 x 120	2700	2780	1180	650	405	14.4
					5000	2800	1200	660	415	



	5 12V	LED 2080	120	RGB	-	-	-	-	9.6
	5 24V	LED 3080	120	RGB	-	-	-	-	9.6

	Luminous flux lm/m	Luminous efficacy lm/W	Section length mm	Colour rendering index CRI		Available length			Max. strip length (visual) m	Max. strip length wattage-dependent m on the Loox5 driver			
				R _a	R ₉	5 m	15 m	50 m		20 W	40 W	60 W	90W
	425	89	50	>90	>50	833.74.352	-	833.74.353	4.5	4.10	8.30	12.50	-
	465	97											
	825	86	25	>90	>50	833.74.370	-	833.74.371	3.5	2.00	4.10	6.20	-
	930	97											
	425	89	50	>90	>50	833.76.332	-	833.76.333	8.5	4.10	8.30	-	18.70
	465	97											
	825	86	50	>90	>50	833.76.350	-	833.76.351	6.5	2.00	4.10	-	9.30
	930	97											
	1230	85	50	>90	>50	833.76.360	-	833.76.361	5.0	1.30	2.70	-	6.20
	1370	95											
	530	51	25	-	-	833.74.380	-	-	3.0	2.00	4.10	6.20	-
	530	51	50	-	-	833.76.386	-	-	6.5	2.00	4.10	-	9.30



For quick selection of linear light, see page 2

Light shapes rooms.

Light in furniture is more than just accessories.






• Light in furniture is no longer an accessory
• which can be retrofitted later. Today, light has
• essential and imperative comfort functions in
• furniture.
• Contemporary furniture planning incorporates
• light as a focus right from the beginning in
• order to achieve the best possible result for
• customers.

Light changes spaces.

The interplay of light in rooms and light in furniture promotes a feeling of well-being.

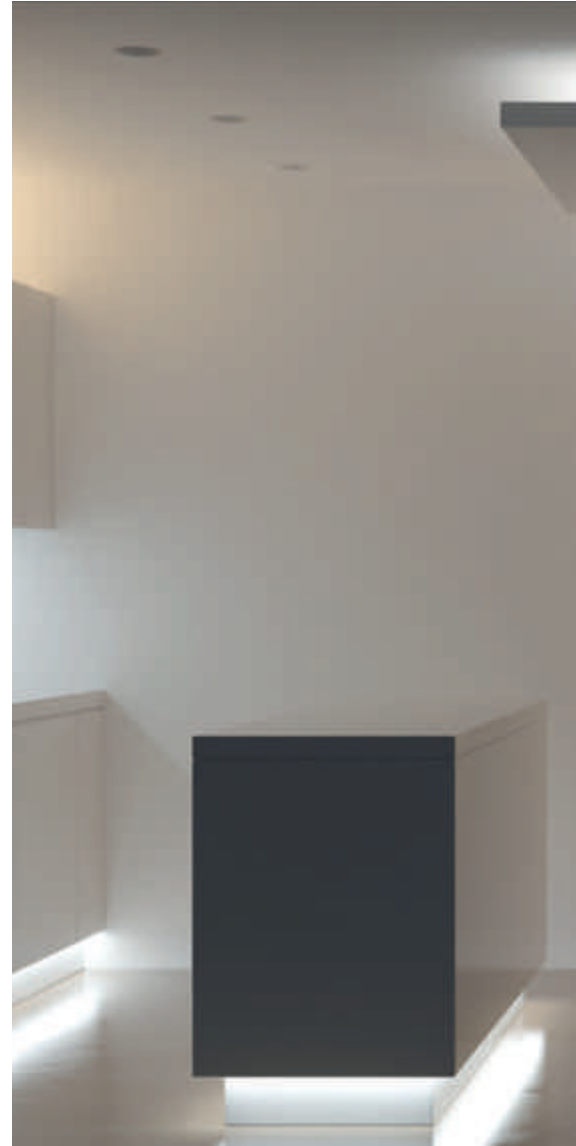

Cooking.


Bright, neutral white light makes for a pleasant illumination of the important work spaces and ensures the proper reflection of the colour of food and products.

Eating.

The combination of direct, flat light for a perfect illumination of the dining table, supplemented with indirect, warm effect lights on ceilings and walls creates an atmospheric ambience.

Relaxation.

The interaction of areas of light and horizons created by light creates a comfortable and cozy atmosphere.

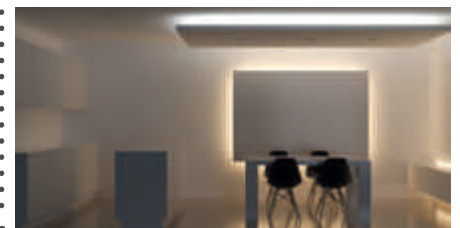

Light and intensity.

When lighting a room, using a combination of several light sources is critical.

In the 1950s, Richard Kelly, a pioneer of lighting design, already differentiated between light to see – ambient luminescence, focal glow – the illumination of an object or area, and play of brilliants – in which the light itself is the object to observe.




Depending on the purpose for the lighting plan of a room and specific areas, task light is used. To create a specific ambiance ambient light is used.



Task light.

For example, the lighting need in a home office can differ and depends on the location of the desk as well as the influx of daylight. When work is done on computer or tablet a glare-free light source is required. Since the screen is the work area, a backlight can be sufficient. However, drawing or writing require a well lit work surface.

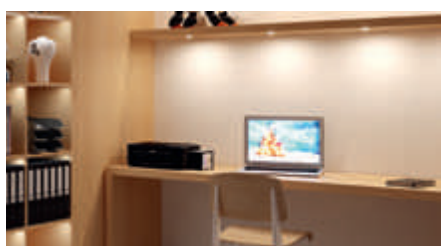


Ambient light.

To create an atmospheric ambience, the room light can also be used as indirect lighting in the furniture. Ambient light provides less illumination and serves to create an appealing environment. The light source is often hidden, for example it can be embedded in shelving or behind moldings. It is important that ambient light beams do not create brightly lit surfaces or produce sharp edges.



Light evokes emotions.

Light situations trigger associations: romantic, comfortable, relaxing and cold.

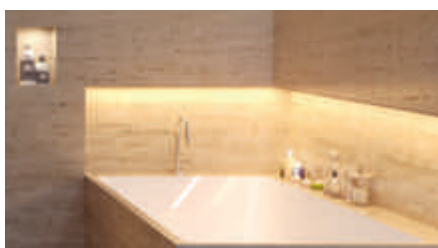

Staging.

Spotlights make the illuminated objects on shelves and showcases the focus. And wall wash light makes wall structures visible.



Highlighting.

Highlighting functional areas with even, bright light is a sensible addition to the general room light.



Setting accents.

The Loox lighting system offers many possibilities to set accents in a room. With the appropriate light composition corners, edges and surfaces can be dramatized.

With a smart lighting plan specific moods can be created in the living environment. The Häfele Loox system can turn a purposefully designed bathroom into a spa. Edge lighting creates an artificial horizon, dimmable spotlights create a candlelight atmosphere. Warm light creates a mood simulating a sunset.

Light and colour.



Light makes colour visible.

Light is made up of electromagnetic waves which only become visible to the human eye through reflection on objects. A red object reflects only the red colour. The other colours are absorbed. All light sources are tested and measured based on the accuracy of their colour reproduction, the so-called colour rendering index (CRI). The higher the CRI, the higher the quality of colour reproduction.

Warm light.



Cool light.

The colour of the light, also referred to as colour temperature, controls our state of well-being. Light with a high blue component has an invigorating effect on the body. Just like the cool fresh light of an early morning.

By comparison, strong red and yellow-coloured light has a relaxing effect and evokes a state of rest. Just like the warm glow in the late afternoon or a candle.

Consistent colour quality and performance.

An important factor for new technologies is the reliability in use.



Häfele has set high standards for the selection of materials, which are continually tested and certified internationally. Setting a narrow binning is one of them. All LEDs are tested and sorted to specified quality criteria after production. Häfele selects the highest quality class LEDs for maximum life time, energy efficiency and to ensure aftermarket replacement quality.

Light with effect.

Every room comes to life with light and shadows.



Linear light.

Linear illumination is created with LED strip lights. Inside cabinets and shelves, on work surfaces or enclosures of furniture, LED strip lights provide uniform light with a broad area of illumination.



Directional light.

Narrow beam Loox spotlights can create directional lighting effects to highlight specific objects. With surface mounted or built-in spotlights in a row it is possible to achieve flat surface illumination of specific areas. A special effect is created by overlapping cones of light.


Linear illumination can be used to create horizons. With direct light objects can be partially emphasized. Wall wash light can highlight and reinforce structures (stone structures, relief wallpapers).

Light and surfaces.




Depending on the material and structure a surface reacts differently to light. Light is partially absorbed, a part is reflected and depending on the surface it is scattered. With translucent or transmissive materials, the light can also shine through the body.

Depending on the material and structure a surface reacts differently to light.

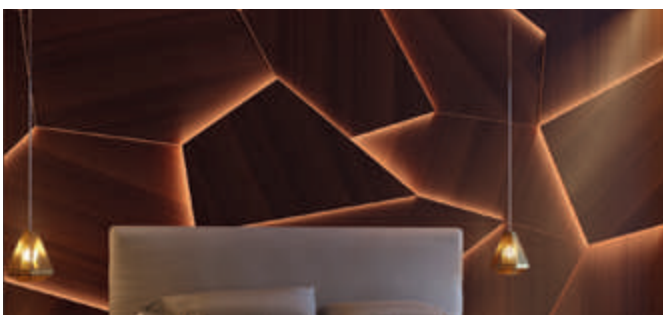

Dark surfaces.

Dark materials absorb light, so it is necessary to use stronger light. However, too much light destroys the ambiance and comfort.

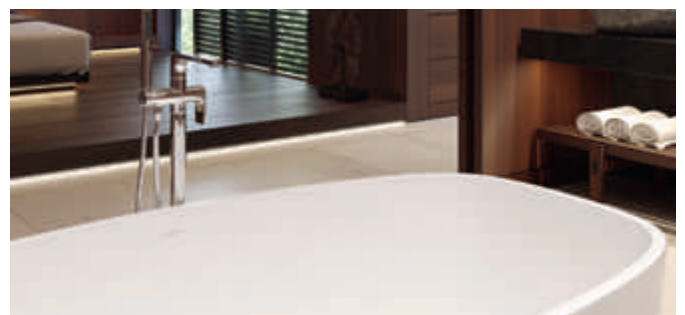

Bright surfaces.

A bright floor or bright materials reflect the light much better than dark materials. A brightly designed space therefore requires less overall light. Extra effect lighting adds freshness and a feeling of spaciousness to the room.

Light and control.

A Smart Home also includes the smart control of different lighting scenarios inside the building.

The Häfele Loox system offers several solutions for controlling lights; from the direct control via simple switching points to the remote control of more complex lighting scenarios.



In addition to the lighting, digital solutions can also be used to centrally operate and control the stereo, television, heating, alarm system and more.



Remote control of light.

Especially important is the control of light scenarios in multi-functional rooms. Depending on the application remote controls can be used for easy control of several light sources, from multi-white lights to coloured RGB lights.


Control light (and more) centrally.

An app connects and centrally controls all installed light components and allows the design of light effects individually with a smartphone or tablet. In this way multiple scenarios can be saved and programmed, or simply retrieved with just by finger tip.



Light effects and lighting technology

Cone of light

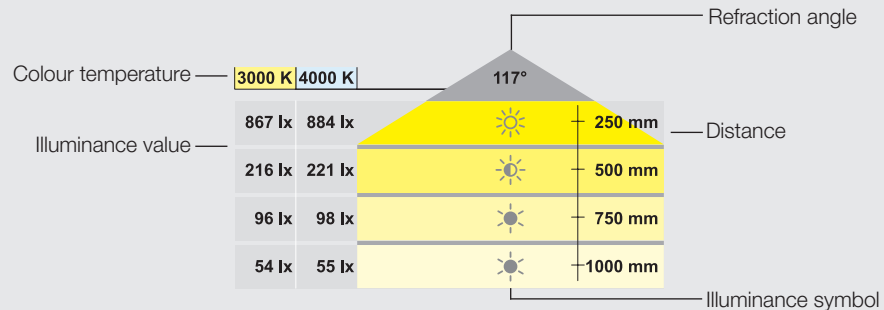

	>500 lx
	150–500 lx
	<150 lx



Note:





The illuminance symbol always represents the best value of all colour temperatures and is meant to be for quick guidance only. Please note the specific values of the individual colour temperatures and the refraction angle before ordering!

Recommendation for illumination of interior rooms

Interior room type	Illuminance in Lux at 500 mm	Colour temperature
Kitchen, dining area	300–500	2700–4000 K
Store fixtures, galleries	300–500	4000–6500 K
Bedroom, living room	200–300	2700–4000 K
Bathroom	200–500	3500–4000 K
Storage room	100	4000–5000 K
Orientation light, hallway, wardrobe	10–50	4000–5000 K

Test symbols and symbols

Product features

-  Dimmable
-  RGB light
-  Multi-white light
-  Bluetooth®: Industry standard for data transmission between electronic devices by radio over a short distance. The Bluetooth® word mark and logos are registered trademarks of Bluetooth SIG, Inc., and Häfele uses these marks under licence. Other trademarks and names are the propriety of their respective owners.



Test symbol

-  TÜV seal of quality
-  Confirmation from manufacturer that the product complies with the product-specific applicable European norms and standards. Häfele will not use the certification in advertising.
- RoHS** Restriction of Hazardous Substances (EU directive 2011/65/EU). Häfele will not use the certification in advertising.
-  Underwriters Laboratories, correspondence with the national standards in the USA and Canada
-  Energy efficiency standard VI of the United States Department of Energy
-  Product Safety Electrical Appliance and Material Safety Law (for Japan)
-  Regulatory Compliance Mark (for Australia)
-  China Compulsory Certification
- ERC** Eurasian Conformity, for CU countries (Russia, Kazakhstan, Belarus)
-  Korea Certification Mark
-  Bureau of Standards, Metrology & Inspection BSMI (for Taiwan)
-  Thai Industrial Standards Institute TISI
-  European Norms Electrical Certification, with indication of the testing laboratory (one of 18 European national institutes)
- FC** Declaration of Conformity for telecommunication and radio equipment (USA)
-  Telecommunication and Radio Equipment (Japan)







Protection classes

-  Protection class II
-  Protection class III



Degrees of protection

- IP20** Only for use in dry locations
- IP44** Penetration by solid foreign bodies $\varnothing \geq 1$ mm is prevented. Water spray protection (water from all directions)
- IP65** Dustproof, protection from water spray (jet) from any angle.
-  IP44 after installation
-  IP65 after installation

Safety symbols



-  Installation permitted on or in furniture, whose ignition properties are unknown.
-  Max. surface temperature in case of fault
-  Lights to be used indoors only. Not to be used outdoors!
-  Do not use components that impede thermal radiation.
-  Waste of Electrical and Electronic Equipment. Do not dispose of in residential waste!
-  Driver, converts alternating current to direct current

Voltage supply

- SELV** Safety Extra Low Voltage
-  Independent operating unit for use outside of light without additional cover.
-  Short-circuit proof with safety isolation

Technical terms

Technical terms

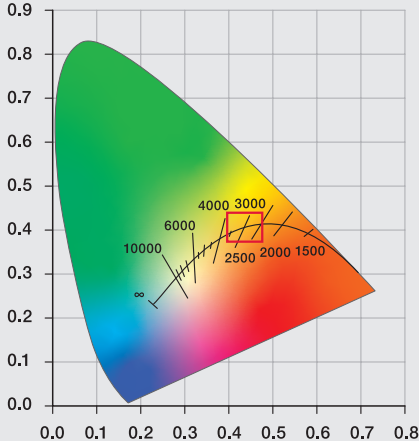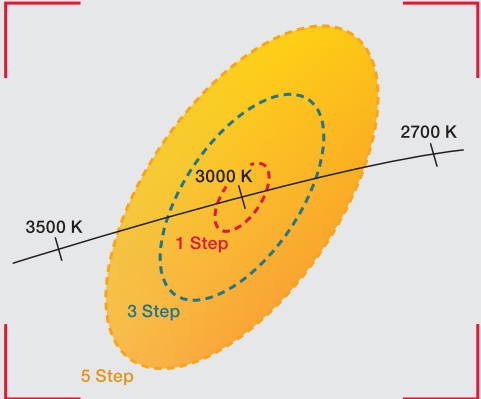
Refraction angle	The refraction angle (beam angle) describes the angle between two imagined straight lines in a plane through the visual beam axis, whereby these straight lines go through the centre of the front of the lamp and through the points at which the illuminance is 50% of the illuminance on the visual beam axis.														
Illuminance	The illuminance is the luminous flux (lm) in relation to a surface (m ²) and it is indicated in Lux (lx). It is used to measure the brightness with which a surface is illuminated.														
Binning	During industrial manufacture, LEDs differ from each other with regard to colour, luminous flux (brightness) and forward voltage. In order to achieve consistent light quality with the same brightness level and a uniform light colour, they are therefore sorted according to colour, luminous flux and forward voltage and separated into bins ("containers") during manufacture. This sorting process is known as Binning. Häfele exclusively uses bins with a high degree of brightness in order to achieve high efficiency.														
Bluetooth® Mesh	Network technology which was introduced in 2017, based on Bluetooth® Low Energy, in which all components (controls, devices) form a joint network, which is ideal for controlling lights. Häfele Connect Mesh uses this technology.														
Energy efficiency class	The energy efficiency class provides information about the relevant energy consumption. Lamps and lights are categorised in classes E to A++. LED lights achieve the highest classes A to A++.														
Colour temperature and light colour	The colour temperature is a specification of the colour appearance of a white light source and is measured in Kelvin (K). The lower the colour temperature, the warmer the light colour; the higher the colour temperature, the cooler the light colour. White light sources with a colour temperature below 3400 K are considered "warm white" by Häfele, white light sources with a colour temperature between 3400 K and 5700 K are considered "cool white". White light sources above 5700 K are referred to as "daylight white".														
Colour consistency/ colour differences	<div style="display: flex; justify-content: space-around;">   </div> <p>Colour differences are specified in stages, so called "MacAdams Ellipses" or "SDCM" (Standard Deviation of Colour Matching). Häfele uses 3 SDCM binnings for its LED products. This is a good value, because it is statistically unlikely that LEDs with a maximum colour difference will be next to each other on the strip light or in the light and that the colour difference is visible. In its ErP directive, the EU Commission stipulates that 6 SDCMs may not be exceeded for LED products.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">SDCM</th> <th style="text-align: left;">Visibility</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Only people with extremely good vision can see the most minimal colour differences.</td> </tr> <tr> <td>2</td> <td>Most minimal colour differences are visible.</td> </tr> <tr> <td>3</td> <td>Very small colour differences are visible.</td> </tr> <tr> <td>4</td> <td>Colour differences are visible.</td> </tr> <tr> <td>5</td> <td>Significant colour differences are visible.</td> </tr> <tr> <td>>5</td> <td>Very clear colour differences are visible.</td> </tr> </tbody> </table>	SDCM	Visibility	1	Only people with extremely good vision can see the most minimal colour differences.	2	Most minimal colour differences are visible.	3	Very small colour differences are visible.	4	Colour differences are visible.	5	Significant colour differences are visible.	>5	Very clear colour differences are visible.
SDCM	Visibility														
1	Only people with extremely good vision can see the most minimal colour differences.														
2	Most minimal colour differences are visible.														
3	Very small colour differences are visible.														
4	Colour differences are visible.														
5	Significant colour differences are visible.														
>5	Very clear colour differences are visible.														
Colour rendering index CRI	The colour rendering index is a parameter that can be used to compare the colour rendering quality of light sources at the same colour temperature. The higher the value, the better the colour rendering. A value of 100 corresponds to the colour rendering of daylight.														
Weighted energy consumption	The weighted energy consumption is rounded to two decimal places in kilowatt hours in relation to 1,000 hours of use. It applies to operation of the LED with an external driver. The calculation and publication of this value is defined by EU ordinance No. 874/2012.														

Technical terms

Constant current technology	The same current flows through each LED. That means that the brightness of all LEDs is the same, and a drop in luminous flux is prevented. This increases the maximum visual length of the strip lights.																												
Life time	Specified in operating hours. The life time mainly depends on the warming of the products. The hotter the environment, the shorter the life time. The replacement rate in years is calculated from the total life time and the average operating time per annum. The following table can be used as a planning aid. The specified life time relates to L70/B50. <table border="1" data-bbox="470 593 1380 846"> <thead> <tr> <th>Indoor use</th> <th>Annual operating time (EN 15193) hours</th> <th>Replacement rate Years</th> <th>Life time installation Hours</th> </tr> </thead> <tbody> <tr> <td>Office</td> <td>2,500</td> <td>20</td> <td>50,000</td> </tr> <tr> <td>Education</td> <td>2,000</td> <td>25</td> <td>50,000</td> </tr> <tr> <td>Hospital</td> <td>5,000</td> <td>10</td> <td>50,000</td> </tr> <tr> <td>Hotel</td> <td>5,000</td> <td>10</td> <td>50,000</td> </tr> <tr> <td>Restaurant</td> <td>2,500</td> <td>10</td> <td>25,000</td> </tr> <tr> <td>Shop</td> <td>5,000</td> <td>10</td> <td>50,000</td> </tr> </tbody> </table>	Indoor use	Annual operating time (EN 15193) hours	Replacement rate Years	Life time installation Hours	Office	2,500	20	50,000	Education	2,000	25	50,000	Hospital	5,000	10	50,000	Hotel	5,000	10	50,000	Restaurant	2,500	10	25,000	Shop	5,000	10	50,000
Indoor use	Annual operating time (EN 15193) hours	Replacement rate Years	Life time installation Hours																										
Office	2,500	20	50,000																										
Education	2,000	25	50,000																										
Hospital	5,000	10	50,000																										
Hotel	5,000	10	50,000																										
Restaurant	2,500	10	25,000																										
Shop	5,000	10	50,000																										
Life time L80/B10	L80 is the time after which the LED is still emitting 80 % of its original light. B10 means that 10 % of the LEDs may have less than 80 % of the original light output. Häfele tests all LEDs it uses in accordance with the LM-80 standard. LM-80 is a standardised testing method, which allows products to bear the EPA's (Environmental Protection Agency) Energy Star. The test is a manufacturer-independent comparison of LEDs. During the test the luminous flux (Lumen maintenance) of an LED is tested at three different temperatures for a minimum of 6,000 hours. Then the life time L80 is calculated by means of extrapolation. The extrapolation procedure is described in regulation IES TM-21.																												
LED	A light-emitting diode (LED) is a semi-conductor element that emits light when electricity passes through it. This semi-conductor element consists of a crystal that is attached to a metal base, and both are encapsulated in protective plastic. LEDs are mostly based on inorganic, i.e. non-carbonic materials.																												
Luminous efficacy	The luminous efficacy is the ratio of the luminous flux and the wattage absorbed. It is used to measure the operating efficiency of the light source. It is indicated in Lumen per Watt (lm/W).																												
Luminous flux	It is indicated in Lumen (lm). The luminous flux indicates the light output, i.e. the quantity of light a source emits. The value may be subject to measurement and production-related fluctuations of $\pm 10\%$.																												
Drop in luminous flux	The brightness of the LEDs on LED strip lights decreases with the length of the strip light due to the increasing resistance of the copper line. A drop in luminous flux from the first to the last LED of up to 30% is imperceptible to the human eye. That's why Häfele specifies a maximum strip light length for this visual value. Generally, it is possible to operate strip lights with longer lengths, but a difference in brightness will be visible. Exception: The LEDs of the strip lights with constant current technology (LED 2077/3050/3051/3052) always have the same brightness.																												
Max. strip light length	<p>Visual value Strip light length with an imperceptible drop in luminous flux of max. 30%.</p> <p>Wattage-dependent value Strip light length = output power of driver / wattage of the strip light per meter. If the wattage-dependent value is greater than the visual value, a difference in brightness will be perceivable. Exception: The LEDs of the strip lights with constant current technology (LED 2077/3050/3051/3052) always have the same brightness.</p>																												
Multi-white	The light colour of shades of white can be changed as required with Häfele Connect. Mesh, e.g. from warm white to cool white.																												
RGB	RGB is the abbreviation for red, green and blue. In combination with Häfele Connect Mesh, almost any colour combination can be created from the three primary colours.																												
RoHS – Lead in Loox products	Loox Products by Häfele are lead-free and adhere to the RoHS guidelines. RoHS is part of CE conformity. All Loox products are CE compliant. Häfele does not advertise the CE conformity in its catalogues, since only CE compliant products are allowed to be offered. The declaration of conformity is available online at www.hafele.com																												
Transmittance	Ratio of transmitted light to incidental light. An ideal transparent body would have a transmittance of 100 %.																												

Technical questions

Technical questions

<p>How do I clean an LED strip light?</p>	<p>LED strip lights without a silicone sleeve do not require cleaning. Silicone strip lights can be wiped down with a damp antistatic cloth. Scouring agents and aggressive cleaners can destroy the surface and attack the LEDs.</p>																																				
<p>May I use drivers from other manufacturers?</p>	<p>In order to ensure the safety and functionality of the installation, only Loox drivers or drivers that have been explicitly approved by Häfele may be used. If an electronics technician installs the system, Loox can also be connected and coupled with on-site electrical equipment. However, we explicitly point out that these tasks must be performed by a qualified electrician.</p>																																				
<p>What is the life time of the products in permanent operation?</p>	<p>Loox5 drivers >50,000 hrs. with max. ambient temperature (40 °C/45 °C), wall plug drivers 30,000 hrs. at an ambient temperature of max. 40 °C. Provide for sufficient air supply and circulation at the mounting location of the driver. Loox5 LED strip lights >50,000 hrs. at an ambient temperature of max. 45 °C. Cooling with an aluminium profile is recommended from 9.6 W/m.</p>																																				
<p>Can the multi switch box, the multi driver box and the 3-way distributor with switching function be connected in series multiple times?</p>	<p>No, because the signals can no longer be transmitted properly.</p>																																				
<p>Can 12 V and 350 mA lights or 12 V and 24 V lights be used together?</p>	<p>Yes, please use our respective converter. (converters see chapter Supplying)</p>																																				
<p>How can sensor switch malfunctions be avoided (Ø 12 mm)?</p>	<p>Check for correct switch installation. The TOP lettering on the switch must point upwards in the installation situation.</p>																																				
<p>How is consistent bulb light colour guaranteed?</p>	<p>Häfele makes high demands on the selection of the materials. All Loox5 strip lights contain high-quality and long-lasting LEDs from Samsung and Lumileds. Setting very tight quality specifications ensures not only luminous flux and breakdown voltage, but also consistent light colour for follow-up purchases.</p>																																				
<p>What is the maximum wattage that I can connect to a device output of the driver?</p>	<p>With 12 V systems it is 12 V x 5.0 A = 60 W with a 60 W driver With 24 V systems it is 12 V x 3.75 A = 90 W with a 90 W driver</p>																																				
<p>How long may the lead between the driver and the device be?</p>	<p>The maximum lead length from the Loox5 driver to the device is 10 m. Long cable lengths in combination with large loads (strip light lengths) can result in voltage losses in the cable. These lead to visible loss of brightness in the lights. The illuminance listed with the lights has been determined with the rated output voltage of the driver. (12 V or 24 V).</p>																																				
<p>What is AWG?</p>	<p>AWG stands for American Wire Gauge. It is the coding for wire diameters in electrical leads that are mainly used in North America. This identifies the cross-section of wires in electrical leads that consist of strands and wire.</p>																																				
<p>What is the current carrying capacity of my cable?</p>	<p>Häfele allows the following current carrying capacity and wattage:</p> <table border="1" data-bbox="469 1532 1305 1675"> <thead> <tr> <th>Type of cable</th> <th colspan="2">24 AWG</th> <th colspan="2">22 AWG</th> <th colspan="2">20 AWG</th> <th colspan="2">18 AWG</th> </tr> </thead> <tbody> <tr> <td>Current carrying capacity</td> <td colspan="2">1.5 A</td> <td colspan="2">2.5 A</td> <td colspan="2">3.5 A</td> <td colspan="2">5.0 A</td> </tr> <tr> <td>Voltage</td> <td>12 V</td> <td>24 V</td> <td>12 V</td> <td>24 V</td> <td>12 V</td> <td>24 V</td> <td>12 V</td> <td>24 V</td> </tr> <tr> <td>Wattage</td> <td>18 W</td> <td>36 W</td> <td>30 W</td> <td>60 W</td> <td>42 W</td> <td>84 W</td> <td>60 W</td> <td>110 W</td> </tr> </tbody> </table> <p>The type of cable is imprinted on the coating of the cable.</p> 	Type of cable	24 AWG		22 AWG		20 AWG		18 AWG		Current carrying capacity	1.5 A		2.5 A		3.5 A		5.0 A		Voltage	12 V	24 V	12 V	24 V	12 V	24 V	12 V	24 V	Wattage	18 W	36 W	30 W	60 W	42 W	84 W	60 W	110 W
Type of cable	24 AWG		22 AWG		20 AWG		18 AWG																														
Current carrying capacity	1.5 A		2.5 A		3.5 A		5.0 A																														
Voltage	12 V	24 V	12 V	24 V	12 V	24 V	12 V	24 V																													
Wattage	18 W	36 W	30 W	60 W	42 W	84 W	60 W	110 W																													
<p>Can an LED flexible strip light be used behind acrylic glass?</p>	<p>Yes, however the acrylic glass increases the colour variations (binning) up to four times and minimal colour deviations are therefore more visible.</p>																																				
<p>Can Loox lights be operated using multiple switches?</p>	<p>Yes, please use the multi switch box to do this. Up to three switches can be connected to the multi switch box (multi switch box see page 114).</p>																																				
<p>Why do the lights have to be plugged in first before connecting the high voltage mains plug?</p>	<p>If the driver is connected to the mains first, electrical power is output at the secondary side, which leads to overvoltage and therefore damage to the lights if they are connected.</p>																																				
<p>Can Loox lights be used in RVs/boats/cars?</p>	<p>Yes, for sure. We have special IC strip lights that compensate for voltage fluctuations of the vehicles without problems. Our regular LED strip lights can be used as well. It is important to note, however, that the voltage peaks may reduce the life time.</p>																																				

Technical questions

Can I use Loox in a sauna/bathroom?

We offer special lights that offer IP44 protection when installed. This is sufficient for many applications. Our LED silicone strip lights are IP44 protected as well. However, it must be ensured that the driver and mains lead are dry. Furthermore, a maximum ambient temperature of 45 degrees must be ensured.

Why does my LED light flash?


Flashing is a sign of (under or) overloading.
Use a driver with higher power or reduce the number of devices.

Documentation on the Internet

Video guides

Language neutral for all markets

Language-independent videos are available for the Loox radio remote controls and other selected products at www.hafele.com next to the item.

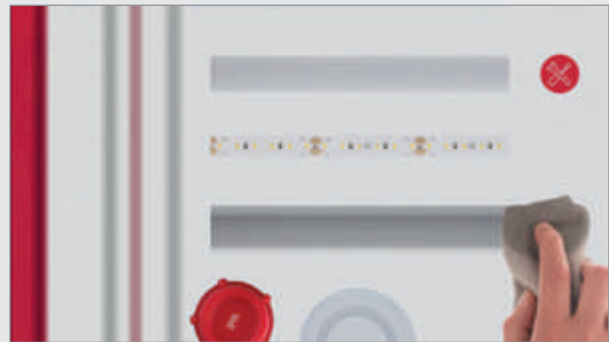

Installation instructions

Language neutral for all markets

HÄFELE

LED 3010

833.75.040
833.75.041
833.75.042

3kV	K	W	T _A	mm	mm	
833.75.040	3000 K	3,25 W	-20 °C – +35 °C -4 °F – +95 °F	Ø 65 x 12	≥ Ø 75 x 22	833.77.900
833.75.041	4000 K					833.77.901
833.75.042	6000 K					833.77.912 833.77.913 833.77.914 833.77.915

Language neutral installation instructions are provided for all Häfele Loox lighting systems.

RoHS, CE, IP20

1/2

Energy efficiency class

Label in all EU languages

HÄFELE 833.75.040
LED 3010

This luminaire contains built-in LED lamps.

A+
A+
A
C
D
E

LED

The lamps cannot be changed in the luminaire.

874/2012

Labels are available for downloading in all EU languages for all Loox lighting systems at www.hafele.com.

Article index

Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page
002.99.032	100	833.72.283	50	833.72.852	28	833.74.350	15, 129	833.75.040	66
002.99.034	100	833.72.284	50	833.72.853	28	833.74.351	15, 129	833.75.041	66
802.07.200	32	833.72.285	50	833.72.854	22	833.74.352	17, 131	833.75.042	66
803.33.757	32	833.72.286	50	833.72.855	22	833.74.353	17, 131	833.75.090	70
822.65.001	84	833.72.287	50	833.72.858	35	833.74.354	11, 127	833.75.091	70
822.65.034	85	833.72.288	50	833.72.859	35	833.74.355	11, 127	833.75.100	68
822.65.039	85	833.72.300	47	833.72.898	34	833.74.356	11, 127	833.75.101	68
833.72.040	52	833.72.301	47	833.72.899	34	833.74.357	11, 127	833.75.120	47
833.72.041	52	833.72.302	47	833.73.110	57	833.74.358	11, 127	833.75.121	47
833.72.042	52	833.72.310	49	833.73.111	57	833.74.359	11, 127	833.75.122	47
833.72.043	52	833.72.311	49	833.73.750	48	833.74.360	11, 127	833.75.130	49
833.72.044	52	833.72.323	39	833.73.751	83	833.74.361	11, 127	833.75.131	49
833.72.045	52	833.72.333	43	833.73.752	83	833.74.362	11, 127	833.75.140	47
833.72.050	60	833.72.340	47	833.73.753	83	833.74.363	11, 127	833.75.141	47
833.72.051	60	833.72.341	47	833.73.754	83	833.74.364	11, 127	833.75.142	47
833.72.052	60	833.72.342	47	833.73.755	83	833.74.365	11, 127	833.75.150	47
833.72.060	54	833.72.350	39	833.73.756	83	833.74.366	11, 127	833.75.151	47
833.72.061	54	833.72.351	39	833.73.776	83	833.74.367	11, 127	833.75.152	47
833.72.062	54	833.72.352	39	833.74.030	59	833.74.369	11, 127	833.75.160	49
833.72.064	54	833.72.370	43	833.74.031	59	833.74.370	17, 131	833.75.170	45
833.72.065	54	833.72.371	43	833.74.040	58	833.74.371	17, 131	833.75.171	45
833.72.066	54	833.72.372	43	833.74.041	58	833.74.372	13, 129	833.75.172	45
833.72.091	56	833.72.380	39, 41	833.74.070	36	833.74.373	13, 129	833.75.173	45
833.72.092	56	833.72.381	39, 41	833.74.080	36	833.74.374	13, 129	833.75.174	39
833.72.124	39, 41	833.72.382	39, 41	833.74.096	62	833.74.375	13, 129	833.75.175	39
833.72.125	39, 41	833.72.383	39, 41	833.74.097	62	833.74.376	13, 129	833.75.176	39
833.72.126	39, 41	833.72.384	39, 41	833.74.100	64	833.74.377	13, 129	833.75.177	39
833.72.127	39, 41	833.72.385	39, 41	833.74.110	64	833.74.378	13, 129	833.75.178	41
833.72.143	43	833.72.390	47	833.74.120	33	833.74.379	13, 129	833.75.705	115
833.72.144	43	833.72.391	47	833.74.127	79	833.74.380	19, 131	833.75.706	115
833.72.145	43	833.72.392	47	833.74.130	33	833.74.709	120	833.75.707	115
833.72.146	43	833.72.400	49	833.74.152	63	833.74.733	32	833.75.732	115
833.72.160	39, 41	833.72.470	45	833.74.153	63	833.74.746	120	833.75.743	110
833.72.162	39, 41	833.72.471	45	833.74.160	61	833.74.747	120	833.76.300	9, 127
833.72.163	39, 41	833.72.472	45	833.74.161	61	833.74.748	120	833.76.301	9, 127
833.72.164	39, 41	833.72.473	45	833.74.320	9, 127	833.74.749	120	833.76.302	9, 127
833.72.166	39, 41	833.72.474	39	833.74.321	9, 127	833.74.780	35	833.76.303	9, 127
833.72.167	39, 41	833.72.475	39	833.74.322	9, 127	833.74.781	35	833.76.304	9, 127
833.72.168	39, 41	833.72.476	39	833.74.323	9, 127	833.74.795	117	833.76.305	9, 127
833.72.170	39, 41	833.72.477	39	833.74.324	9, 127	833.74.796	117	833.76.306	9, 127
833.72.171	39, 41	833.72.478	41	833.74.325	9, 127	833.74.797	117	833.76.307	9, 127
833.72.172	39, 41	833.72.716	115	833.74.326	9, 127	833.74.812	30	833.76.308	9, 127
833.72.174	39, 41	833.72.717	115	833.74.327	9, 127	833.74.813	29	833.76.309	9, 127
833.72.175	39, 41	833.72.718	115	833.74.328	9, 127	833.74.814	35	833.76.310	9, 127
833.72.176	43	833.72.742	115	833.74.329	9, 127	833.74.822	30	833.76.311	9, 127
833.72.178	43	833.72.790	32	833.74.330	9, 127	833.74.823	29	833.76.312	9, 127
833.72.179	43	833.72.800	51	833.74.331	9, 127	833.74.825	30	833.76.313	9, 127
833.72.180	43	833.72.801	51	833.74.332	9, 127	833.74.826	30	833.76.314	9, 127
833.72.182	43	833.72.802	47, 49, 51	833.74.333	9, 127	833.74.832	28, 29	833.76.315	9, 127
833.72.183	43	833.72.803	47, 49	833.74.334	9, 127	833.74.833	28, 29	833.76.316	11, 127
833.72.184	43	833.72.804	47, 49	833.74.335	9, 127	833.74.834	29	833.76.317	11, 127
833.72.186	43	833.72.830	53	833.74.336	11, 127	833.74.835	31	833.76.318	11, 127
833.72.187	43	833.72.831	53	833.74.337	11, 127	833.74.877	31	833.76.319	11, 127
833.72.188	43	833.72.832	53	833.74.338	11, 127	833.74.893	31	833.76.320	11, 127
833.72.190	43	833.72.833	53	833.74.339	11, 127	833.74.898	30	833.76.321	11, 127
833.72.191	43	833.72.834	55	833.74.340	11, 127	833.74.899	30	833.76.322	11, 127
833.72.192	39, 41	833.72.835	55	833.74.341	11, 127	833.74.933	120	833.76.323	11, 127
833.72.193	39, 41	833.72.840	28	833.74.342	11, 127	833.74.934	120	833.76.324	15, 129
833.72.194	39, 41	833.72.841	28	833.74.343	11, 127	833.74.935	120	833.76.325	15, 129
833.72.195	39, 41	833.72.842	28	833.74.344	15, 129	833.74.936	120	833.76.326	15, 129
833.72.196	39, 41	833.72.843	28	833.74.345	15, 129	833.74.937	120	833.76.327	15, 129
833.72.197	39, 41	833.72.844	22	833.74.346	15, 129	833.74.947	125	833.76.328	15, 129
833.72.280	50	833.72.845	22	833.74.347	15, 129	833.74.957	120	833.76.329	15, 129
833.72.281	50	833.72.846	22	833.74.348	15, 129	833.74.958	120	833.76.330	15, 129
833.72.282	50	833.72.847	22	833.74.349	15, 129	833.74.959	120	833.76.331	15, 129

Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page
833.76.332	17, 131	833.77.230	79	833.89.126	88	833.89.249	45	833.95.740	34
833.76.333	17, 131	833.77.700	35	833.89.127	87	833.89.251	31	833.95.741	34
833.76.334	11, 127	833.77.721	48	833.89.128	87	833.89.252	31	833.95.742	106
833.76.335	11, 127	833.77.730	67	833.89.129	87	833.89.253	31	833.95.743	106
833.76.336	11, 127	833.77.731	67	833.89.133	88	833.89.254	31	833.95.745	99
833.76.337	11, 127	833.77.786	48	833.89.134	89	833.89.256	116	833.95.746	99
833.76.338	11, 127	833.77.787	48	833.89.135	89	833.89.257	116	833.95.747	104
833.76.339	11, 127	833.77.830	99	833.89.136	89	833.89.258	116	833.95.748	104
833.76.340	11, 127	833.77.831	99	833.89.137	89	833.89.259	116	833.95.750	90
833.76.341	11, 127	833.77.832	104	833.89.140	108	833.89.260	116	833.95.751	90
833.76.342	15, 129	833.77.833	104	833.89.141	108	833.89.261	116	833.95.752	115
833.76.343	15, 129	833.77.835	90	833.89.142	108	833.89.262	116	833.95.753	114
833.76.344	15, 129	833.77.836	90	833.89.143	91	833.89.263	116	833.95.754	35
833.76.345	15, 129	833.77.837	115	833.89.144	93	833.89.264	116	833.95.755	35
833.76.346	15, 129	833.77.838	114	833.89.184	15	833.89.265	116	833.95.756	35
833.76.347	15, 129	833.77.839	104	833.89.187	110	833.89.266	25	833.95.757	35
833.76.348	15, 129	833.77.934	125	833.89.188	112	833.93.736	110	833.95.758	35
833.76.349	15, 129	833.78.140	74	833.89.189	113	833.95.000	121	833.95.759	35
833.76.350	17, 131	833.78.142	74	833.89.190	109	833.95.002	121	833.95.760	35
833.76.351	17, 131	833.78.151	74	833.89.191	110	833.95.003	121	833.95.761	27
833.76.352	11, 127	833.78.154	74	833.89.192	110	833.95.008	122	833.95.762	24
833.76.353	11, 127	833.79.060	76	833.89.193	110	833.95.010	122	833.95.763	24
833.76.354	11, 127	833.79.061	76	833.89.194	109	833.95.011	122	833.95.764	26
833.76.355	11, 127	833.79.062	76	833.89.195	109	833.95.012	123	833.95.765	26
833.76.356	11, 127	833.79.063	76	833.89.196	109	833.95.022	123	833.95.766	20
833.76.357	11, 127	833.80.000	77	833.89.197	112	833.95.700	110	833.95.767	20
833.76.358	11, 127	833.80.001	77	833.89.198	112	833.95.701	110	833.95.768	20
833.76.359	11, 127	833.80.710	75	833.89.199	112	833.95.702	112	833.95.769	20
833.76.360	17, 131	833.80.711	75	833.89.200	113	833.95.703	111	833.95.770	21
833.76.361	17, 131	833.80.712	75	833.89.201	113	833.95.704	113	833.95.771	21
833.76.362	13, 129	833.80.713	75	833.89.202	113	833.95.705	109	833.95.772	23
833.76.363	13, 129	833.80.720	124, 125	833.89.203	111	833.95.706	110	833.95.773	23
833.76.364	13, 129	833.80.900	124	833.89.204	111	833.95.707	110	833.95.774	25
833.76.365	13, 129	833.80.901	124	833.89.205	111	833.95.708	112	833.95.775	25
833.76.366	13, 129	833.80.912	125	833.89.206	110	833.95.709	111	833.95.776	25
833.76.367	13, 129	833.87.012	80	833.89.207	109	833.95.710	113	833.95.777	25
833.76.368	13, 129	833.87.020	37	833.89.208	112	833.95.711	109	833.95.778	25
833.76.369	13, 129	833.87.021	81	833.89.209	113	833.95.712	105	833.95.779	25
833.76.370	13, 129	833.89.000	116	833.89.222	45	833.95.713	105	833.95.780	27
833.76.371	13, 129	833.89.001	116	833.89.223	45	833.95.714	105	833.95.781	27
833.76.372	13, 129	833.89.002	116	833.89.224	45	833.95.715	105	833.95.782	27
833.76.373	13, 129	833.89.003	116	833.89.225	45	833.95.716	105	833.95.783	27
833.76.374	13, 129	833.89.005	116	833.89.226	45	833.95.717	105	833.95.784	27
833.76.375	13, 129	833.89.006	116	833.89.227	45	833.95.718	105	833.95.785	27
833.76.376	13, 129	833.89.007	116	833.89.228	45	833.95.719	105	833.95.786	104
833.76.377	13, 129	833.89.009	116	833.89.229	45	833.95.720	105	833.95.787	107
833.76.378	13, 129	833.89.013	117	833.89.230	45	833.95.721	105	833.95.788	107
833.76.379	13, 129	833.89.016	116	833.89.231	45	833.95.722	20	833.95.789	107
833.76.380	13, 129	833.89.023	117	833.89.232	45	833.95.723	20	833.95.790	107
833.76.381	13, 129	833.89.033	117	833.89.233	45	833.95.724	20	833.95.791	17
833.76.382	13, 129	833.89.043	94	833.89.234	45	833.95.725	20	833.95.797	35
833.76.383	13, 129	833.89.046	92	833.89.235	45	833.95.726	21	850.00.040	100
833.76.384	13, 129	833.89.050	116	833.89.236	45	833.95.727	21	850.00.041	100
833.76.385	13, 129	833.89.058	88	833.89.237	45	833.95.728	23	850.00.042	98
833.76.386	19, 131	833.89.059	91	833.89.238	45	833.95.729	23	850.00.043	98
833.77.000	65	833.89.061	95	833.89.239	45	833.95.730	23	850.00.046	101
833.77.001	65	833.89.066	94	833.89.240	45	833.95.731	23	850.00.057	99
833.77.120	71	833.89.067	108	833.89.241	45	833.95.732	24	850.00.058	99
833.77.121	71	833.89.068	108	833.89.242	45	833.95.733	24	850.00.059	99
833.77.130	69	833.89.069	108	833.89.243	45	833.95.734	24		
833.77.131	69	833.89.090	92	833.89.244	45	833.95.735	24		
833.77.180	73	833.89.092	92	833.89.245	45	833.95.736	26		
833.77.181	73	833.89.106	92	833.89.246	45	833.95.737	26		
833.77.190	72	833.89.107	91	833.89.247	45	833.95.738	26		
833.77.191	72	833.89.108	91	833.89.248	45	833.95.739	26		

EUROPE

Headquarters

Germany
Häfele GmbH & Co KG
72202 Nagold
Phone: +49 74 52/95-0
info@hafele.de
www.hafele.de

Austria

Häfele Austria GmbH
5322 Hof bei Salzburg
Phone: +43 62 29/3 90 39-0
info@hafele.at
www.hafele.at

Belgium

Häfele Belgium N. V.
9240 Zele
Phone: +32 52/45 01 14
info@hafele.be
www.hafele.be

Croatia

Häfele Adriatic d.o.o.
Podružnica Zagreb
Kovinska 4A
HR-10090 Zagreb
Phone: + 385 (0) 1 3462 444
info-croatia@hafele.com
www.hafele.com

Czech Republic & Slovakia

Häfele Czech & Slovakia s.r.o.
15 500 Praha 5
Phone: +420 2/41 09 50 00
info@hafele.cz
www.hafele.cz

Denmark

Häfele Danmark A/S
7800 Skive
Phone: +45 97/51 15 22
info@hafele.dk
www.hafele.dk

Finland

Häfele GmbH & Co KG
Sivuliike Suomessa
15680 Lahti
Phone: +358 3/8 77 77-0
info@hafele.fi
www.hafele.fi

France

Häfele France s.à.r.l.
95157 Taverny Cédex
Phone: +33 1/30 40 54 50
info@hafele.fr
www.hafele.fr

Great Britain

Häfele U.K. Limited
Rugby, Warks. CV211RD
Phone: +44 17 88/54 20 20
info@hafele.co.uk
www.hafele.co.uk

Greece

Häfele GmbH & Co KG
Hellas Information Office
19014 Kapandriti
Phone: +30 2 10/6 17 95 44
info@hafele.gr
www.hafele.gr

Hungary

Häfele GmbH & Co KG
Marországi Képviseelő Iroda
1132 Budapest
Phone: +36 1/2 25 34 14
info-hungary@hafele.de
www.hafele.com

Ireland

Häfele (Ireland) Limited
Kilcoole, Co. Wicklow
Phone: +353 1/2 87 34 88
info@hafele.ie
www.hafele.ie

Italy

Häfele Italia s.r.l.
20841 Carate Brianza MB
Phone: +39 03 62/57 74-1
info@hafele.it
www.hafele.it

Poland

Häfele Polska Sp. z o.o.
55-095 Mirków
Phone: +48 71/74 72 300
info@hafele.pl
www.hafele.pl

Portugal

Häfele GmbH & Co KG
Escritorio de Vendas Portugal
4465-671 Leça do Balio
Phone: +351 22/9 05 90 80
info-portugal@hafele.com
www.hafele.pt

Romania

Häfele Romania S.R.L.
300238 Timișoara
Phone: +40 2 56/30 61 72
info@hafele.ro
www.hafele.ro

Russia

Häfele Rus. LLC
117420 Moscow
Phone: +7 4 95/7 87 07 85
info@hafele.ru
www.hafele.com/ru

Serbia

Häfele Serbia d.o.o.
11080 Beograd - Zemun
Phone: +381 11/3 77 05 51
info@hafele.rs
www.hafele.rs

Slovenia

Häfele Adriatic d.o.o.
Pod jelkami 2
SI-1218 Komenda
Phone: + 386 (0) 1 620 7200
info@hafele.si
www.hafele.si

Spain

Häfele Herrajes España S.L.
28923 Alcorcón-Madrid
Phone: +34 91/6 44 80 21
info@hafele.es
www.hafele.es

Sweden & Norway

Häfele GmbH & Co KG
Tyskland Filial Sverige
55303 Jönköping
Phone: +46 36/18 00 88
info@hafele.se
www.hafele.se

Switzerland

Häfele Schweiz AG
8280 Kreuzlingen
Phone: +41 71/6 86 82 20
info@hafele.ch
www.hafele.ch

The Netherlands

Häfele Nederland B.V.
7324 AN Apeldoorn
Phone: +31 55/5 38 46 00
info@hafele.nl
www.hafele.nl

Turkey

Häfele San. ve Tic. A.S.
34776 Ümraniye/Istanbul
Phone: +90 2 16/5 28 59 00
info@hafele.com.tr
www.hafele.com.tr

Ukraine

Häfele Ukraine LLC
79037 Lviv
Phone: +380 32/2 35 15 59
info@hafele.ua
www.hafele.ua

AFRICA

South Africa

Häfele South Africa (Pty) Ltd.
Honeydew 2040
Phone: +27 11/7 96 81 00
info@hafele.co.za
www.hafele.co.za

AMERICA

Argentina

Häfele Argentina S.A.
B1611GFG-Don Torcuato-
Buenos Aires
Phone: +54 11/63 47 26 00
info@hafele.com.ar
www.hafele.com.ar

Brazil

Häfele Brasil Ltda.
83302-000 Piraquara-Paraná
Phone: +55 41/30 34-81 50
info@hafele.com.br
www.hafele.com.br

Canada

Häfele Canada Inc.
Burlington, ON L7L 6A8
Phone: +1 9 05/3 36 66 08
info_can@hafeleamericas.com
www.hafele.ca

Chile

Häfele GmbH & Co KG
Agencia en Chile
Las Condes – Santiago
Phone: +56 2/29 54 77 67
info_rch@hafele.cl
www.hafele.cl

Colombia

Häfele Colombia S.A.S.
CRA 55B # 79-45 Bogotá
Phone: +57 1/2 40 20 33
info@hafele.com.co
www.hafele.com.co

Mexico

Häfele de México S.A.de C.V.
El Marqués, Querétaro, 76246
Phone: +52 442/2 96 86 00
hmxinfomexico@hafele.com.mx
www.hafele.com.mx

USA

Häfele America Co.
Archdale, N.C. 27263
Phone: +1 3 36/4 34 23 22
info@hafele.us
www.hafele.com/us

ASIA

China

Häfele Hardware Technology
(China) Co. Ltd.
101318 Beijing
Phone: +86 10/80 48 26 86
info_bj@hafele.com.cn
www.hafele.com.cn

Hong Kong

Häfele GmbH & Co KG
HK Representative Office
Hong Kong
Phone: +852/23 68 64 33
info_hk@hafele.com.cn
www.hafele.com.hk

India

Häfele India Private Limited
Mumbai 400 042
Phone: +91 22/61 42 61 00
info@hafeleindia.com
www.hafeleindia.com

Indonesia

P.T. Häfele Indotama
Serpong-Tangerang 15314
Phone: +62 21/75 87 88 88
info@hafele.co.id
www.hafele.co.id

Japan

Häfele Japan K.K.
Totsuka-ku, Yokohama
244-0806
Phone: +81 45/8 28 31 17
info@hafele.co.jp
www.hafele.co.jp

Kazakhstan

Häfele Kazakhstan LLP
050062 Almaty
Phone: +7 727/3 75 12 98
info@hafele.kz
www.hafele3d.kz

Korea

Häfele Korea Inc.
Gwangju-si, Gyeonggi-do
Phone: +82 31/7 60 76 00
info@hafele.co.kr
www.hafele.co.kr

Malaysia

Häfele (Malaysia) Sdn Bhd
40150 Shah Alam, Selangor
Phone: +60 3/55 69 25 26
info@hafele.com.my
www.hafele.com.my

Myanmar

Häfele (Myanmar) Co., Ltd.
Representative office
Bahan Township, Yangon
Phone: +95 1/53 67 41
info@hafele.com.th
www.hafele.co.th

Philippines

Häfele Philippines Inc.
Taguig City 1638
Metro Manila
Phone: +63 2/8 42 33 53
info@hafele.com.ph
www.hafele.com.ph

Singapore

Häfele Singapore Pte Ltd.
Singapore 415934
Phone: +65/64 94 74 00
info@hafele.com.sg
www.hafele.com.sg

Taiwan

Häfele Taiwan Limited
New Taipei City 242
Phone: +886 2/22 98 00 30
info@hafele.com.tw
www.hafele.com.tw

Thailand

Häfele (Thailand) Limited
Bangkok 10260
Phone: +66 2/7 41 71 71
info@hafele.co.th
www.hafele.co.th

Vietnam

Häfele Vina JSC
Ho Chi Minh City
Phone: +84 8/39 11 31 13
info@hafele.com.vn
www.hafele.com.vn

AUSTRALIA, NEW ZEALAND

Australia

Häfele Australia Pty. Ltd.
Dandenong, VIC 3175
Phone: +61 3/92 12 20 00
info@hafele.com.au
www.hafele.com.au

New Zealand

Häfele (N.Z.) Limited
East Tamaki, Auckland
Phone: +64 9/2 74 20 40
info@hafele.co.nz
www.hafele.co.nz

MIDDLE EAST

Bahrain

Häfele GmbH & Co KG
Representative Office
Manama
Phone: +973 1755 2490
info.bahrain@hafele.com
www.hafele.ae

Kuwait

Häfele GmbH & Co KG
Representative Office
Safat 13096
Phone: +965 2 473 1325
info.kuwait@hafele.com
www.hafele.ae

Qatar

Häfele GmbH & Co KG
Representative Office
Doha
Phone: +974 44 50 26 78
info.qatar@hafele.com
www.hafele.ae

Saudi Arabia

Häfele GmbH & Co KG
Representative Office
Jeddah 21563
Kingdom of Saudi Arabia
Phone: +966 12 6110458
info.jeddah@hafele.com
www.hafele.ae

UAE

Häfele GmbH & Co KG
Representative Office
Dubai
Phone: +971 4 284 4406
info@hafele.ae
www.hafele.ae

Imprint

Reprinting of this catalogue in whole or in part, the copying or imitation of any illustrations and the imitation of the layout are strictly prohibited.

The technical descriptions and dimensions in this catalogue, also those with the photographs and drawings, are not binding.

We reserve the right to alter specifications without notice.

All dimensions in mm, unless stated otherwise.

All deliveries are made pursuant to the Häfele conditions of sale, delivery and payment, which can be inspected at www.hafele.com.

Issued by:

Häfele GmbH & Co KG

Adolf-Häfele-Straße 1

D-72202 Nagold

Phone +49(0)74 52 / 95-0

Fax +49(0)74 52 / 95-2 00

Internet: www.hafele.com

E-mail: info@haefele.de

February 2020

© by Häfele Nagold.

All rights reserved.

Printed in Germany.

Imprimé en Allemagne.

Eco-printing inks with binders made of renewable raw materials and water-based varnishes have been used to print this brochure.

732.02.231-02/20

HÄFELE

732.02.231-02/20

Häfele GmbH & Co KG | Postfach 12 37 | Adolf-Häfele-Straße 1 | D-72202 Nagold
Phone: +49 (0) 7452/95-0 | **Fax:** +49 (0) 74 52 / 95-200 | **E-mail:** info@haefele.de

www.haefele.com